



# Comments on Fuzzy Control Systems Design via Fuzzy Lyapunov Functions

Kevin Guelton, Thierry-Marie Guerra, Miguel Bernal, Tahar Bouarar,  
Nouredine Manamanni

## ► To cite this version:

Kevin Guelton, Thierry-Marie Guerra, Miguel Bernal, Tahar Bouarar, Nouredine Manamanni. Comments on Fuzzy Control Systems Design via Fuzzy Lyapunov Functions. IEEE Transactions on Systems, Man, and Cybernetics, Part B: Cybernetics, Institute of Electrical and Electronics Engineers, 2010, 40 (3), pp.970 - 972. 10.1109/TSMCB.2009.2033807 . hal-00793239

**HAL Id: hal-00793239**

**<https://hal.archives-ouvertes.fr/hal-00793239>**

Submitted on 21 Feb 2013

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Comments on “Fuzzy Control Systems Design via Fuzzy Lyapunov Functions”

K. Guelton, *Member, IEEE*, T.M. Guerra, M. Bernal, T. Bouarar and N. Manamanni, *Member, IEEE*

**Abstract**—This note considers the work untitled “Fuzzy Control Systems Design via Fuzzy Lyapunov Functions” published by J. Li, S. Zhou and S. Xu in IEEE Trans. on SMC part B [1]. In the latter, the authors try to extend the work of Rhee and Won [2]. Nevertheless, the results proposed in [1] have been obtained without taking into account some necessary conditions to ensure the line integral function to be a Lyapunov candidate, and consequently the proposed stability and stabilization conditions are wrong.

**Index Terms**— Fuzzy Lyapunov function, Linear matrix inequality (LMI), Takagi-Sugeno (T-S), fuzzy control system, line integral Lyapunov candidate.

## I. INTRODUCTION

This note considers the work entitled “Fuzzy Control Systems Design via Fuzzy Lyapunov Functions” published by J. Li, S. Zhou and S. Xu in IEEE Trans. on SMC part B [1]. In this paper, the authors propose an extension to the work of Rhee and Won [2]. In the latter, non quadratic stability conditions have been investigated using a line-integral non quadratic Lyapunov Function. This function allows avoiding the membership function derivative in the obtained LMI stability conditions which is the major drawback of classical non quadratic approach. Furthermore, Rhee and Won [2] have proposed an extension to stabilization leading to BMI conditions. In [1], based on a slightly modified line-integral Lyapunov function candidate inspired by [2], the authors intended to provide non quadratic stabilization conditions in the LMI form. Nevertheless, these results have been obtained without taking into account some necessary conditions to ensure the line-integral function to be a Lyapunov function candidate. In this note, it is proved that the proposed stability and stabilization conditions in [1] are wrong. Moreover, it is shown that, to be a non quadratic Lyapunov function candidate, the chosen line-integral function has to fulfill very complex conditions which reduce the interest and applicability of such approach. Finally, an illustrative example is provided that clearly shows that LMI conditions in [1] fail to ensure

global asymptotical stable behavior.

## II. STATEMENT OF THE PROBLEM

In [2], a line-integral fuzzy Lyapunov function candidate has been considered such that:

$$V(x) = 2 \int_{\Gamma(0,x)} f(\psi) \cdot d\psi \quad (1)$$

where  $\Gamma(0,x)$  is the path from the origin to the current state  $x$ ,  $\psi \in \mathbb{R}^n$  is a dummy vector for the integral,  $d\psi \in \mathbb{R}^n$  is an infinitesimal displacement vector,  $f(x) \in \mathbb{R}^n$  is a vector function of the state  $x$  which can be physically regarded as a force vector. Consequently, (1) represents the work in the force vector field as an energy function.

To be a Lyapunov function candidate,  $V(x)$  has to satisfy the following conditions [3]:

- 1)  $V(x)$  is a continuously differentiable function,
- 2)  $V(x)$  is positive definite,
- 3)  $V(x)$  is radially unbounded.

As stated in [2], it is obvious that condition 1) is verified. However, if  $V(x)$  is dependent on the path  $\Gamma(0,x)$ , conditions 2) and 3) would not be satisfied. Hence, it is mandatory to verify the line integral (1) to be path-independent [4].

Let  $f(x) = [f_1(x), \dots, f_n(x)]^T$ , then the necessary and sufficient condition for  $V(x)$  to be path-independent [4] (denoted as lemma 1 in [2]) is given by:

$$\frac{\partial f_i(x)}{\partial x_j} = \frac{\partial f_j(x)}{\partial x_i}, \text{ for } i, j = 1, \dots, n. \quad (2)$$

In [2], a solution satisfying (2) and leading to LMIs (for stability analysis) or BMIs (for stabilization), has been proposed as follows:

$$f(x) = \left( \bar{P} + \sum_{i=1}^r h_i(x) D_i \right) x \quad (3)$$

$$\text{with } \bar{P} = \begin{bmatrix} 0 & p_{12} & \dots & p_{1n} \\ p_{12} & 0 & \dots & p_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ p_{1n} & p_{2n} & \dots & 0 \end{bmatrix}, \quad D_i = \begin{bmatrix} d_{i1} & 0 & \dots & 0 \\ 0 & d_{22} & \ddots & \vdots \\ \vdots & \ddots & \ddots & 0 \\ 0 & \dots & 0 & d_{nn} \end{bmatrix},$$

$\bar{P} + D_i = \bar{P}^T + D_i^T > 0$  under some special arrangements; see [2] for more details.

Note that, due to condition (2), using a line-integral Lyapunov

Manuscript received February 24<sup>th</sup>, 2008.

Kevin Guelton, Tahar Bouarar and Nouredine Manamanni are with the CReSTIC EA 3804, Université de Reims Champagne-Ardenne, UFR Sciences Exactes et Naturelles, Moulin de la Housse, BP 1039, 51687 Reims cedex 2, France (corresponding author: phone: +33(3)26913261; fax: +33(3)26913106; e-mail: kevin.guelton@univ-reims.fr).

Thierry-Marie Guerra and Miguel Bernal are with the LAMIH UMR CNRS 8530, Université de Valenciennes - Le Mont Houy, F-59313 Valenciennes Cedex 09, France.

function candidate necessarily leads to a constrained formulation of the vector  $f(x)$ . In fact, this is the key point of our concern with the work published in [1], since in it the force vector

$$f(x) = P^{-1}(x)x \quad (4)$$

with  $P(x) = \sum_{i=1}^r h_i(x)P_i$  is used to define the line integral (1).

Then, the authors claim [1]:

“it can be proved that  $V(x)$  [i.e. (1) with (4)] satisfies the above conditions 1), 2) and 3). Thus  $V(x)$  can be a Lyapunov candidate.”

Unfortunately, this is not always true and the result is not obvious since they didn't take into account the necessary condition (2) for the line-integral to be path-independent. Therefore, theorems in [1] are wrong since  $\{P_i > 0\}_{i=1}^r$  are not properly conditioned by (3).

Naturally, a questions arises: what assumption on  $P(x)$  should be done to satisfy (2) with (4)? Let us rewrite:

$$P^{-1}(x) = \frac{1}{|P(x)|} U(x) \quad (5)$$

with  $U(x) = [u_{ij}(x)]_{i,j \in \{1, \dots, n\}}$  being the transpose of the cofactors matrix.

We can write each component of (4) such that for  $i = 1, \dots, n$ :

$$f_i(x) = \frac{1}{|P(x)|} \sum_{k=1}^n u_{ik}(x) \cdot x_k \quad (6)$$

Thus, it will lead to very complicated relations (if any) to ensure (2). Indeed, from (6), the following equalities should stand for every  $x \in \mathbb{R}^n$ :

$$\left( \sum_{k=1}^n \left( \frac{\partial u_{ik}(x)}{\partial x_j} - \frac{\partial u_{jk}(x)}{\partial x_i} \right) \cdot x_k + u_{ij}(x) - u_{ji}(x) \right) |P(x)| + \left( \frac{\partial |P(x)|}{\partial x_i} - \frac{\partial |P(x)|}{\partial x_j} \right) \sum_{k=1}^n u_{ik}(x) \cdot x_k = 0 \quad (7)$$

Let us exhibit this fact on the simplest case. Consider  $x = [x_1 \ x_2]^T \in \mathbb{R}^2$  and  $P(x_1) = h_1(x_1)P_1 + h_2(x_1)P_2$ . Since  $h_2 = 1 - h_1$ , one can write  $P(x) = R + h_1(x_1)Q$  with  $R = P_2 = \begin{bmatrix} r_{11} & r_{12} \\ r_{12} & r_{22} \end{bmatrix}$  and  $Q = P_1 - P_2 = \begin{bmatrix} q_{11} & q_{12} \\ q_{12} & q_{22} \end{bmatrix}$ . It yields:

$$f_1(x) = \frac{1}{|P(x_1)|} \left( (r_{22} + h_1(x_1)q_{22})x_1 - (r_{12} + h_1(x_1)q_{12})x_2 \right) \quad (8)$$

and

$$f_2(x) = \frac{1}{|P(x_1)|} \left( -(r_{12} + h_1(x_1)q_{12})x_1 + (r_{11} + h_1(x_1)q_{11})x_2 \right) \quad (9)$$

Let us denote  $|R| = r_{11}r_{22} - r_{12}^2$ ,  $|Q| = q_{11}q_{22} - q_{12}^2$  and  $S = r_{11}q_{22} + q_{11}r_{22} - 2r_{12}q_{12}$ , it is easy to show that:  $|P(x)| = h_1^2(x_1)|Q| + |R| + h_1(x_1)S$ . Then, from (2) it follows:

$$\begin{aligned} |P(x_1)| \frac{\partial h_1}{\partial x_1} (q_{11}x_2 - q_{12}x_1) \\ + \frac{\partial h_1}{\partial x_1} (2h_1(x_1)|Q| + S) \begin{pmatrix} (r_{12} + h_1(x_1)q_{12})x_1 \\ -(r_{11} + h_1(x_1)q_{11})x_2 \end{pmatrix} = 0 \end{aligned} \quad (10)$$

or equivalently:

$$\frac{\partial h_1}{\partial x_1} \left( (h_1^2(x_1)|Q| - |R|)(q_{12}x_1 - q_{11}x_2) + (2h_1(x_1)|Q| + S)(r_{12}x_1 - r_{11}x_2) \right) = 0 \quad (11)$$

which is satisfied for every  $x_1 \in \mathbb{R}$  and  $x_2 \in \mathbb{R}$  if:

$$\frac{\partial h_1}{\partial x_1} \left( (h_1^2(x_1)|Q| - |R|)q_{12} + (2h_1(x_1)|Q| + S)r_{12} \right) x_1 = 0 \quad (12)$$

and

$$\frac{\partial h_1}{\partial x_1} \left( (h_1^2(x_1)|Q| - |R|)q_{11} + (2h_1(x_1)|Q| + S)r_{11} \right) x_2 = 0 \quad (13)$$

Note that  $r_{11} > 0$  because of  $R = R^T > 0$ ; therefore  $|Q| = 0$  is mandatory implying  $q_{12} = \pm \sqrt{q_{11}q_{22}}$ . Then, the conditions to be satisfied are:

$$-|R|q_{12} + Sr_{12} = 0 \quad (14)$$

and

$$-|R|q_{11} + Sr_{11} = 0. \quad (15)$$

Several solutions are possible:

1) Recalling that  $r_{11} > 0$ , a first possibility is  $S = 0$  and consequently  $q_{11} = q_{12} = 0$  as  $|R| > 0$ . Given that  $S = r_{11}q_{22} + q_{11}r_{22} - 2r_{12}q_{12} = 0$ ,  $S = 0$  implies  $q_{22} = 0$  and in conclusion  $Q = 0$ , which resumes to the classical quadratic case. Consequently, this case doesn't help the author's objective of deriving non quadratic stability conditions

without knowledge on the time-derivative membership function.

2) Another possibility stands for  $S \neq 0$  leading to  $q_{11} \neq 0$  and  $q_{12} \neq 0$ . Note that  $q_{12} = \pm\sqrt{q_{11}q_{22}}$  also implies  $q_{22} \neq 0$ .

Thus, one can extract  $\frac{|R|}{S} = \frac{r_{12}}{q_{12}} = \frac{r_{11}}{q_{11}}$  or equivalently:

$$r_{12} = r_{11} \frac{q_{12}}{q_{11}} = \pm r_{11} \sqrt{\frac{q_{22}}{q_{11}}}. \text{ Then after some easy manipulations}$$

one has  $S = q_{11}r_{22} - r_{11}q_{22}$  and  $|R| = r_{11}r_{22} - r_{11}^2 \frac{q_{22}}{q_{11}}$ . Therefore,

by choosing the following matrices:

$$R = \begin{bmatrix} r_{11} & \pm r_{11} \sqrt{\frac{q_{22}}{q_{11}}} \\ \pm r_{11} \sqrt{\frac{q_{22}}{q_{11}}} & r_{22} \end{bmatrix}, \quad Q = \begin{bmatrix} q_{11} & \pm \sqrt{q_{11}q_{22}} \\ \pm \sqrt{q_{11}q_{22}} & q_{22} \end{bmatrix},$$

$P(x) = R + h_1(x_1)Q$  is a possible solution for path independence if conditions  $R > 0$  and  $R + Q > 0$  are satisfied.

Note that this simple two-rule second-order example leads to complex and constrained conditions for path independence. Consequently, generalizing this result may lead to very complicated and probably unfruitful stability conditions which reduce the interest of such approaches.

### III. ILLUSTRATIVE UNSTABLE EXAMPLE

Let us consider the following TS model:

$$\dot{x} = \sum_{i=1}^4 h_i(x) (A_i x + B_i u), \quad (16)$$

$$\text{where } A_1 = \begin{bmatrix} 1 & -10 \\ 0 & 1 \end{bmatrix}, \quad A_2 = \begin{bmatrix} 0.8 & -11 \\ 0 & 1.3 \end{bmatrix}, \quad A_3 = \begin{bmatrix} 0.9 & -1 \\ 0 & 1.2 \end{bmatrix},$$

$$A_4 = \begin{bmatrix} 2 & 0 \\ 10 & 0 \end{bmatrix}, \quad B_1 = B_2 = \begin{bmatrix} 1 \\ 1 \end{bmatrix}, \quad B_3 = \begin{bmatrix} -1 \\ 2 \end{bmatrix} \text{ and } B_4 = \begin{bmatrix} -1 \\ 30 \end{bmatrix}.$$

According to the authors, T-S model (16) under control law

$$u(t) = \sum_{i=1}^4 h_i(x) N_i \left( \sum_{j=1}^4 h_j(x) P_j \right)^{-1} x \quad (17)$$

is asymptotically stable, with  $P_i$ ,  $N_i$ ,  $i = 1, \dots, 4$ , satisfying LMIs in Theorem 4 of [1]. Therefore, since matrices

$$P_1 = \begin{bmatrix} 17.7252 & 8.2080 \\ 8.2080 & 6.5760 \end{bmatrix}, \quad P_2 = \begin{bmatrix} 19.6434 & 7.8336 \\ 7.8336 & 6.3412 \end{bmatrix},$$

$$P_3 = \begin{bmatrix} 1.3766 & -2.7913 \\ -2.7913 & 12.4234 \end{bmatrix}, \quad P_4 = \begin{bmatrix} 0.0366 & -1.6015 \\ -1.6015 & 197.3652 \end{bmatrix},$$

$$N_1 = [59.0848 \quad -9.7748], \quad N_2 = [64.9897 \quad -11.6187],$$

$$N_3 = [6.1237 \quad -8.1063], \quad N_4 = [0.1188 \quad 0.3410]$$

satisfy LMIs in Theorem 4 of [1], TS model (16) is expected to be globally asymptotically stable under control law (17).

Results in [1] do not define any particular set of membership functions  $h_i(x)$  for which Theorem 4 can be applied, since they are irrelevant for its conditions. Consider then

$$w_1(x_1) = 1 - \cos^2(x_1) \quad \text{and} \quad w_2(x_2) = \frac{e^{\cos(x_2)}}{1 + e^{\cos(x_2)}} (1 - \sin^2(x_2))$$

to define membership functions  $h_1 = w_1 w_2$ ,  $h_2 = w_1 (1 - w_2)$ ,  $h_3 = (1 - w_1) w_2$ , and  $h_4 = (1 - w_1) (1 - w_2)$ .

Fig. 1 shows the evolution of the states for TS model (16) under control law (17), from initial conditions  $(x_1, x_2) = (-5, 5)$ ,  $(x_1, x_2) = (5, -5)$  and  $(x_1, x_2) = (-0.5, 0.5)$ . Although conditions in Theorem 4 of [1] have been fulfilled, the so-called controlled model remains unstable, since the trajectories converge towards a limit cycle. This shows that the proposed conditions failed to ensure any stable behavior.

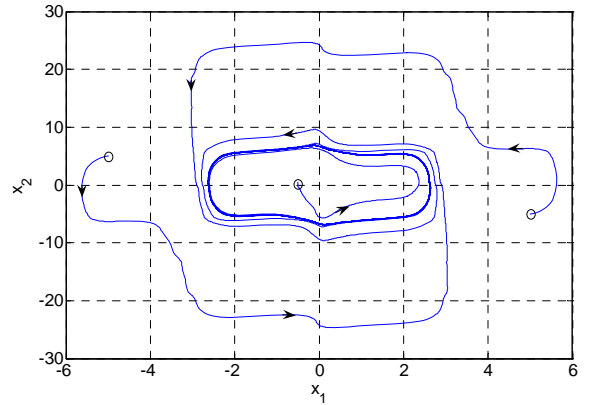


Fig. 1: Evolution of the states of TS model (16) under control law (17).

### REFERENCES

- [1] J. Li, S. Zhou and S. Xu, "Fuzzy Control Systems design via Fuzzy Lyapunov Functions", IEEE Transaction on Systems, Man, and Cybernetics – Part B, vol. 38 n° 6, pp. 1657-1661, 2008.
- [2] B.J. Rhee and S. Won, "A new fuzzy Lyapunov function approach for a Takagi-Sugeno fuzzy control system design", Fuzzy Sets and Systems, vol. 157, pp. 1211-1228, 2008.
- [3] H.K. Khalil, Nonlinear systems, third ed., Prentice-Hall, Upper Saddle River, NJ, 2002.
- [4] D.G. Zill, M.R. Gullen, Advanced Engineering Mathematics, second ed., Jones and Bartlett, London, UK, 2000