

A thermo-mechanical model for TSTs based on TRIP, and numerical treatment

G. Antoni^{1,2}, T. Désoyer^{1,3}, F. Lebon^{1,2*}

¹⁾ Laboratoire de Mécanique et d'Acoustique, CNRS, UPR7051, F13402 Marseille Cedex 20, France.

²⁾ Université Aix-Marseille, Marseille, France.

³⁾ Ecole Centrale de Marseille, Technopole de Château-Gombert, 38, rue Joliot Curie, F13451 Marseille Cedex 20, France.

*Corresponding author for tribo-lyon2013@sciencesconf.org

1. Summary

Some of the French railroad network's rails have been affected for the last about twenty years by an undesirable physical phenomenon known as Tribological Surface Transformations (TSTs), which are irreversible, quasi-surface solid-solid phase transformations. Although the physical causes of TSTs have not yet been clearly established, it seems likely that the mechanical loads combined with the thermal effects of the wheel/rail contacts may be largely responsible. The present study is based on the assumption that the combined thermo-mechanical constraints may generate solid-solid phase transformations.

Two thermo-mechanical models developed on these lines were based on previous studies on Transformation Induced Plasticity (TRIP), which are extended here to account for TSTs.

Based on non-standard generalized materials framework, the two models are presented with an "associative" plastic flow linked to classical plasticity and a "non-associative" flow rule for the TRIP-like plasticity [1,2]. The ability of these models to describe TSTs initiation and development is also assessed by performing a 2-D finite element analysis [3,4]. The complete algorithmic treatment of the constitutive models is presented with the consistent tangent operator associated. The efficiency and robustness of the present algorithmic framework for modeling the two plasticity processes – which can exist in the irreversible solid-solid phase transformations – is assessed for some numerical examples.

2. References

[1] Antoni, G., Désoyer, T., Lebon, F. "A thermo-mechanical modelling of the Tribological Transformations of Surface, Comptes Rendus Mécanique, 337 (2009) 653-658.

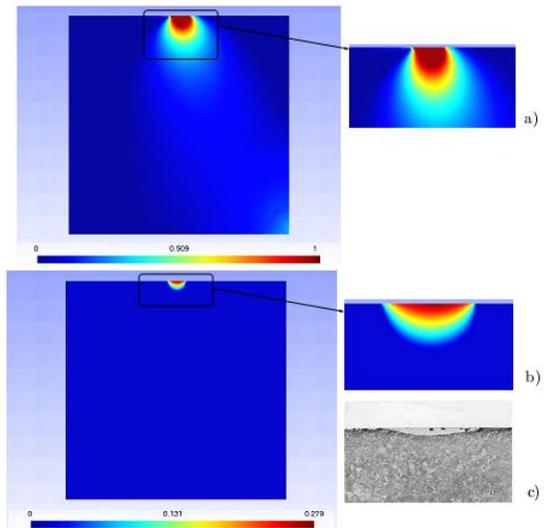


Fig.1 Phase transformation a) b) for the two models c) and Transverse cross-section of the top of a rail showing TSTs (from Osterle et al. [5])

- [2] Antoni, G., Désoyer, T., Lebon, F. "A combined thermo-mechanical model for Tribological Surface Transformations", *Mechanics of Materials* 49 (2012) 92–99.
- [3] Antoni, G., Lebon, F., Désoyer, T. "Return Mapping Algorithms (RMAs) for two-yield surface thermo-viscoplastic models using the consistent tangent operator", *Computers & Structures*, in revision.
- [4] M. Abbas, "Algorithme non linéaire quasi-statique", Code Aster Technical Note, R50301 (2013) France.
- [5] Osterle, W., Rooch, H., Pyzalla, A., Wang, L. "Investigation of white etching layers on rails by optical microscopy, electron microscopy, X-ray and synchrotron X-ray diffraction", *Materials Science and Engineering: A* 303 (2001) 150-157.