

## Virtual charts for shape optimization of structures

Amaury Courard, David Néron, Pierre Ladevèze, Philippe Andolfatto, Alain Bergerot

► **To cite this version:**

Amaury Courard, David Néron, Pierre Ladevèze, Philippe Andolfatto, Alain Bergerot. Virtual charts for shape optimization of structures. 2nd ECCOMAS Young Investigators Conference (YIC 2013), Sep 2013, Bordeaux, France. <hal-00855876>

**HAL Id: hal-00855876**

**<https://hal.archives-ouvertes.fr/hal-00855876>**

Submitted on 30 Aug 2013

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Virtual charts for shape optimization of structures

A. Courard<sup>a b,\*</sup>, D. Néron<sup>a</sup>, P. Ladevèze<sup>a</sup>, P. Andolfatto<sup>b</sup>, A. Bergerot<sup>b</sup>

<sup>a</sup> LMT-Cachan (ENS Cachan/CNRS/UPMC/PRES UniverSud)  
61 avenue du Président Wilson  
94235 Cachan Cedex France

<sup>b</sup> EADS-ASTRIUM Space Transportation  
B.P. 20011  
33165 St Médard en Jalles Cedex France

\*courard@lmt.ens-cachan.fr

---

**Abstract.** *The paper presents the concept of “Virtual Charts” applied to computational structural mechanics. Based on the Proper Generalized Decomposition (PGD), a model reduction method, the idea is to create a numerical tool to help engineers to perform shape optimization, where quantities of interest, computed for all the geometrical configurations, will be stored. Two different approaches have been developed in order to introduce geometry variations as parameters in the PGD. Promising results were obtained for academic examples.*

**Keywords:** pgd; virtual chart; shape optimization; model reduction.

---

## 1 INTRODUCTION

Despite constant progress in computing power over the past years, experimental testing is still essential during design stage of industrial structures because numerical resolution of high sized complex models often remains out of reach. And even when it is possible, each new structure is considered as a new problem, and treated independently of cases previously studied. Therefore, a very large number of simulations have to be computed. The use of experimental testing combined to the calculation of many simulations increases time and financial costs. Hence, the reduction of these costs is a crucial industrial issue.

The idea, developed here, consists in putting together similar structures, which differ from each other for the values given to some parameters, in “families” and to compute offline the general parametrized solution for each family. The quantities of interest, used for structural design, are stored in “Virtual Charts”, which will be used online by the engineer during the conception step. Hence the conception time will be highly reduced due to the fact that all is remaining for the engineer is to particularize the general solution with the values of the considered parameters.

The construction of these charts is based on the model reduction method called Proper Generalized Decomposition (PGD) introduced for the first time in 1985 by P. Ladevèze under the name “Radial Approximation” [1] in order to deal with time-dependent non-linear problems. It allows to generate the solution of a problem for a whole set of parameters and its efficiency was proven for time-space [2], multiscale [3], multiphysics [4] and parametrized problems [5]. In the framework of this study in partnership with ASTRIUM-ST, the virtual charts are created to take into account geometry variations, which are a key point of the conception process. The geometry variations are considered as parameters in the PGD method and the quantities of interest are computed from the resolution of adjoint problems setting up some error estimators that allow to master the simulations.

First of all, after a short review on the PGD method, we present two different strategies developed to adapt the Proper Generalized Decomposition to geometry variations and then the capabilities of these two methods are discussed through a bidimensional academic example.

## 2 PROPER GENERALIZED DECOMPOSITION AND GEOMETRY VARIATIONS

### 2.1 Proper Generalized Decomposition

An extended presentation of the PGD method can be read in [6] and a detailed bibliography in [7]. The PGD method is based on the idea that the solution can be approximated with a good precision thanks to a reduced number of modes. One can notice the analogy with dynamics where the major part of the information is contained in the first modes and while new modes are added, the solution is enriched.

For this purpose, a separated variables representation of an unknown field  $f$  is sought. An example of a PGD approximation is given below for a time-space problem:

$$\forall(\underline{M}, t) \in \Omega \times [0, T], f(\underline{M}, t) \approx \hat{f}_n(\underline{M}, t) = \sum_{i=1}^n \lambda_i(t) \Lambda_i(\underline{M}) \quad (1)$$

where  $\Lambda_i$  are the spatial modes and  $\lambda_i$  are the time functions.

In practical cases,  $n$  happens to be very small so the computation and storage costs are highly reduced. Furthermore, the functions  $\lambda_i$  and  $\Lambda_i$  are not given *a priori*. They will be computed through an iterative process.

This method can be easily extend to parametric and multidimensional problems as shown in Equation (2).

$$f(\underline{M}, t, \alpha_1, \dots, \alpha_k) \approx \hat{f}_n(\underline{M}, t, \alpha_1, \dots, \alpha_k) = \sum_{i=1}^n f_i^1(\alpha_1) \dots f_i^k(\alpha_k) \lambda_i(t) \Lambda_i(\underline{M}) \quad (2)$$

where  $\alpha_1, \dots, \alpha_k$  are the parameters defining the geometry.

The aim is to build the solution for all the geometrical configurations, i.e. for all the values of  $\alpha_1, \dots, \alpha_k$ . A quantity of interest can be, then, determined and stored in a Virtual Chart.

### 2.2 Example

Figure 1 presents an example of structure to optimize with respect to two geometrical dimensions and where the Von Mises stress maximum was considered as a quantity of interest.  $\alpha$  and  $\beta$  denote the geometrical parameters associated, respectively to a length and a radius of curvature to take into account in the PGD method. The structure is clamped and a constant load is applied on the opposite extremity. It remains to adapt the PGD method in order to introduce geometry variations.

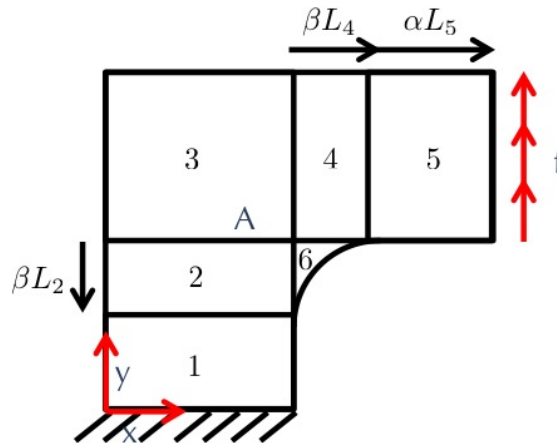


Figure 1: Test structure

### 2.3 Method 1

A reference structure  $\Omega_0$  is defined and meshed. Then, for each configuration  $\Omega_{\alpha}$ , corresponding to a geometrical configuration parametrized by  $\alpha = \{\alpha_1, \dots, \alpha_k\}$ , it is possible to go back to the reference structure thanks to geometric transformations [8], as shown in Equation (4). For this purpose, one writes the variational formulation of the parametric problem:

$$\forall \delta \underline{u} \in \mathcal{U}^*, \iint_{\mathcal{A} \Omega_{\alpha}} \boldsymbol{\varepsilon}(\underline{u}(\underline{M}, \boldsymbol{\alpha})) : \boldsymbol{\kappa} \boldsymbol{\varepsilon}(\delta \underline{u}(\underline{M}, \boldsymbol{\alpha})) \, d\boldsymbol{\alpha} d\Omega = \int \int_{\mathcal{A} \partial_f \Omega_{\alpha}} \underline{f}^T \delta \underline{u}(\underline{M}, \boldsymbol{\alpha}) \, d\boldsymbol{\alpha} d\Gamma \quad (3)$$

- $\mathcal{A}$ : space of geometrical parameters where  $\boldsymbol{\alpha}$  belongs
- $\boldsymbol{\varepsilon}$ : strain field
- $\boldsymbol{\kappa}$ : hooke's tensor
- $\underline{u}$ : displacement vector
- $\underline{f}$ : load vector

It is, then, possible to study the problem with respect to the reference structure thanks to a change of variables.

$$\forall \delta \underline{u} \in \mathcal{U}^*, \iint_{\mathcal{A} \Omega_0} \boldsymbol{\varepsilon}(\underline{u}(\underline{M}_0, \boldsymbol{\alpha})) : \boldsymbol{\kappa} \boldsymbol{\varepsilon}(\delta \underline{u}(\underline{M}_0, \boldsymbol{\alpha})) |\det \underline{J}_{\boldsymbol{\alpha}}| \, d\boldsymbol{\alpha} d\Omega = \int \int_{\mathcal{A} \partial_f \Omega_0} \underline{f}^T \delta \underline{u}(\underline{M}_0, \boldsymbol{\alpha}) \, d\boldsymbol{\alpha} d\Gamma \quad (4)$$

where  $\underline{J}_{\boldsymbol{\alpha}}$  is the Jacobian matrix of the geometric transformation which transforms  $\Omega_0$  in  $\Omega_{\alpha}$ :

$$\forall \underline{M}_0 \in \Omega_0, \underline{M} = T(\underline{M}_0) \in \Omega_{\alpha} \quad (5)$$

The unknown field, here the displacement  $\underline{u}$ , is sought in the form of a separated variables representation:

$$\underline{u}(\underline{M}_0, \boldsymbol{\alpha}) \approx \sum_{i=1}^n g_i(\boldsymbol{\alpha}) U_i(\underline{M}_0) \quad (6)$$

## 2.4 Method 2

In this method, the reference structure  $\Omega_0$  is defined as the union of all the different geometric configurations  $\Omega_{\alpha}$ . For each geometric configuration, the structure is like "sunk" in a very soft material. A new constitutive has to be defined on  $\Omega_0$ :

$$\tilde{\boldsymbol{\kappa}} = \boldsymbol{\kappa} \psi_{\boldsymbol{\alpha}} + a \boldsymbol{\kappa} (1 - \psi_{\boldsymbol{\alpha}}) \text{ with } a \ll 1 \quad (7)$$

where

$$\begin{cases} \psi_{\boldsymbol{\alpha}}(\underline{M}) & = 1 \text{ if } \underline{M} \in \Omega_{\alpha} \\ & = 0 \text{ otherwise} \end{cases} \quad (8)$$

To compute the stiffness matrix of a finite element, one made the assumption that the reference structure is very finely meshed and so the stiffness matrix becomes:

$$\tilde{\underline{K}}_{el} = \begin{cases} \underline{K}_{el} & \text{if the whole element belongs to } \Omega_{\alpha} \\ a \underline{K}_{el} & \text{otherwise} \end{cases} \quad (9)$$

where  $\underline{K}_{el}$  is the classic stiffness matrix of a finite element computed with the constitutive law  $\boldsymbol{\kappa}$ .

Then the displacement  $\underline{u}$  is written in the form of a PGD approximation and the problem is solved on the reference structure.

## 2.5 Results

Both methods were tested on the example presented in Section 2.2. Figure 2a depicts the convergence of method 1 with respect to the number of PGD couples computed. It can be noticed that, with only four couples, a error inferior to 1% is reached. The error was calculated with respect to a reference solution computed thanks to a EF resolution for each geometrical configuration. An example of virtual chart built with this method is also presented in Figure 2b where the quantity of interest considered is the maximum of the Von Mises stress.

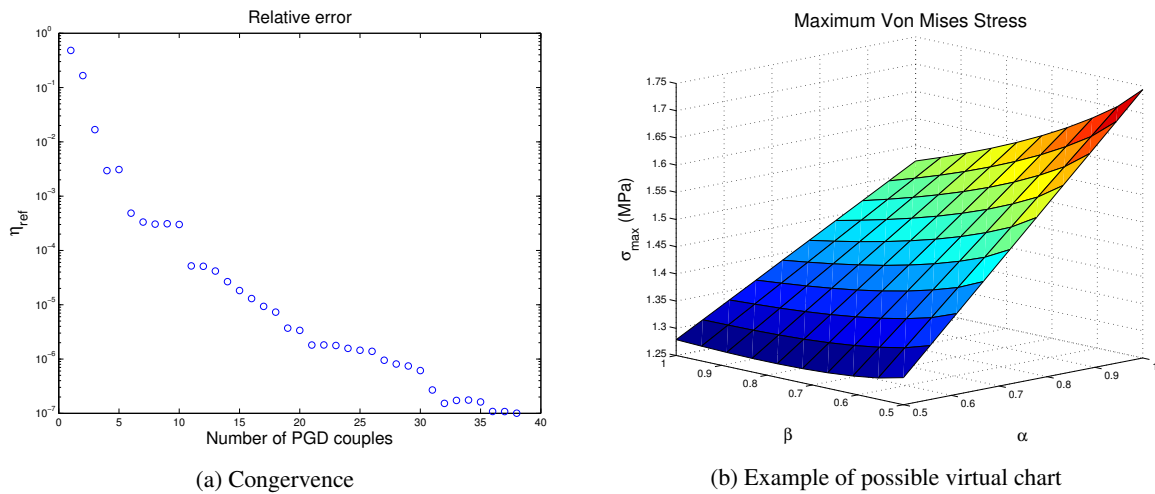


Figure 2: Results of a simulation using method 1

### 3 CONCLUSIONS

Two different approaches were introduced within the Proper Generalized Decomposition framework and used in academic examples where geometry variations were introduced as parameters. It was, then, possible to build “Virtual Charts” for quantities of interest, used for structural design. The next step is to apply these methods for more complex problems in order to approach the industrial issues of ASTRIUM-ST. In the example presented in this article, the quantity of interest (maximum of the Von Mises stress) was computed from the direct problem. The next step will be to determine the quantities of interest from the resolution of adjoint problems with error estimators.

### REFERENCES

- [1] Ladevèze, P. The large time increment method for the analyse of structures with nonlinear constitutive relation described by internal variables. *Compte rendu de l'académie des Sciences*. **309**:1095-1099, 1989.
- [2] Ladevèze, P. *Nonlinear Computational Structural Mechanics – New Approaches and Non-Incremental Methods of Calculation*. Springer Verlag, 1999.
- [3] Ladevèze, P., Passieux, J.-C., Néron, D.. The LATIN multiscale computational method and the Proper Generalized Decomposition. *Computer Methods in Applied Mechanics and Engineering*. **199**:1287-1296, 2010.
- [4] Néron, D., Ladevèze, P. Proper Generalized Decomposition for Multiscale and Multiphysics Problems. *Archives of Computational Methods in Engineering*. **17**:351-372, 2010.
- [5] Chinesta, F., Ammar, A., Keunings, R.. An overview of the proper generalized decomposition with applications in computational rheology. *Journal of Non-Newtonian Fluid Mechanics*. **166**:578-592, 2011.
- [6] Nouy, A.. A priori model reduction through Proper Generalized Decomposition. *Computer Methods in Applied Mechanics and Engineering*. **199**:1603-1626, 2010.
- [7] Chinesta, F., Ladevèze, P., Cueto, E.. A short review on model order reduction based on Proper Generalized Decomposition. *Archives of Computational Methods in Engineering*. **18**:395-404, 2011
- [8] Ghnatios, C., Ammar, A., Cimetire, A., Hamdouni, A., Leygue, A., Chinesta, F. First steps in the space separated representation of models defined in complex domains. In: *Proceedings of the ASME 2012 11th Biennial Conference On Engineering Systems Design and Analysis*., Nantes, France, 2-4 July 2012.