

Traffic Regulation Via Controlled Speed Limit

Maria Laura Delle Monache, Benedetto Piccoli, Francesco Rossi

► **To cite this version:**

Maria Laura Delle Monache, Benedetto Piccoli, Francesco Rossi. Traffic Regulation Via Controlled Speed Limit. SIAM Journal on Control and Optimization, Society for Industrial and Applied Mathematics, 2017, 55 (5), pp.2936-2958. <<https://doi.org/10.1137/16M1066038>>. <hal-01577927>

HAL Id: hal-01577927

<https://hal.archives-ouvertes.fr/hal-01577927>

Submitted on 28 Aug 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

TRAFFIC REGULATION VIA CONTROLLED SPEED LIMIT*

MARIA LAURA DELLE MONACHE[†], BENEDETTO PICCOLI[‡], AND FRANCESCO ROSSI[§]

Abstract. We study an optimal control problem for traffic regulation via variable speed limit. The traffic flow dynamics is described with the Lighthill-Whitham-Richards (LWR) model with Newell-Daganzo flux function. We aim at minimizing the L^2 quadratic error to a desired outflow, given an inflow on a single road. We first provide existence of a minimizer and compute analytically the cost functional variations due to needle-like variation in the control policy. Then, we compare three strategies: instantaneous policy; random exploration of control space; steepest descent using numerical expression of gradient. We show that the gradient technique is able to achieve a cost within 10% of random exploration minimum with better computational performances.

Key words. Traffic problems, Optimal control problem, Variable speed limit

AMS subject classifications. 90B20, 35L65, 49J20

1. Introduction. In this paper, we study an optimal control problem for traffic flow on a single road using a variable speed limit¹. The first traffic flow models on a single road of infinite length using a non-linear scalar hyperbolic partial differential equation (PDE) are due to Lighthill and Whitham [33] and, independently, Richards [35], which in the 1950s proposed a fluid dynamic model to describe traffic flow. Later on, the model was extended to networks [20] and started to be used to control and optimize traffic flow on roads. In the last decade, several authors studied optimization and control of conservation laws and several papers proposed different approaches to optimization of hyperbolic PDEs, see [5, 19, 21, 24, 31, 36, 37] and references therein. These techniques were then employed to optimize traffic flow through, for example, inflow regulation [12], ramp-metering [34] and variable speed limit [22]. We focus on the last approach, where the control is given by the maximal speed allowed on the road. Notice that also the engineering literature presents a wealth of approaches [1, 2, 10, 11, 13, 15, 25, 26, 27, 28, 29, 30, 38], but mostly in the time discrete setting. In [1, 2] a dynamic feedback control law is employed to compute variable speed limits using a discrete macroscopic model. Instead, [25, 26, 27] use model predictive control (MPC) to optimally coordinate variable speed limits for freeway traffic with the aim of suppressing shock waves.

In this paper, we address the speed limit problem on a single road. The control variable is the maximal allowed velocity, which may vary in time but we assume to be of bounded total variation, and we aim at tracking a given target outgoing flow. More precisely, the main goal is to minimize the quadratic difference between the achieved outflow and the given target outflow. Mathematically the problem is very hard, because of the delays in the effect of the control variable (speed limit). In fact, the Link Entering Time (LET) $\tau(t)$, which represents the entering time of the car

*This research was supported by the NSF grant CNS #1446715 and by KI-Net "Kinetic description of emerging challenges in multiscale problems of natural sciences" - NSF grant # 1107444. The third author acknowledges the support of the ANR project CroCo ANR-16-CE33-0008.

[†]Department of Mathematical Sciences, Rutgers University - Camden, Camden, NJ, USA and Inria, Univ. Grenoble Alpes, CNRS, GIPSA-lab, F-38000 Grenoble, France (ml.dellemonache@inria.fr).

[‡]Department of Mathematical Sciences and CCIB, Rutgers University - Camden, Camden, NJ USA (piccoli@camden.rutgers.edu).

[§]Aix Marseille Université, CNRS, ENSAM, Université de Toulon, LISIS UMR 7296,13397, Marseille, France (francesco.rossi@lisis.org).

¹Part of this work has been submitted to the American Control Conference 2016.

38 exiting the road at time t see (7), depends on the given inflow and the control policy
 39 on the whole time interval $[\tau(t), t]$. Moreover, the input-output map is defined in
 40 terms of LET, thus the achieved outflow at time t depends on the control variable on
 41 the whole interval $[\tau(t), t]$. Due to the complexity of the problem, in this article we
 42 restrict the problem to free flow conditions. Notice that this assumption is not too
 43 restrictive. Indeed, if the road is initially in free flow, then it will keep the free flow
 44 condition due to properties of the LWR model, see [9, Lemma 1].

45 After formulating the optimal control problem, we consider needle-like variations for
 46 the control policy as used in the classical Pontryagin Maximum Principle [8]. We
 47 are able to derive an analytical expression of the one-sided variation of the cost,
 48 corresponding to needle-like variations of the control policy, using fine properties of
 49 functions with bounded variation. In particular the one-sided variations depend on
 50 the sign of the control variation and involves integrals w.r.t. to the distributional
 51 derivative of the solution as a measure, see (10). This allows us to prove Lipschitz
 52 continuity of the cost functional in the space of bounded variation function and prove
 53 existence of a solution.

54 Afterwards, we define three different techniques to solve numerically this problem.

- 55 • Instantaneous Policy (IP). We design a closed-loop policy, which depends
 56 only on the instantaneous density at road exit. More precisely, we choose the
 57 speed limit which gives the nearest outflow to the desired one.
- 58 • Random Exploration (RE). It uses time discretization and random binary
 59 tree search of the control space to find the best maximal velocity profile.
- 60 • Gradient Descent Method (GDM). It consists in approximating numerically
 61 the gradient of the cost functional using (10) combined with a steepest descent
 62 method.

63 We compare the three approaches on two test cases: constant desired outflow and
 64 sinusoidal inflow; sinusoidal desired outflow and inflow. In both cases RE provides
 65 the best control policy, however GDM performs within 10% of best RE result with
 66 a computational cost of around 15% of RE. On the other side, IP performs poorly
 67 with respect to the RE, but with a very low computational cost. Notice that, in some
 68 cases, IP may be the only practical policy, while GDM represents a valid approach
 69 also for real-time control, due to good performances and reasonable computational
 70 costs. Moreover, control policies provided by RE may have too large total variation
 71 to be of practical use.

72 The paper is organized as follows: section 2 gives the description of the traffic flow
 73 model and of the optimal control problem. Moreover, the existence of a solution
 74 is proved. In section 3, the three different approaches to find control policies are
 75 described. Then in section 4, these techniques are implemented on two test cases.
 76 Final remarks and future work are discussed in section 5.

77 **2. Mathematical model.** In this section, we introduce a mathematical frame-
 78 work for the speed regulation problem. The traffic dynamics is based on the classical
 79 Lighthil-Whitham-Richards (LWR) model ([33, 35]), while the optimization problem
 80 will seek minimizers of quadratic distance to an assigned outflow.

81 **2.1. Traffic flow modeling.** We consider the LWR model on a single road of
 82 length L to describe the traffic dynamics. The evolution in time of the car density
 83 ρ is described by a Cauchy problem for scalar conservation law with time dependent

84 maximal speed $v(t)$:

85 (1)
$$\begin{cases} \rho_t + f(\rho, v(t))_x = 0, & (t, x) \in \mathbb{R}^+ \times [0, L], \\ \rho(0, x) = \rho_0(x), & x \in [0, L], \end{cases}$$

86 where $\rho = \rho(t, x) \in [0, \rho_{\max}]$ with ρ_{\max} the maximal car density. In the transportation
 87 literature the graph of the flux function $\rho \rightarrow f(\rho)$ (in our case for a fixed $v(t)$) is
 88 commonly referred to as the fundamental diagram. Throughout the paper, we focus
 89 on the Newell - Daganzo - type ([14]) fundamental diagrams, see Figure 1b. The speed
 90 takes value on a bounded interval $v(t) \in [v_{\min}, v_{\max}]$, $0 < v_{\min} \leq v_{\max}$, thus the flux
 91 function $f : [0, \rho_{\max}] \times [v_{\min}, v_{\max}] \rightarrow \mathbb{R}^+$ is given by

92 (2)
$$f(\rho, v(t)) = \begin{cases} \rho v(t), & \text{if } 0 \leq \rho \leq \rho_{\text{cr}}, \\ \frac{v(t)\rho_{\text{cr}}}{\rho_{\max} - \rho_{\text{cr}}}(\rho_{\max} - \rho), & \text{if } \rho_{\text{cr}} < \rho \leq \rho_{\max}, \end{cases}$$

93 with $v(t)$ representing the maximal speed, see Figure 1a. Notice that the flow is
 94 increasing up to a *critical density* ρ_{cr} and then decreasing. The interval $[0, \rho_{\text{cr}}]$ is
 95 referred to as the *free flow zone*, while $[\rho_{\text{cr}}, \rho_{\max}]$ is referred to as the *congested flow*
 96 *zone*.

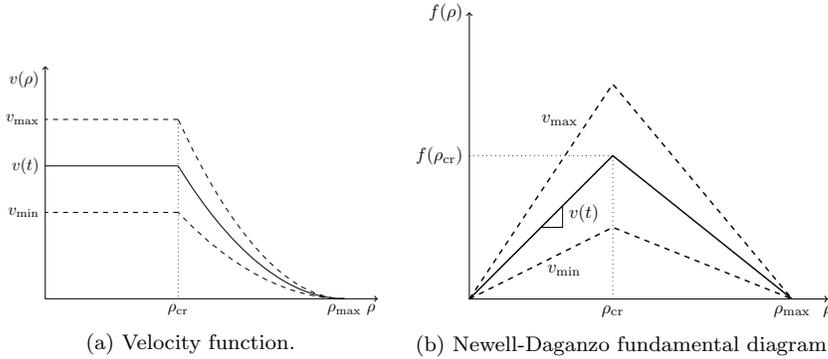


Fig. 1: Velocity and flow for different speed limits.

97

98 The problem we consider is the following. Given an inflow $\text{In}(t)$, we want to track
 99 a fixed outflow $\text{Out}(t)$ on a time horizon $[0, T]$, $T > 0$, by acting on the time-dependent
 100 maximal velocity $v(t)$. A maximal velocity function $v : [0, T] \rightarrow [v_{\min}, v_{\max}]$ is called
 101 a **control policy**.

102 It is easy to see that a road in free flow can become congested only because of the
 103 outflow regulation with shocks moving backward, see [9, Lemma 2.3]. Since we assume
 104 Neumann boundary conditions at the road exit, the traffic will always remain in free
 105 flow, i.e. $\rho(t, x) \leq \rho_{\text{cr}}$ for every $(t, x) \in [0, T] \times [0, L]$. Given the inflow function
 106 $\text{In}(t)$, we consider the Initial Boundary Value Problem with assigned flow boundary
 107 condition $f_l \doteq f(\rho(t, 0^+))$ on the left in the sense of Bardos, Le Roux and Nedelec,

108 see [6] and Neumann boundary condition (flow $f_r \doteq f(\rho(t, 0^-))$) on the right:

$$109 \quad (3) \quad \begin{cases} \rho_t + f(\rho, v(t))_x = 0, & (t, x) \in \mathbb{R}^+ \times [0, L], \\ \rho(0, x) = \rho_0(x), & x \in [0, L], \\ f_l(t) = \text{In}(t), \\ f_r(t) = \rho(t, L) v(t). \end{cases}$$

110 We denote by BV the space of scalar functions of bounded variations and by TV the
111 total variation, see [7] for details. For any scalar BV function h we denote by $\xi(x^\pm)$
112 its right (respectively left) limit at x . We further assume the following:

113 *Hypothesis 1.* There exists $0 < \rho_0^{\min} \leq \rho_0^{\max} \leq \rho_{\text{cr}}$ and $0 < f_{\min} \leq f_{\max}$ such that
114 $\rho_0 \in \text{BV}([0, L], [\rho_0^{\min}, \rho_0^{\max}])$ and $\text{In} \in \text{BV}([0, T], [f_{\min}, f_{\max}])$.

115 Under this assumption, we have:

PROPOSITION 2. Assume that *Hypothesis 1* holds and

$$v \in \text{BV}([0, T], [v_{\min}, v_{\max}]).$$

116 Then, there exists a unique entropy solution $\rho(t, x)$ to (3). Moreover, $\rho(t, x) \leq \rho_{\text{cr}}$
117 and, setting

$$118 \quad (4) \quad \text{Out}(t) = \rho(t, L)v(t),$$

119 we have that $\text{Out}(\cdot) \in \text{BV}([0, T], \mathbb{R})$ and the following estimates hold

$$120 \quad (5) \quad \min \left\{ \rho_0^{\min}, \frac{f_{\min}}{v_{\max}} \right\} \leq \rho(t, x) \leq \max \left\{ \rho_0^{\max}, \frac{f_{\max}}{v_{\min}} \right\}, \text{ for } x \in [0, L]$$

121

$$122 \quad (6) \quad \min \left\{ \rho_0^{\min} v_{\min}, f_{\min} \frac{v_{\min}}{v_{\max}} \right\} \leq \text{Out}(t) \leq \max \left\{ \rho_0^{\max} v_{\max}, f_{\max} \frac{v_{\max}}{v_{\min}} \right\}.$$

Proof. Let $v^n \in \text{BV}([0, T], [v_{\min}, v_{\max}])$ be a sequence of piecewise constant functions converging to v in L^1 and satisfying $\text{TV}(v^n) \leq \text{TV}(v)$. For each v^n , by standard properties of Initial Boundary Value Problems for conservation laws [6, Theorem 2] and [16], there exists a unique BV entropy solution ρ^n to (3) with $\rho^n \in \text{Lip}([0, T], L^1)$. Notice that the left flow condition is equivalent to the boundary condition: $\rho_l(t) = \frac{\text{In}(t)}{v(t)}$. From [9, Lemma 2.3] and the Neumann boundary condition on the right, we get that $\rho^n(t, x) \leq \rho_{\text{cr}}$, thus by maximum principle it holds:

$$\rho^n(t, \cdot) \in \text{BV} \left(\mathbb{R}, \left[\min \left\{ \rho_0^{\min}, \frac{f_{\min}}{v_{\max}} \right\}, \max \left\{ \rho_0^{\max}, \frac{f_{\max}}{v_{\min}} \right\} \right] \right).$$

123 Let us now estimate the total variation of the solution ρ^n . Since it solves a scalar
124 conservation laws, the total variation does not increase in time due to dynamics on
125 $]0, L[$. Notice that changes in $v(\cdot)$ will not increase the total variation of ρ^n inside the
126 road (i.e. on $]0, L[$). The total variation of ρ^n increases only because of new waves

127 generated by changes in the inflow. Using the boundary condition $\rho_l(t) = \frac{\text{In}(t)}{v(t)}$,

128 we can estimate the total variation in space of ρ^n caused by time variation of In,
129 respectively time variation of v , by $\frac{\text{TV}(\text{In})}{v_{\min}}$, respectively $\frac{f_{\max} \text{TV}(v)}{v_{\min}^2}$. Finally we get:

$$130 \quad \sup_t \text{TV}(\rho^n(t, \cdot)) \leq \text{TV}(\rho^n(0, \cdot)) + \frac{\text{TV}(\text{In})}{v_{\min}} + \frac{f_{\max} \text{TV}(v)}{v_{\min}^2}.$$

131 By Helly's Theorem (see [7, Theorem 2.4]) there exists a subsequence converging in
 132 $L^1([0, T] \times [0, L])$ to a limit ρ^* . By Lipschitz continuity of the flux and dominated con-
 133 vergence we get that $f(\rho^n(t, x), v(t))$ converges in $L^1([0, T] \times [0, L])$ to $f(\rho^*(t, x), v(t))$.
 134 Passing to the limit in the weak formulation $\int_{\Omega} \rho^n \varphi_t + f(\rho^n, w) \varphi_x dt dx = 0$ (where
 135 $\Omega \subset\subset [0, T] \times [0, L]$ and $\varphi \in C_0^\infty$) we have that ρ^* is a weak entropic solution. We
 136 can pass to the limit also in the left boundary condition because this is equivalent
 137 to $\rho_l(t) = \frac{\text{In}(t)}{v(t)}$ and v is bounded from below. Finally ρ^* is a solution to (3). The
 138 standard Kruzhkov entropy condition [32] and [6, Theorem 2] ensure uniqueness of
 139 the solution. Since $\text{Out}(t) = \rho(t, L)v(t)$, we have that $\text{Out}(t)$ has bounded variation
 140 and satisfies (6). \square

141 To simplify notation, we further make the following assumptions:

Hypothesis 3. We assume Hypothesis 1 and the following:

$$\rho_0^{\min} \leq \frac{f_{\min}}{v_{\max}} \quad \text{and} \quad \rho_0^{\max} \geq \frac{f_{\max}}{v_{\min}}.$$

142 Given a control policy v , we can define a Link Entering Time (LET) function $\tau =$
 143 $\tau(t, v)$ representing the entering time for a car exiting the road at time t . The function
 144 depends on the control policy v , but for simplicity we will write $\tau(t)$ when the policy
 145 is clear from the context. Notice that LET is defined only for time greater than a
 146 given $t_0 > 0$, the exit time of the car entering the road at time $t = 0$, see Figure 2.
 Note that t_0 satisfies $\int_0^{t_0} v(s)ds = L$ and, for each $t \geq t_0$:

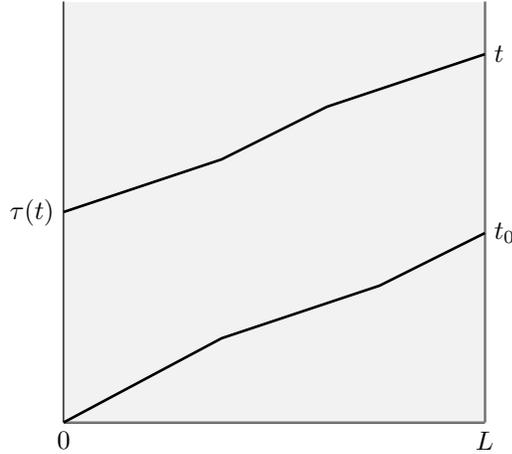


Fig. 2: Graphical representation of the LET function $\tau = \tau(t, v)$ defined in (7).

147

148 (7)
$$\int_{\tau(t)}^t v(s)ds = L.$$

Such $\tau(t)$ is unique, due to the hypothesis $v \geq v_{\min} > 0$. From the identity

$$\int_{\tau(t_1)}^{\tau(t_2)} v(s)ds = \int_{t_1}^{t_2} v(s)ds,$$

149 we get the following:

150 LEMMA 4. Given a control policy v , the function τ is a Lipschitz continuous func-
 151 tion, with Lipschitz constant $\frac{v_{\max}}{v_{\min}}$.

152 Recalling the definition of outflow of the solution given in (4), we get:

153 PROPOSITION 5. The input-output flow map of the Initial Boundary Value Prob-
 154 lem (briefly IBVP) (3) is given by

$$155 \quad (8) \quad \text{Out}(t) = \text{In}(\tau(t)) \frac{v(t)}{v(\tau(t))}.$$

156 *Proof.* Thanks to Proposition 2, the solution ρ to the IBVP (3) satisfies $\rho(t, x) \leq$
 157 ρ_{cr} , thus ρ solves a conservation law linear in ρ . Indeed the Newell-Daganzo flow
 158 is linear in the free flow zone. Therefore, no shock is produced inside the domain
 159 $[0, L]$ and characteristics are defined for all times. In particular the value of ρ is
 160 constant along characteristics. The characteristic exiting the domain at time t enters
 161 the domain from the boundary at time $\tau(t)$. Therefore we get $\rho(t, L) = \rho(0, \tau(t)) =$
 162 $\frac{\text{In}(\tau(t))}{v(\tau(t))}$. From (4) we get the desired conclusion. \square

163 *Remark 6.* This map is highly non-linear with respect to the control policy v
 164 due to the definition of τ . Hence, the classical techniques of linear control cannot be
 165 applied. Moreover, such formulation clearly shows how delays enter the input-output
 166 flow map. The effect of the control v at time t on the outflow depends on the choice
 167 of v on the time interval $[\tau(t), t]$, because of the presence of the LET map in formula
 168 (8).

169 **2.2. Optimal control problem.** We are now ready to define formally the prob-
 170 lem of outflow tracking.

171 *Problem 7.* Let Hypothesis 3 hold, fix $f^* \in \text{BV}([0, T], [f_{\min}, f_{\max}])$ and $K > 0$.
 172 Find the control policy $v \in \text{BV}([0, T], [v_{\min}, v_{\max}])$, with $\text{TV}(v) \leq K$, which minimizes
 173 the functional $J : \text{BV}([0, T], [v_{\min}, v_{\max}]) \rightarrow \mathbb{R}$ defined by

$$174 \quad (9) \quad J(v) := \int_0^T (\text{Out}(t) - f^*(t))^2 dt$$

175 where $\text{Out}(t)$ is given by (8).

176 We prove later on, in Proposition 15, that Problem 7 admits a solution.

177 *Remark 8.* We use the same positive extreme values f_{\min}, f_{\max} for both the
 178 inflow $\text{In}(\cdot)$ and the target outflow $f^*(\cdot)$ for simplicity of notation only.

179 *Remark 9.* In the simple case where all the parameters are constant in time, i.e.
 180 $\text{In}, \text{Out}, f^*, \rho_0$ do not depend on time, the problem has a a trivial solution which is
 181 $v = \frac{f^*}{\rho_0}$ realizing $J(v) = 0$.

182 **2.3. Cost variation as function of control policy variation.** In this section
 183 we estimate the variation of the cost $J(v)$ with respect to the perturbations of the
 184 control policy v . This computation will allow to prove continuous dependence of the
 185 solution from the control policy.

186 We first fix the notation for integrals of BV function with respect to Radon
 187 measures.

DEFINITION 10. Let ϕ be a BV-function and μ a Radon measure. We define

$$\int \phi(x^+) d\mu(x) := \int \phi(x) d\mu_c(x) + \sum_i m_i \phi(x_i^+),$$

188 where $\mu = \mu_c + \sum_i m_i \delta_{x_i}$ is the decomposition of μ into its continuous² and Dirac
189 parts.

190 We now compute the variation in the cost J produced by needle-like variation in
191 the control policy $v(\cdot)$, i.e. variation of the value of $v(\cdot)$ on small intervals of the type
192 $[t, t + \Delta t]$ in the same spirit as the needle variations of Pontryagin Maximum Principle
193 [8]. The analytical expression of variations will allow to implement a steepest-descent
194 type strategy to find the optimal speed limit.

195 DEFINITION 11. Consider $v \in \text{BV}([0, T], [v_{\min}, v_{\max}])$ and a time t such that
196 $\tau^{-1}(0) = t_0 \leq t < \tau(T)$ and $v(t^+) < v_{\max}$. Let $\Delta v > 0$, $\Delta t > 0$ be sufficiently
197 small such that $t + \Delta t \leq \tau(T)$ and $v(t^+) + \Delta v \leq v_{\max}$. We define a needle-like
198 variation $v'(\cdot)$ of v , corresponding to t , Δt and Δv by setting $v'(s) = v(s) + \Delta v$ if
199 $s \in [t, t + \Delta t]$ and $v'(s) = v(s)$ otherwise, see [Figure 3](#).

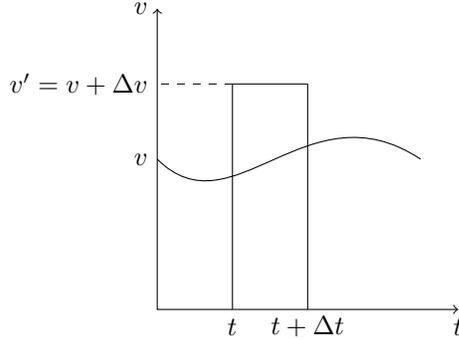


Fig. 3: Needle-like variation of the velocity v .

200 LEMMA 12. Consider $v \in \text{BV}([0, T], [v_{\min}, v_{\max}])$ and let v' be a needle-like vari-
201 ation of v . Then it holds:

$$\begin{aligned} & \lim_{\Delta v \rightarrow 0^+} \lim_{\Delta t \rightarrow 0^+} \frac{J(v') - J(v)}{\Delta v} = \\ & = 2\rho^2(t, L^-)v(t^+) - 2\rho(t, L^-)f^*(t^+) + \\ 202 \quad (10) \quad & - \int_{]0, L]} v((t + s(x))^+) d\rho_x^2(t) + 2 \int_{]0, L]} f^*((t + s(x))^+) d\rho_x(t) + \\ & + 2 \frac{In(t^-)}{v(t^+)} \left(f^*(t^+) - \frac{v(\tau^{-1}(t')^-)}{v(t^+)} In(t^-) \right), \end{aligned}$$

203 where integrals are defined according to [Definition 10](#). For $\Delta v < 0$, the limit for
204 $\Delta v \rightarrow 0^-$ satisfies the same formula with right limits replaced by left limits in the two
205 integral terms in [\(10\)](#).

²We recall that any Radon measure on \mathbb{R} can be decomposed into its continuous (AC+Cantor) and Dirac parts, as a consequence of the Lebesgue decomposition Theorem, see e.g. [\[17\]](#).

Remark 13. Notice that the condition $\tau^{-1}(0) = t_0 < t$ implies that the outflow $\text{Out}(s) \in [t, t + \Delta t]$, depends only on the inflow $\text{In}(\cdot)$ and not on the initial density ρ_0 . If such condition is not satisfied, the perturbation given by Δv has a comparable effect on $\text{Out}(\cdot)$, but it needs to be estimated in two parts: one with respect to $\text{In}([0, t + \Delta t])$ and one with respect to $\rho_0(0, L - l)$ with l being such that

$$\int_0^t v(s) ds = l.$$

206 The condition $t + \Delta t \leq \tau(T)$ means that the perturbation Δv has influence on the
 207 whole outflow $\text{Out}(s)$ in the interval $[t, \tau^{-1}(t + \Delta t)]$. If this is not satisfied, then
 208 the influence of the perturbation is stopped at $T < \tau^{-1}(t + \Delta t)$, hence the variation
 209 $\text{Out}(s)$ is smaller.

Proof. Let $\tau(t)$ be defined according to (7) and an outflow $\text{Out}(t)$ according to (8). For simplicity we assume that $v(\cdot)$ has a constant value $\hat{v} := v(t^+)$ on $[t, t + \Delta t]$, the general case holding because of properties of BV functions. We define $t' = t + \Delta t$ and s' to be the unique value satisfying

$$\int_0^{s'} v(t' + \sigma) d\sigma = L - (\hat{v} + \Delta v)\Delta t,$$

s'' to be the unique value satisfying

$$\int_0^{s''} v(t' + \sigma) d\sigma = L - \hat{v}\Delta t,$$

210 and $s''' = \tau^{-1}(t') - t'$, hence $\int_0^{s'''} v(t' + \sigma) d\sigma = L$. Notice that $s' < s'' < s'''$. We also
 211 define the function

$$212 \quad (11) \quad x(s) = L - \int_0^s v(t' + \sigma) d\sigma.$$

213 Remark that $x(s)$ is a decreasing function, with $x(0) = L$, $x(s') = (\hat{v} + \Delta v)\Delta t$,
 214 $x(s'') = \hat{v}\Delta t$ and $x(s''') = 0$. We denote with $\text{Out}'(s)$ the outflow, $\tau'(s)$ the LET (see
 215 (7)) and $\rho'(s, x)$ the density for the policy v' . Clearly, we have $\text{Out}'(s) = \text{Out}(s)$ for
 216 $s \in [0, t] \cup [\tau^{-1}(t'), T]$ and $\tau'(s) = \tau(s)$ for $s \in [t_0, t] \cup [\tau^{-1}(t'), T]$.

217 To compute the variation, we distinguish four time intervals: $I_1 = (t, t')$, $I_2 =$
 218 $(t', t' + s')$, $I_3 = (t' + s', t' + s'')$ and $I_4 = (t' + s'', \tau^{-1}(t'))$, see Figure 4. The
 219 variation of the cost in the first interval can be directly computed as function of the
 220 velocity variation, while in the other intervals the delays in the outflow formula (8) will
 221 render the computation more involved. We denote with J_1, \dots, J_4 the contributions
 222 to $\lim_{\Delta t \rightarrow 0^+} (J(v') - J(v))/\Delta v$ in the four intervals and estimate them separately.

223 **CASE 1 :** $I_1 = (t, t')$. Let $s \in [0, t' - t] = [0, \Delta t]$, then $\text{Out}(t + s) = \rho(t, L - s\hat{v})\hat{v}$
 224 and $\text{Out}'(t + s) = \rho(t, L - s(\hat{v} + \Delta v))(\hat{v} + \Delta v)$. We have:

(12)

$$225 \quad J_1 = \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\Delta t} \left(\text{Out}'(t+s) - f^*(t+s) \right)^2 ds - \int_0^{\Delta t} \left(\text{Out}(t+s) - f^*(t+s) \right)^2 ds \right] =$$

$$\lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\Delta t} \text{Out}'^2(t+s) - \text{Out}^2(t+s) - 2f^*(t+s) \left(\text{Out}'(t+s) - \text{Out}(t+s) \right) ds \right] =$$

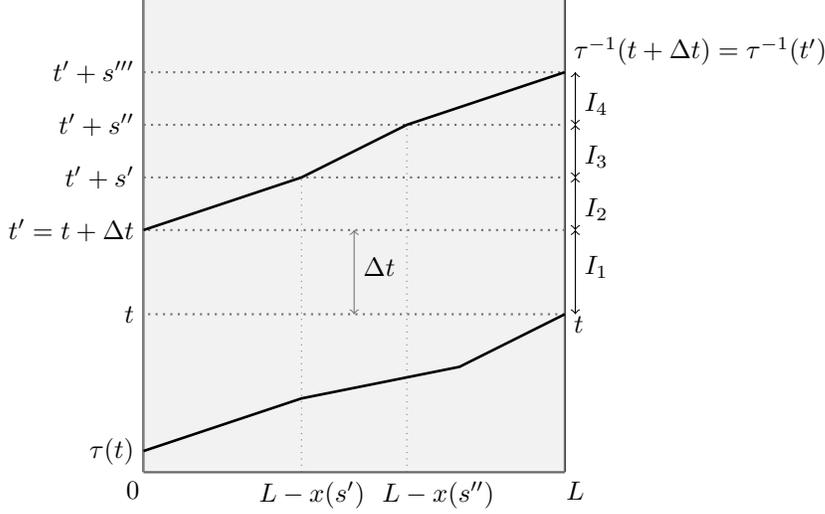


Fig. 4: Graphical representation for the notation used in [subsection 2.3](#)

Substituting the expressions for the outflows we get

$$\begin{aligned} & \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\Delta t} \rho^2(t, L - s(\hat{v} + \Delta v))(\hat{v} + \Delta v)^2 - \rho^2(t, L - s\hat{v})\hat{v}^2 ds + \right. \\ & \left. - \int_0^{\Delta t} 2f^*(t + s) \left(\rho(t, L - s(\hat{v} + \Delta v))(\hat{v} + \Delta v) - \rho(t, L - s\hat{v})\hat{v} \right) ds \right] = \end{aligned}$$

Dividing the first integral in two parts and making the change of variable $\sigma = s \frac{\hat{v} + \Delta v}{\hat{v}}$

$$\begin{aligned} & \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\Delta t(1 + \frac{\Delta v}{\hat{v}})} \rho^2(t, L - s\hat{v})(\hat{v} + \Delta v)^2 \frac{\hat{v}}{\hat{v} + \Delta v} d\sigma - \int_0^{\Delta t} \rho^2(t, L - s\hat{v})\hat{v}^2 ds + \right. \\ & \left. - \int_0^{\Delta t} 2f^*(t + s) \left(\hat{v}(\rho(t, L - s(\hat{v} + \Delta v)) - \rho(t, L - s\hat{v})) + \Delta v(\rho(t, L - s(\hat{v} + \Delta v))) \right) ds \right] = \end{aligned}$$

After simple algebraic manipulation we get:

$$\begin{aligned} & \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\Delta t(1 + \frac{\Delta v}{\hat{v}})} \rho^2(t, L - s\hat{v})\Delta v\hat{v} ds + \int_{\Delta t}^{\Delta t(1 + \frac{\Delta v}{\hat{v}})} \rho^2(t, L - s\hat{v})\hat{v}^2 ds + \right. \\ & \left. - \int_0^{\Delta t} 2f^*(t + s) \left(\hat{v}(\rho(t, L - s(\hat{v} + \Delta v)) - \rho(L - s\hat{v})) + \Delta v(\rho(t, L - s(\hat{v} + \Delta v))) \right) ds \right] = \\ & \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\Delta t} \rho^2(t, L - s\hat{v})\Delta v\hat{v} ds + \int_{\Delta t}^{\Delta t(1 + \frac{\Delta v}{\hat{v}})} \rho^2(t, L - s\hat{v})(\hat{v}^2 + \Delta v\hat{v}) ds \right. \\ & \left. - \int_0^{\Delta t} 2f^*(t + s) \left(\hat{v}(\rho(t, L - s(\hat{v} + \Delta v)) - \rho(t, L - s\hat{v})) + \Delta v(\rho(t, L - s(\hat{v} + \Delta v))) \right) ds \right] = \end{aligned}$$

Taking the limit as $\Delta t \rightarrow 0^+$, we get:

$$\begin{aligned} & \rho^2(t, L^-) \hat{v} \Delta v + \rho^2(t, L^-) \hat{\rho}(\hat{v} + \Delta v) \frac{\Delta v}{\hat{\rho}} + \\ & - 2f^*(t^+) [\hat{v}(\hat{\rho}(t, L^-) - \rho(t, L^-))] - 2f^*(t^+) \Delta v \rho(t, L^-) = \\ & \rho^2(t, L^-) \hat{v} \Delta v + \rho^2(t, L^-) (\hat{v} + \Delta v) \Delta v - 2f^*(t^+) \Delta v \rho(t, L^-), \end{aligned}$$

hence

$$J_1 = 2\rho^2(t, L^-) \hat{v} + \rho^2(t, L^-) \Delta v - 2f^*(t^+) \rho(t, L^-),$$

thus

$$\lim_{\Delta v \rightarrow 0^+} J_1 = 2\rho^2(t, L^-) v(t^+) - 2f^*(t^+) \rho(t, L^-).$$

226

227 **CASE 2** : $I_2 = (t', t' + s')$. If $s \in [0, s']$ then $\text{Out}(t' + s) = \rho(t', x(s))v(t' + s)$
 228 and $\text{Out}'(t' + s) = \rho((t', x(s) - \Delta v \Delta t))v(t' + s)$. After decomposing J_2 as done for J_1
 229 in (12) and plugging in the expression of the outflows, we have

$$\begin{aligned} 230 \quad (13) \quad J_2 &= \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{s'} v^2(t' + s) \left(\rho^2(t', x(s) - \Delta v \Delta t) - \rho^2(t', x(s)) \right) ds + \right. \\ & \left. - \int_0^{s'} 2f^*(t' + s) v(t' + s) \left(\rho(t', x(s) - \Delta v \Delta t) - \rho(t', x(s)) \right) ds \right]. \end{aligned}$$

Applying the change of variable $s \rightarrow x(s)$ (see (11)), it holds

$$\begin{aligned} J_2 &= \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_{0^+}^L v(t' + s(x)) \left(\rho^2(t', x - \Delta v \Delta t) - \rho^2(t', x) \right) dx + \right. \\ & \left. - \int_{0^+}^L 2f^*(t' + s(x)) \left(\rho(t', x - \Delta v \Delta t) - \rho(t', x) \right) dx \right]. \end{aligned}$$

Notice that this change of variable is justified by Lemma 22 of the Appendix. Using Lemma 23 of the Appendix, we get:

$$\begin{aligned} \lim_{\Delta v \rightarrow 0^+} J_2 &= - \int_{0^+}^L v((t' + s(x))^+) d\rho_x^2(t', x) \\ & + 2 \int_{0^+}^L f^*((t' + s(x))^+) d\rho_x(t', x). \end{aligned}$$

CASE 3 : $I_3 = (t' + s', t' + s'')$. If $s \in [s', s'']$ then $\text{Out}(t' + s) = \rho(t', x(s))v(t' + s)$
 and

$$\text{Out}'(t' + s) = v(t' + s) \frac{g(s)}{\hat{v} + \Delta v}, \quad g(s) = \ln \left(t' - \frac{x(s)}{\hat{v} + \Delta v} \right).$$

After decomposing J_3 as done for J_1 in (12) and plugging in the expression of the outflows, we get

$$\begin{aligned} \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} & \left[\int_{s'}^{s''} v^2(t' + s) \frac{g^2(s)}{(\hat{v} + \Delta v)^2} - \rho^2(t', x(s)) v^2(t' + s) + \right. \\ & \left. - 2f^*(t' + s) \left(v(t' + s) \frac{g(s)}{\hat{v} + \Delta v} - \rho(t', x(s)) v(t' + s) \right) \right] ds = \end{aligned}$$

231 Observe that $\lim_{\Delta t \rightarrow 0^+} s' = \lim_{\Delta t \rightarrow 0^+} s'' = \tau^{-1}(t')^- - t'$ and $\int_{s'}^{s''} v(t' + \sigma) d\sigma = \Delta v \Delta t$,
 232 then

$$233 \quad (14) \quad \Delta v J_3 = \frac{\Delta v}{v(\tau^{-1}(t')^-)} v^2(\tau^{-1}(t')^-) \text{In}^2(t'^-) \left[\left(\frac{1}{\hat{v} + \Delta v} \right)^2 - \left(\frac{1}{\hat{v}} \right)^2 \right] -$$

$$\frac{\Delta v}{v(\tau^{-1}(t')^-)} 2f^*(\tau^{-1}(t')^-) v(\tau^{-1}(t')^-) \text{In}(t'^-) \left(\frac{1}{\hat{v} + \Delta v} - \frac{1}{\hat{v}} \right),$$

thus

$$\lim_{\Delta v \rightarrow 0^+} J_3 = 0.$$

CASE 4 : $I_4 = (t' + s'', t' + s''')$. If $s \in [s'', s''']$ then we compute

$$\text{Out}(t' + s) = \frac{h(s)}{\hat{v}} v(t' + s) \quad h(s) = \text{In} \left(t' - \frac{x(s)}{\hat{v}} \right)$$

and

$$\text{Out}'(t' + s) = v(t' + s) \frac{g(s)}{\hat{v} + \Delta v} \quad g(s) = \text{In} \left(t' - \frac{x(s)}{\hat{v} + \Delta v} \right).$$

We decompose J_4 as done with J_1 in (12), plug in the expression of the outflows, and use the equality $\int_{s''}^{s'''} v(t' + \sigma) d\sigma = \hat{v}$. The, denoting $\tilde{v} = v(\tau^{-1}(t')^-)$, we have

$$\Delta v J_4 = \frac{\hat{v}}{\tilde{v}} \left[\tilde{v}^2 \text{In}^2(t'^-) \left[\left(\frac{1}{\hat{v} + \Delta v} \right)^2 - \left(\frac{1}{\hat{v}} \right)^2 \right] - 2f^*(\tau^{-1}(t')^-) \tilde{v} \text{In}(t'^-) \left[\frac{1}{\hat{v} + \Delta v} - \frac{1}{\hat{v}} \right] \right].$$

234 By passing to the limit, we get

$$235 \quad \lim_{\Delta v \rightarrow 0^+} J_4 = 2f^*(\tau^{-1}(t')^-) \frac{\text{In}(t'^-)}{\hat{v}} - 2 \frac{\tilde{v}}{\hat{v}^2} \text{In}(t'^-)^2.$$

236

□

237 **Lemma 12** and **Remark 13** allow us to prove the following:

238 **PROPOSITION 14.** *For every $K > 0$ and $C > 0$, the functional J is Lipschitz*
 239 *continuous on $\Omega := \{v \in \text{BV}([0, T], [v_{\min}, v_{\max}]) : \text{TV}(v) \leq K\}$ endowed with the*
 240 *norm $\|v\|_{L^1}$.*

241 *Proof.* Let $v, \tilde{v} \in \Omega$. Then $v - v'$ is in $\text{BV}([0, T], [v_{\min}, v_{\max}])$ and can be approxi-
 242 mated by piecewise constant functions. This means the $v - v'$ can be approximated in
 243 BV by needle-like variations as in **Lemma 12**. The right-hand side of (10) is uniformly
 244 bounded (since $v \in \Omega$ and $\rho \in \text{BV}$ with uniformly bounded variation). Therefore we
 245 conclude that $|J(v) - J(v')| \leq C \|v - v'\|_{L^1}$ for some $C > 0$. □

246 This allows to prove the following existence result.

247 **PROPOSITION 15.** *Problem 7 admits a solution.*

248 *Proof.* The space $\Omega = \{v \in \text{BV}([0, T], [v_{\min}, v_{\max}]) : \text{TV}(v) \leq K\} \cap \{v \in$
 249 $L^\infty([0, T], [v_{\min}, v_{\max}]) : \|v\|_\infty \leq C\}$ is compact in L^1 , see e.g. [4], and J is Lips-
 250 chitz continuous on Ω , thus there exists a minimizer of **Problem 7**. □

251 **3. Control policies.** In this section, we define three control policies for the
 252 time-dependent maximal speed v . The first, called the instantaneous policy (IP), is
 253 defined by minimizing the instantaneous contribution for the cost $J(v)$ at each time.
 254 We will show that such control policy does not provide a global minimizer, due to
 255 delays in the control effect on the cost for the **Problem 7**. In particular, due to the
 256 bound $v \in [v_{\min}, v_{\max}]$ the instantaneous minimization may induce a larger cost at
 257 subsequent times. Then, we introduce a second control policy, called random ex-
 258 ploration (RE) policy. Such policy uses a random path along a binary tree, which
 259 correspond the upper and lower bounds for v , i.e. $v = v_{\max}$ and $v = v_{\min}$.
 260 Finally, we introduce an effective strategy, which is one of the main results of the pa-
 261 per. More precisely, a third control policy is searched using a gradient descent method
 262 (GDM). The classical GDM are based on computing the gradient w.r.t. the control
 263 space variable, in finite of infinite dimensional setting, and then using steepest descent.
 264 We use a different approach and replace the gradient with cost variations computed
 265 with respect to needle-like variations in the control policy. This is in line with the
 266 spirit of Pontryagin Maximum Principle for optimal control problems. Therefore the
 267 key ingredient to define the third policy is the explicit computation of the gradient
 268 given in Section 2.

269 3.1. Instantaneous policy.

270 **DEFINITION 16.** Consider **Problem 7**. Define the *instantaneous policy* as fol-
 271 lows:

$$272 \quad (15) \quad v(t) := P_{[v_{\min}, v_{\max}]} \left(f^*(t^-) \cdot \frac{v(\tau(t)^-)}{In(\tau(t)^-)} \right),$$

273 where the projection $P_{[v_{\min}, v_{\max}]} : \mathbb{R} \rightarrow \mathbb{R}$ is the function

$$274 \quad (16) \quad P_{[a,b]}(x) := \begin{cases} a & \text{for } x < a, \\ x & \text{for } x \in [a, b], \\ b & \text{for } x > b. \end{cases}$$

275 Notice that this would be the optimal choice if f^* and In would be constant, see
 276 **Remark 9**. The instantaneous policy can also be written directly in terms of the
 277 input-output map defined in **Proposition 5**. As we will show later, the instantaneous
 278 policy is not optimal in general, i.e., it does not provide an optimal solution v for
 279 **Problem 7**. Clearly, it provides the solution in the case of v_{\min} sufficiently small
 280 and v_{\max} sufficiently big so that the projection operator reduces to the identity, i.e.,
 281 $v(t) = P_{[v_{\min}, v_{\max}]} \left(\frac{f^*(t^-)}{\rho(L^-)} \right) = \frac{f^*(t^-)}{\rho(L^-)}$ for all times. Indeed, in this case the output
 282 $Out(t)$ coincides with $f^*(t)$, hence the cost $J(v)$ is zero.

283 **3.2. Random exploration policy.** The random exploration policy is defined
 284 as follows:

285 **DEFINITION 17.** Given the extreme values for the maximal speed, v_{\max} and v_{\min} ,
 286 and a time step Δt , the *random exploration policy* draws sequences of veloci-
 287 ties from the set $\{v_{\max}, v_{\min}\}$ corresponding to control policy values on the intervals
 288 $[i\Delta t, (i+1)\Delta t]$.

289 Notice that maximal speeds according to this algorithm can be generated for all
 290 times, independently of the corresponding solution, in contrast to the instantaneous
 291 policy which is based on the maximal speed at previous times. We will use numerical

292 optimization to choose the best among the generated random policies, showing in
 293 particular that the instantaneous policy is not optimal in general.

294 **3.3. Gradient method.** We use needle-like variations and the analytical ex-
 295 pression in (10) to numerically compute one-sided variations of the cost. We consider
 296 such variations as estimates of the gradient of the cost in L^1 . More precisely, we give
 297 the following definition.

298 **DEFINITION 18.** *The **gradient policy** is the result of a first-order optimization*
 299 *algorithm to find a local minimum to **Problem 7** using the Gradient Descent Method*
 300 *and the expression in (10), stopping at a fixed precision tolerance.*

301 We will show that the gradient method gives very good results compared to the other
 302 policies taking into account the computational complexity.

303 **4. Numerical simulations.** In this section we show the numerical results ob-
 304 tained by implementing the policies described in section 3. The numerical algorithm
 305 for all the approaches is composed of two steps:

- 306 1. Numerical scheme for the conservation law (1). The density values are com-
 307 puted using the classical Godunov scheme, introduced in [23].
- 308 2. Numerical solution for the optimal control problem, i.e., computation of the
 309 maximal speed using the instantaneous control, random exploration policy
 310 and gradient descent.

311 Let Δx and Δt be the fixed space and time steps, and set $x_{j+\frac{1}{2}} = j\Delta x$, the cell
 312 interfaces such that the computational cell is given by $C_j = [x_{j-\frac{1}{2}}, x_{j+\frac{1}{2}}]$. The center
 313 of the cell is denoted by $x_j = (j - \frac{1}{2})\Delta x$ for $j \in \mathbb{Z}$ at each time step $t^n = n\Delta t$ for
 314 $n \in \mathbb{N}$. We fix \mathcal{J} the number of space points and T the finite time horizon. We now
 315 describe in detail the two steps.

316 **4.1. Godunov scheme for hyperbolic PDEs.** The Godunov scheme is a first
 317 order scheme, based on exact solution to Riemann problems. Given $\rho(t, x)$, the cell
 318 average of ρ in the cell C_j at time t^n is defined as

$$319 \quad (17) \quad \rho_j = \frac{1}{\Delta x} \int_{x_{j-\frac{1}{2}}}^{x_{j+\frac{1}{2}}} \rho(t^n, x) dx.$$

320 Then, the Godunov scheme consists of two main steps:

- 321 1. Solve the Riemann problem at each cell interface $x_{j+\frac{1}{2}}$ with initial data
 322 (ρ_j, ρ_{j+1}) .
- 323 2. Compute the cell averages at time t^{n+1} in each computational cell and obtain
 324 ρ_j .

325 *Remark 19.* Waves in two neighboring cells do not intersect before Δt if the
 326 following CFL (Courant-Friedrichs-Lewy) condition holds:

$$327 \quad (18) \quad \Delta t \max_{j \in \mathbb{Z}} |f'(\rho_j)| \leq \frac{1}{2} \min_{j \in \mathbb{Z}} \Delta x.$$

328 The Godunov scheme can be expressed in conservative form as:

$$329 \quad (19) \quad \rho_j^{n+1} = \rho_j^n - \frac{\Delta t}{\Delta x} \left(F(\rho_j^n, \rho_{j+1}^n, v^n) - F(\rho_{j-1}^n, \rho_j^n, v^n) \right)$$

330 where v^n is the maximal speed at time t^n . Additionally, $F(\rho_j^n, \rho_{j+1}^n, v^n)$ is the Go-
 331 dunov numerical flux that in general has the following expression:

$$332 \quad (20) \quad F(\rho_j^n, \rho_{j+1}^n, v^n) = \begin{cases} \min_{z \in [\rho_j^n, \rho_{j+1}^n]} f(z, v^n) & \text{if } \rho_j^n \leq \rho_{j+1}^n, \\ \max_{z \in [\rho_{j+1}^n, \rho_j^n]} f(z, v^n) & \text{if } \rho_{j+1}^n \leq \rho_j^n. \end{cases}$$

333 For clarity, we included as an argument for the Godunov scheme the maximal velocity
 334 so that the dependence of the scheme on the optimal control could be explicit.

335 **4.2. Velocity policies.** The next step in the algorithm consists of computing a
 336 control policy v that can be used in the Godunov scheme with the different approaches
 337 introduced in [section 3](#). In particular, for the instantaneous policy approach we
 338 compute the velocity at each time step using the instantaneous outgoing flux. Instead,
 339 using the other two approaches, the RE and the GDM, we compute beforehand the
 340 value of the velocity at each time step and then use it to solve the conservation law
 341 with the Godunov scheme.

342 **4.2.1. Instantaneous policy.** We follow the control policy described in [sub-](#)
 343 [section 3.1](#) for the instantaneous control. At each time step, the velocity v^{n+1} is
 344 computed using the following formula:

$$345 \quad (21) \quad v^{n+1} = v(t^{n+1}) = P_{[v_{\min}, v_{\max}]} \left(\frac{f^*(t^n)}{\rho_{\mathcal{J}}^n} \right).$$

346 **4.2.2. Random exploration policy.** To compute for each time step the value
 347 of the velocity, we use a randomized path on a binary tree, see [Figure 5](#). With such
 348 technique, we obtain several sequences of possible velocities. For each sequence the
 349 velocities are used to compute the fluxes for the numerical simulations. We then
 choose the sequence that minimizes the cost.

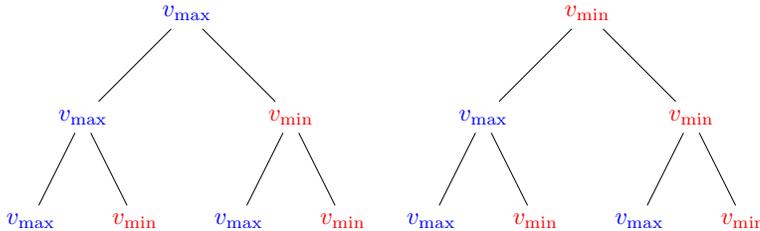


Fig. 5: The first branches of the binary tree used for sampling the velocity.

350

351 *Remark 20.* Notice that the control policy RE may have a very large total varia-
 352 tion, thus it might not respect the bounds on TV given in [Problem 7](#). Therefore the
 353 found control policies may not be allowed as a solution of this problem. However, we
 354 implement this technique for comparison with the results and performances obtained
 355 by the GDM.

356 **4.2.3. Gradient descent method.** We first numerically compute one-sided
 357 variations of the cost using [\(10\)](#). Then, we use the classical gradient descent method
 358 [\[3\]](#) to find the optimal control strategy and to compute the optimal velocity that fits
 359 the given outflow profile, as described in [Algorithm 1](#).

Algorithm 1 Algorithm for the gradient descent and computation of the optimal control

Input data: Initial and boundary condition for the PDE and initial velocity
 Fix a step tolerance ϵ and find a suitable step size α
while $|J_{i+1} - J_i| \leq \epsilon$ **do**
 Compute numerically cost variations ∇J_i
 Update the optimal velocity $v_{i+1} = v_i - \alpha \nabla J_i$
 Compute the new densities using Godunov scheme
 Compute the new value of the cost functional
end while

360 *Remark 21.* One might be interested in solving the optimal control problem by
 361 applying an adjoint method, as it is classical for finite-dimensional control systems.
 362 Unluckily, for the problem described here by a Partial Differential Equation, adjoint
 363 equations are still unknown.

364 One might then discretize the dynamics, then solve the finite-dimensional problem
 365 with an adjoint equation, and finally pass to the limit. While we showed in [18] that
 366 one can find minimizers by discretization for some specific mean-field equations, there
 367 is no evidence that such technique could work for the problem described here. In
 368 particular, there is no evidence that the sequence of minimizers of the discretized
 369 problem converge to the minimizer of the original one.

370 **4.3. Simulations.** We set the following parameters: $L = 1$, $\mathcal{J} = 100$, $T =$
 371 15.0 , $\rho_{cr} = 0.5$, $\rho_{max} = 1$, $v_{min} = 0.5$, $v_{max} = 1.0$. Moreover, the input flux at the
 372 boundary of the domain is given by $In = \min(0.3 + 0.3 \sin(2\pi t^n), 0.5)$. We choose two
 373 different target fluxes $f^* = 0.3$ and $f^* = |(0.4 \sin(t\pi - 0.3))|$. The initial condition is
 374 a constant density $\rho(0, x) = 0.4$. We use oscillating inflows to represent variations in
 375 typical inflow of urban or highway networks at the 24h time scale.

376 **4.3.1. Test I: Constant Outflow.** In Figure 6, we show the time-varying speed
 377 obtained by using the instantaneous policy (left) and by using the gradient descent
 378 method (right). In each case, we notice that due to the oscillating input signal the
 379 control policy is also oscillating. We are aware, however, that from a practical point
 380 of view, the solution where the speed changes at each time step might be unfeasible.
 381 Nonetheless, these policies can be seen as periodic change of maximal speed for dif-
 382 ferent time frames during the day when the time horizon is scaled to the day length.

In Table 1, we see the different results obtained for the cost functional computed

Method	Cost Functional	Average Speed
Fixed speed $v = v_{max} = 1.0$	873.0786	1.0
Fixed speed $v = v_{min} = 0.5$	785.2736	0.5
Instantaneous policy	850.3704	0.7867
Minimum of random exploration policy	723.6733	0.7597
Gradient method	735.0565	0.5241

Table 1: Value of the cost functional and the average velocity for the different policies.

383
 384 at the final time for the different policies. For comparison, we also put the results of
 385 the simulations with a constant speed equal to the minimum and maximal velocity
 386 bounds. The instantaneous policy is outperformed by the random exploration policy
 387 and by the gradient method. For the random exploration policy, in the table we put

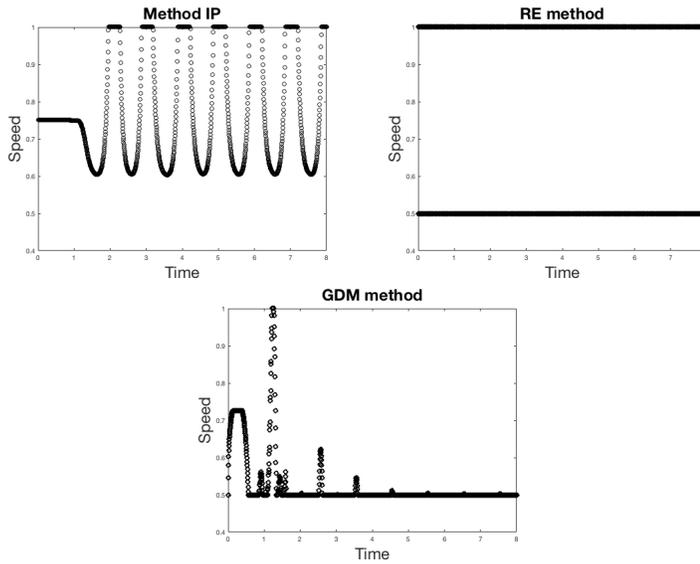


Fig. 6: Speed obtained by using the instantaneous policy (left) and the gradient descent method (right) for a target flux $f^* = 0.3$.

388 the minimal value of the cost functional computed by the algorithm. In [Figure 7](#)
 389 we can see the distribution of the different values of the cost functional over 1000
 390 simulations. Moreover, in [Figure 8](#), we can see the differences between the actual
 outflow obtained and the target one for all methods. We also compared the CPU

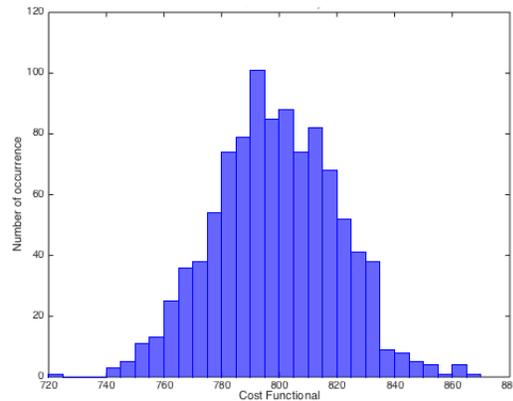


Fig. 7: Histogram of the distribution of the value of the cost functional for the random exploration policy. We run 1000 different simulations.

391 time for the different simulations approaches (see [Table 2](#)). As expected, the random
 392 exploration policy is the least performing while the instantaneous policy is the fastest
 393 one. In addition, we computed the $TV(v)$ for each one of the policies obtaining the
 394

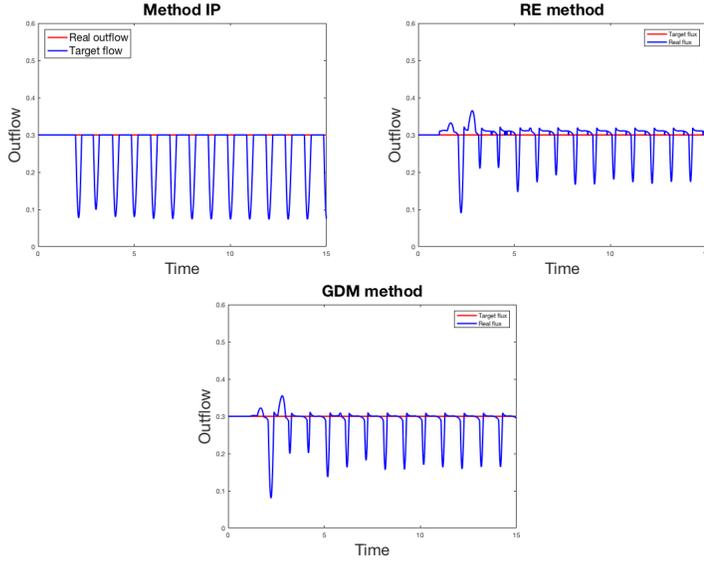


Fig. 8: Difference between the real outgoing flux and the target constant flux, computed with the instantaneous policy (top, left), the gradient method (top, right) and the random exploration policy (bottom).

395 following results:

- 396 • IP: $TV(v) = 12.6904$
 397 • RE: $TV(v) = 753.5$
 398 • GDM: $TV(v) = 70.81333$.

Method	CPU Time (s)
Instantaneous policy	32.756
Random exploration policy	7577.390
Gradient method	1034.567

Table 2: CPU Time for the simulations performed with the different approaches.

399 **4.3.2. Test II: Sinusoidal Outflow.** In Figure 9, we show the optimal velocity
 400 obtained by using the instantaneous policy and by using the gradient descent method
 401 with a sinusoidal outflow. We show in Figure 10 the histogram of the cost functional
 402 obtained for the random exploration policy and in Figure 11 we compare the real
 403 outgoing flux with the target one. In Table 3, different results obtained for the cost
 404 functional computed at final time for the different policies are shown. Also in this
 405 case the instantaneous policy is outperformed by the other two. The CPU times give
 406 results similar to the previous test.

407 **5. Conclusions.** In this work, we studied an optimal control problem for traffic
 408 regulation on a single road via variable speed limit. The traffic flow is described
 409 by the LWR model equipped with the Newell-Daganzo flux function. The optimal
 410 control problem consists in tracking a given target outflow in free flow conditions. We

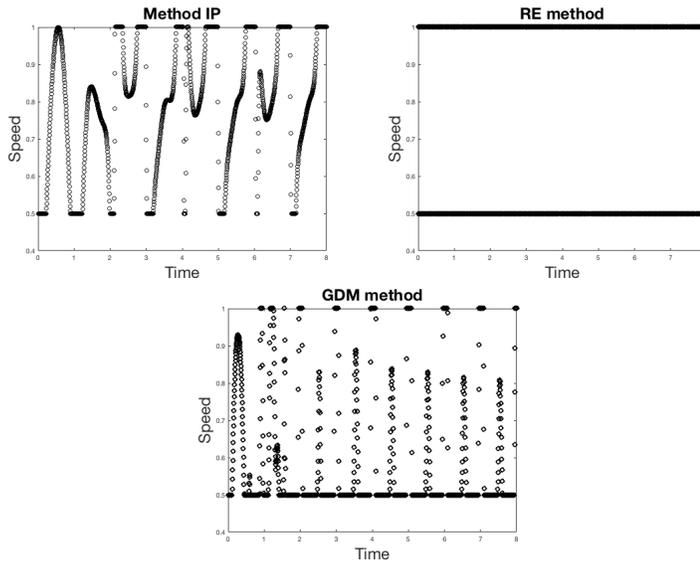


Fig. 9: Speed obtained by using the instantaneous policy (left) and the gradient descent method (right) for a sinusoidal target flux.

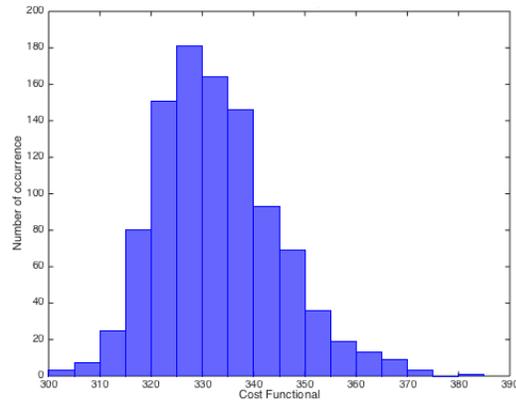


Fig. 10: Histogram of the distribution of the value of the cost functional for the random exploration policy. We run 1000 different simulations.

411 proved the existence of a solution for the optimal control problem and provided explicit
 412 analytical formulas for cost variations corresponding to needle-like variations of the
 413 control policy. We proposed three different control policies design: instantaneous
 414 depending only on the instantaneous downstream density, random simulations and
 415 gradient descent. The latter, based on numerical simulations for the cost variation,
 416 represents the best compromise between performance, computational cost and total
 417 variation of the control policy.

418 Future works will include the study of this problem in case of congestion and the

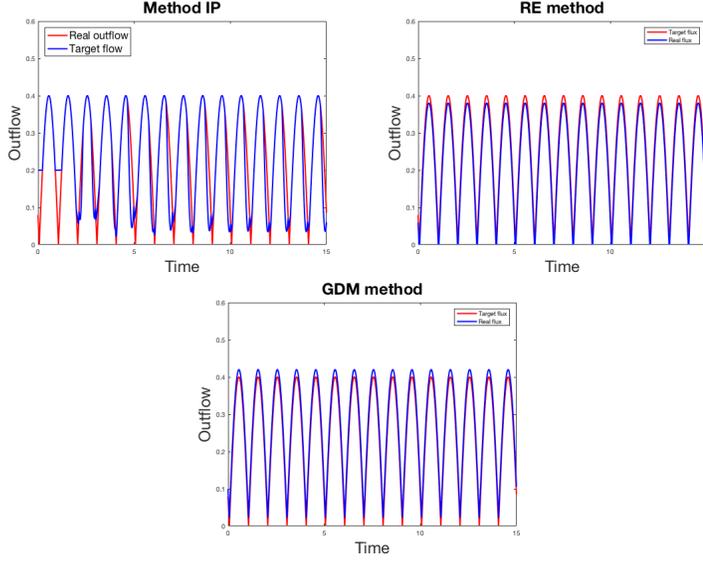


Fig. 11: Difference between the real outgoing flux and the target sinusoidal flux, computed with the instantaneous policy (top, left), the gradient method (top, right) and the random exploration policy (bottom).

Method	Cost Functional	Average speed
Fixed speed $v = v_{\max} = 1.0$	$1.3979e + 03$	1.0
Fixed speed $v = v_{\min} = 0.5$	843.3395	0.5
Instantaneous policy	458.8874	0.7917
Minimum of random exploration policy	303.8327	0.7512
Gradient method	307.6889	0.6001

Table 3: Value of the cost functional for the different policies.

419 extension to second order traffic flow models.

420 **Appendix.**

421 LEMMA 22. Let $\beta, T > 0$, and $\varphi \in \text{BV}([0, T], \mathbb{R}^+)$ be given. Define $L := \int_0^T \varphi(\sigma) d\sigma$

422 and the function $x : [0, T] \rightarrow [0, L]$ by $x(s) := L - \int_0^s \varphi(\sigma) d\sigma$, that is invertible.

423 Define $\alpha \geq \beta$ and the function $\bar{t} : (0, \frac{L}{\alpha}] \rightarrow [0, L]$ such that $\bar{t}(\Delta t)$ is the unique

424 solution of $\int_0^{\bar{t}(\Delta t)} \varphi(\sigma) d\sigma = L - \alpha \Delta t$.

425 It then holds

$$\begin{aligned}
 & \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\bar{t}(\Delta t)} \varphi^2(s) \left(\psi(x(s) - \beta \Delta t) - \psi(x(s)) \right) ds \right] = \\
 & \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_{0^+}^L \varphi(s(x)) \left(\psi(x - \beta \Delta t) - \psi(x) \right) dx \right].
 \end{aligned}$$

426 (22)

427 *Proof.* The change of variable $s \rightarrow x(s)$ inside the integral gives

$$428 \quad (23) \quad \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \left[\int_0^{\bar{i}(\Delta t)} \varphi^2(s) (\psi(x(s) - \beta \Delta t) - \psi(x(s))) ds = \right. \\ \left. \lim_{\Delta t \rightarrow 0^+} -\frac{1}{\Delta t} \int_L^{\alpha \Delta t} \varphi(s(x)) (\psi(x - \beta \Delta t) - \psi(x)) dx = \right.$$

429

$$430 \quad (24) \quad \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_{0^+}^L \varphi(s(x)) (\psi(x - \beta \Delta t) - \psi(x)) dx - \\ \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_{0^+}^{\alpha \Delta t} \varphi(s(x)) (\psi(x(s) - \beta \Delta t) - \psi(x(s))) dx,$$

431 where $s(x)$ is uniquely determined by the invertibility of the function $x(s)$. Observe
432 that we need to specify the 0^+ extremum in the integral, since the limit will provide
433 Dirac terms inside the integral. We want now prove that the last addendum tends
434 to zero. Denote by ψ_x the distributional derivative of ψ , which is a measure, and
435 decompose it as in the continuous (AC+ Cantor) and Dirac part. By integrating ψ_x ,
436 we write $\psi = \tilde{\psi} + \sum_i m_i \chi_{[x_i, L]}$, with $\tilde{\psi}$ a continuous function, $m_i > 0$, $\sum_i m_i < +\infty$
437 and $x_i \in [0, L]$. Hence, by the mean value theorem applied to $\tilde{\psi}$, we have

$$438 \quad (25) \quad \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_{0^+}^{\alpha \Delta t} \varphi(s(x)) \left| \tilde{\psi}(x(s) - \beta \Delta t) - \tilde{\psi}(x(s)) \right| dx \leq \\ \lim_{\Delta t \rightarrow 0^+} \|\varphi\|_\infty \alpha \left| \tilde{\psi}(\tilde{x} - \beta \Delta t) - \tilde{\psi}(\tilde{x}) \right| = 0,$$

where $\tilde{x} \in (0, \alpha \Delta t)$ is a point (depending on Δt) and the limit is zero as a consequence
of the continuity of $\tilde{\psi}$. The remaining term in (24) is then

$$\lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_{0^+}^{\alpha \Delta t} \varphi(s(x)) \sum_{x_i \in (0, \alpha \Delta t]} m_i (\chi_{[x_i - \beta \Delta t, L]} - \chi_{[x_i, L]}) dx = \\ \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \sum_{x_i \in (0, \alpha \Delta t]} \varphi(s(x_i^-)) m_i \beta \Delta t \leq \lim_{\Delta t \rightarrow 0^+} \beta \|\varphi\|_\infty \sum_{x_i \in (0, \alpha \Delta t]} m_i.$$

439 Since ψ is in BV the quantity $\sum_{x_i \in (0, \alpha \Delta t]} m_i$ tends to zero as Δt tends to zero, thus
440 we conclude. \square

441 **LEMMA 23.** *Let $\varphi, \psi \in \text{BV}([a - \varepsilon, b + \varepsilon], \mathbb{R})$, then*

$$442 \quad (26) \quad \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_a^b \varphi(x) (\psi(x - C \Delta t) - \psi(x)) dx = -C \int_a^b \varphi(x^+) d\psi_x(x),$$

443 where the integral in the right hand side is defined in [Definition 10](#).

Proof. We decompose the measure ψ_x as $\psi_x = \ell d\lambda + \sum_i m_i \delta_{x_i}$, where λ is the
Lebesgue measure, ℓ the Radon-Nikodym derivative of ψ_x w.r.t. λ , $m_i > 0$ and
 $\sum_i m_i < +\infty$. We approximate ψ by piecewise continuous functions ψ^n defined as the
integrals of $\psi_x^n = \ell d\lambda + \sum_{i \leq N(n)} m_i \delta_{x_i}$, where $N(n)$ is chosen such that $\sum_{i > N(n)} m_i <$
 $\frac{1}{n}$.

Define $I(n) = \cup_{i=1}^{N(n)} [x_i, x_i + C \Delta t]$ and by I_c its complement in $[a, b]$. Notice that for

$x \in [x_i, x_i + C\Delta t]$ we have $\psi^n(x - C\Delta t) - \psi^n(x) = -m_i - \int_{x-C\Delta t}^x \ell \, d\lambda$ while on I_c there are no jumps so $\psi^n(x - C\Delta t) - \psi^n(x) = -\int_{x-C\Delta t}^x \ell \, d\lambda$. We thus can write:

$$\begin{aligned}
& \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_a^b \varphi(x) \left(\psi^n(x - C\Delta t) - \psi^n(x) \right) dx = \\
& \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \sum_{i=1}^{N(n)} \int_{x_i}^{x_i + C\Delta t} \varphi(x) \left(\psi^n(x - C\Delta t) - \psi^n(x) \right) dx + \\
& \quad + \int_{I_c} \varphi(x) \left(\psi^n(x - C\Delta t) - \psi^n(x) \right) dx = \\
(27) \quad & = \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \sum_{i=1}^{N(n)} (-m_i) \int_{x_i}^{x_i + C\Delta t} \varphi(x) dx - \frac{1}{\Delta t} \int_a^b \varphi(x) \int_{x-C\Delta t}^x \ell \, d\lambda dx.
\end{aligned}$$

Since φ is in BV we can write:

$$\begin{aligned}
& \lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_a^b \varphi(x) \left(\psi^n(x - C\Delta t) - \psi^n(x) \right) dx = - \sum_{i=1}^{N(n)} m_i \varphi(x_i^+) - \int_a^b \varphi(x) d(\ell\lambda) \\
& = - \int_a^b \varphi(x^+) d \left(\sum_{i=1}^{N(n)} m_i \delta_{x_i} + \ell\lambda \right) = - \int_a^b \varphi(x^+) d\psi_x^n
\end{aligned}$$

Now, the following estimates hold:

$$\begin{aligned}
& \left| \frac{1}{\Delta t} \int_a^b \varphi(x) \left(\psi^n(x - C\Delta t) - \psi^n(x) \right) dx - \frac{1}{\Delta t} \int_a^b \varphi(x) \left(\psi(x - C\Delta t) - \psi(x) \right) dx \right| \\
& = \left| \frac{1}{\Delta t} \int_a^b \varphi \left(\psi^n(x - C\Delta t) - \psi(x - C\Delta t) \right) - \left(\psi^n(x) - \psi(x) \right) dx \right|
\end{aligned}$$

We can write $\psi^n(x - C\Delta t) = \psi(a) + \int_a^{x-C\Delta t} d\psi_x^n$ and $\psi(x - C\Delta t) = \psi(a) + \int_a^{x-C\Delta t} d\psi_x$, which gives us

$$= \left| \frac{1}{\Delta t} \int_a^b \varphi(x) \left(\int_a^{x-C\Delta t} dr_n - \int_a^x dr_n \right) dx \right|,$$

where $r_n = \psi - \psi^n$. Taking the limit for $\Delta t \rightarrow 0^+$:

$$\begin{aligned}
& \left| \frac{1}{\Delta t} \int_a^b \varphi(x) \left(\psi^n(x - C\Delta t) - \psi^n(x) \right) dx - \frac{1}{\Delta t} \int_a^b \varphi(x) \left(\psi(x - C\Delta t) - \psi(x) \right) dx \right| \\
& \leq \left| \frac{1}{\Delta t} \int_a^b \varphi(x) \left(- \int_{x-C\Delta t}^x dr_n \right) dx \right| \leq \\
& \|\varphi\|_\infty \frac{1}{\Delta t} \left| \int_a^b \int_{x-C\Delta t}^x dr_n dx \right| \leq \|\varphi\|_\infty \frac{1}{n}.
\end{aligned}$$

The last inequality holds true because $\int_{x-C\Delta t}^x dr_n = \sum_i m_i \int_{x-C\Delta t}^x d\delta_{x_i} = \sum_i m_i \chi_{[x_i, x_i+C\Delta t]}$. Thus we get:

$$\lim_{\Delta t \rightarrow 0^+} \frac{1}{\Delta t} \int_a^b \varphi(\psi(x - C\Delta t) - \psi(x)) dx = \mathcal{O}\left(\frac{1}{n}\right) + \int_a^b \varphi(x^+) d\psi_x^n$$

. Let us now estimate the quantity

$$\left| \int_a^b \varphi(x^+) d\psi_x^n - \int_a^b \varphi(x^+) d\psi_x \right|.$$

Recalling that $\psi^n(x - C\Delta t) = \psi(a) + \int_a^{x-C\Delta t} d\psi_x^n$ and $\psi(x - C\Delta t) = \psi(a) + \int_a^{x-C\Delta t} d\psi_x$ we get

$$\left| \int_a^b \varphi(x^+) d\left(\sum_{i \geq N(n)} m_i \delta_{x_i}\right) \right| \leq \|\varphi\|_\infty \frac{1}{n}.$$

448 Passing to the limit in n we conclude. □

449

450

REFERENCES

- 451 [1] A. ALESSANDRI, A. DI FEBBRARO, A. FERRARA, AND E. PUNTA, *Optimal control of freeways via*
 452 *speed signalling and ramp metering*, Control Engineering Practice, 6 (1998), pp. 771–780.
 453 [2] A. ALESSANDRI, A. DI FEBBRARO, A. FERRARA, AND E. PUNTA, *Nonlinear optimization for*
 454 *freeway control using variable-speed signaling*, IEEE Transactions on vehicular technology,
 455 48 (1999), pp. 2042–2052.
 456 [3] G. ALLAIRE, *Numerical analysis and optimization*, Oxford university press, 2007.
 457 [4] L. AMBROSIO, N. FUSCO, AND D. PALLARA, *Functions of bounded variation and free disconti-*
 458 *nuity problems*, vol. 254, Clarendon Press Oxford, 2000.
 459 [5] M. K. BANDA AND M. HERTY, *Adjoint IMEX-based schemes for control problems governed*
 460 *by hyperbolic conservation laws*, Computational optimization and applications, 51 (2010),
 461 pp. 909–930.
 462 [6] C. BARDOS, A. Y. LE ROUX, AND J.-C. NÉDÉLEC, *First order quasilinear equations with boud-*
 463 *nary conditions*, Comm. Partial Differential Equations, 4 (1979), pp. 1017–1034.
 464 [7] A. BRESSAN, *Hyperbolic systems of conservation laws: the one-dimensional Cauchy problem*,
 465 Oxford university press, 2000.
 466 [8] A. BRESSAN AND B. PICCOLI, *Introduction to the mathematical theory of control*, American
 467 Institute of Mathematical Sciences (AIMS), Springfield, MO, 2007.
 468 [9] G. BRETTI, R. NATALINI, AND B. PICCOLI, *Fast algorithms for a traffic flow model on networks*,
 469 Discrete and Continuous Dynamical Systems - Series B, 6 (2006), pp. 427–448.
 470 [10] C. CANUDAS DE WIT, *Best-effort highway traffic congestion control via variable speed limits*, in
 471 50th IEEE Conference on Decision and Control and European Control Conference, 2011.
 472 [11] R. C. CARLSON, I. PAPAMICHAIL, M. PAPAGEORGIOU, AND A. MESSMER, *Optimal motorway*
 473 *traffic flow control involving variable speed limits and ramp metering*, Transportation Sci-
 474 ence, 44 (2010), pp. 238–253.
 475 [12] R. M. COLOMBO AND P. GOATIN, *A well posed conservation law with a variable unilateral*
 476 *constraint*, J. Differential Equations, 234 (2007), pp. 654–675.
 477 [13] A. CSIKÓS, I. VARGA, AND K. HANGOS, *Freeway shockwave control using ramp metering and*
 478 *variable speed limits*, in 21st Mediterranean Conference on Control & Automation, 2013,
 479 pp. 1569–1574.
 480 [14] C. DAGANZO, *The cell transmission model: A dynamic representation of highway traffic con-*
 481 *sistent with the hydrodynamic theory*, Transportation Research Part B, 28 (1994), pp. 269–
 482 287.
 483 [15] J. R. DOMÍNGUEZ FREJO AND E. F. CAMACHO, *Global versus local MPC algorithms in free-*
 484 *way traffic control with ramp metering and variable speed limits*, IEEE Transactions on
 485 intelligent transportation systems, 13 (2012), pp. 1556–1565.

- 486 [16] C. DONADELLO AND A. MARSON, *Stability of front tracking solutions to the initial and bound-*
 487 *ary value problem for systems of conservation laws*, *Nonlinear Differential Equations and*
 488 *Applications NoDEA*, 14 (2007), pp. 569–592.
- 489 [17] L. C. EVANS AND R. F. GARIEPY, *Measure Theory and Fine Properties of Functions*, CRC,
 490 1991.
- 491 [18] M. FORNASIER, B. PICCOLI, AND F. ROSSI, *Mean-field sparse optimal control*, *Philosophical*
 492 *Transactions of the Royal Society of London A: Mathematical, Physical and Engineering*
 493 *Sciences*, 372 (2014).
- 494 [19] A. FÜGENSCHUH, M. HERTY, A. KLAR, AND A. MARTIN, *Combinatorial and continuous model*
 495 *for the optimization of traffic flows on networks*, *SIAM Journal on optimization*, 16 (2006),
 496 pp. 1155–1176.
- 497 [20] M. GARAVELLO AND B. PICCOLI, *Traffic flow on networks*, vol. 1 of *AIMS Series on Applied*
 498 *Mathematics*, American Institute of Mathematical Sciences (AIMS), Springfield, MO, 2006.
 499 Conservation laws models.
- 500 [21] M. GILES AND S. ULBRICH, *Convergence of linearized and adjoint approximations for discon-*
 501 *tinuous solutions of conservation laws. Part 2: Adjoint approximations and extensions*,
 502 *SIAM Journal on Numerical Analysis*, 48 (2010), pp. 905–921.
- 503 [22] P. GOATIN, S. GÖTTLICH, AND O. KOLB, *Speed limit and ramp meter control for traffic flow*
 504 *networks*, *Engineering Optimization*, 48 (2016), pp. 1121–1144.
- 505 [23] S. K. GODUNOV, *A finite difference method for the numerical computation of discontinuous*
 506 *solutions of the equations of fluid dynamics*, *Matematicheskii Sbornik*, 47 (1959), pp. 271–
 507 290.
- 508 [24] M. GUGAT, M. HERTY, A. KLAR, AND LEUGERING, *Optimal control for traffic flow networks*,
 509 *Journal of optimization theory and applications*, 126 (2005), pp. 589–616.
- 510 [25] A. HEGYI, B. DE SCHUTTER, AND J. HELLENDORN, *Model predictive control for optimal coor-*
 511 *dination of ramp metering and variable speed limits*, *Transportation Research Part C*, 13
 512 (2005), pp. 185–209.
- 513 [26] A. HEGYI, B. DE SCHUTTER, AND J. HELLENDORN, *Optimal coordination of variable speed*
 514 *limit to suppress shock waves*, *IEEE Transactions on intelligent transportation systems*, 6
 515 (2005), pp. 102–112.
- 516 [27] A. HEGYI AND S. P. HOOGENDOORN, *Dynamic speed limit control to resolve shock waves on*
 517 *freeways - Field test results of the SPECIALIST algorithm*, in *13th International IEEE*
 518 *Annual conference on Intelligent Transportation Systems*, 2010, pp. 519–524.
- 519 [28] A. HEGYI, S. P. HOOGENDOORN, M. SCHREUDER, AND H. STOELHORST, *The expected effectivity*
 520 *of the dynamic speed limit algorithm SPECIALIST - a field data evaluation method*, in
 521 *Proceedings of the European Control Conference*, 2009, pp. 1770–1775.
- 522 [29] A. HEGYI, S. P. HOOGENDOORN, M. SCHREUDER, H. STOELHORST, AND F. VITI, *SPECIALIST:*
 523 *A dynamic speed limit control algorithm based on shock wave theory*, in *Proceedings of the*
 524 *11th International IEEE Conference on Intelligent Transportation Systems*, 2008, pp. 827
 525 – 832.
- 526 [30] Z. HOU, J.-X. XU, AND H. ZHONG, *Freeway traffic control using iterative learning control-based*
 527 *ramp metering and speed signaling*, *IEEE Transactions on vehicular technology*, 56 (2007),
 528 pp. 466–477.
- 529 [31] D. JACQUET, M. KRSTIC, AND C. CANUDAS DE WIT, *Optimal control of scalar one-dimensional*
 530 *conservation laws*, in *Proceedings of the 2006 American Control Conference*, 2006,
 531 pp. 5213–5218.
- 532 [32] S. N. KRUZHKOVA, *First order quasilinear equations with several independent variables*, *Math-*
 533 *ematicheskii Sbornik*, 81 (1970), pp. 228–255.
- 534 [33] M. J. LIGHTHILL AND G. B. WHITHAM, *On kinematic waves. II. A theory of traffic flow on*
 535 *long crowded roads*, *Proc. Roy. Soc. London Ser. A*, 229 (1955), pp. 317–346.
- 536 [34] J. REILLY, W. KRICHENE, M. L. DELLE MONACHE, S. SAMARANAYAKE, P. GOATIN, AND A. M.
 537 BAYEN, *Adjoint-based optimization on a network of discretized scalar conservation law*
 538 *PDEs with applications to coordinated ramp metering*, *Journal of optimization theory and*
 539 *applications*, 167 (2015), pp. 733–760.
- 540 [35] P. I. RICHARDS, *Shock waves on the highway*, *Operations Research*, 4 (1956), pp. 42–51.
- 541 [36] S. ULBRICH, *A sensitivity and adjoint calculus for discontinuous solutions of hyperbolic con-*
 542 *servation laws with source terms*, *SIAM Journal on control and optimization*, 41 (2002),
 543 pp. 740–797.
- 544 [37] S. ULBRICH, *Adjoint-based derivative computations for the optimal control of discontinuous*
 545 *solutions of hyperbolic conservation laws*, *Systems and control letters*, 48 (2003), pp. 313–
 546 328.
- 547 [38] X. YANG, Y. LIN, Y. LU, AND N. ZOU, *Optimal variable speed limit control for real-time free-*

548
549

way congestions, in 13th COTA International Conference of Transportation Professionals (CICTP 2013), P. Social and B. Sciences, eds., vol. 96, 2013, pp. 2362–2372.