



HAL
open science

Plasma beam characterization along the magnetic nozzle of an ECR thruster

Sara Correyero, J. Jarrige, D. Packan, Eduardo Ahedo

► **To cite this version:**

Sara Correyero, J. Jarrige, D. Packan, Eduardo Ahedo. Plasma beam characterization along the magnetic nozzle of an ECR thruster. Plasma Sources Science and Technology, IOP Publishing, 2019, 28 (9), pp.095004. 10.1088/1361-6595/ab38e1 . hal-02794843

HAL Id: hal-02794843

<https://hal.archives-ouvertes.fr/hal-02794843>

Submitted on 5 Jun 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

ACCEPTED MANUSCRIPT

Plasma beam characterization along the magnetic nozzle of an ECR thruster

To cite this article before publication: Sara Correyero *et al* 2019 *Plasma Sources Sci. Technol.* in press <https://doi.org/10.1088/1361-6595/ab38e1>

Manuscript version: Accepted Manuscript

Accepted Manuscript is “the version of the article accepted for publication including all changes made as a result of the peer review process, and which may also include the addition to the article by IOP Publishing of a header, an article ID, a cover sheet and/or an ‘Accepted Manuscript’ watermark, but excluding any other editing, typesetting or other changes made by IOP Publishing and/or its licensors”

This Accepted Manuscript is © 2019 IOP Publishing Ltd.

During the embargo period (the 12 month period from the publication of the Version of Record of this article), the Accepted Manuscript is fully protected by copyright and cannot be reused or reposted elsewhere.

As the Version of Record of this article is going to be / has been published on a subscription basis, this Accepted Manuscript is available for reuse under a CC BY-NC-ND 3.0 licence after the 12 month embargo period.

After the embargo period, everyone is permitted to use copy and redistribute this article for non-commercial purposes only, provided that they adhere to all the terms of the licence <https://creativecommons.org/licenses/by-nc-nd/3.0>

Although reasonable endeavours have been taken to obtain all necessary permissions from third parties to include their copyrighted content within this article, their full citation and copyright line may not be present in this Accepted Manuscript version. Before using any content from this article, please refer to the Version of Record on IOPscience once published for full citation and copyright details, as permissions will likely be required. All third party content is fully copyright protected, unless specifically stated otherwise in the figure caption in the Version of Record.

View the [article online](#) for updates and enhancements.

Plasma beam characterization along the magnetic nozzle of an ECR thruster

S. Correyero¹, J. Jarrige², D.Packan², E. Ahedo¹

¹Equipo de Propulsión Espacial y Plasmas, Universidad Carlos III de Madrid, Leganés, Spain,

²ONERA, The French Aerospace Laboratory, Palaiseau, Paris, France,

Email:scoreye@uc3m.es.

ABSTRACT:

Experimental characterization of plasma properties along the magnetic nozzle of an Electron Cyclotron Resonance thruster is presented here. A permanent magnet prototype and a solenoid prototype are tested, whose main difference relies on the magnetic field strength and topology. A cylindrical Langmuir probe is used to measure plasma potential, plasma density and electron temperature. In the permanent magnet thruster set-up, a Laser Induced Fluorescence diagnostics is performed simultaneously with the Langmuir probe to measure the mean ion kinetic energy, and a Faraday gridded probe to characterize the angular plasma beam. An effective electron cooling rate has been identified, as well as the dependence of the total plasma potential drop with the mass flow rate. Results are compared with a supersonic collisionless fluid-kinetic 1D model where electron dynamics account for magnetic mirror effects and potential barriers, while ions are treated as a fluid cold species. The comparison allows to estimate the sonic transition of the plasma flow.

I INTRODUCTION

In simple terms, a magnetic nozzle (MN) consists of a divergent magnetic field generated by a set of solenoids or permanent magnets, whose main function is to confine and accelerate the plasma beam. Interest in MNs has increased significantly during the past years, [1–3], accelerating the development of the so-called MN plasma thrusters, such as the helicon thruster [2, 4, 5], the Variable Specific Impulse Magnetoplasma Rocket (VASIMR) [6], the applied-field magnetoplasma dynamic thruster [7, 8] or the electron cyclotron resonance (ECR) thruster [9, 10]. Among its numerous advantages over other acceleration systems, noteworthy are its contactless character, which reduces erosion and can extend the thruster lifetime, its versatility which allows to adapt the magnetic field topology in flight or its easy scalability. However, plasma dynamics in a MN involve complex physical mechanisms that are yet not fully understood, and are crucial to determine the thruster performance. Several authors have contributed significantly to the development of this device, providing insightful theoretical and experimental research involving MN expansions, such as plasma detachment [11–15], formation of ambipolar electric field [16–18] and magnetic thrust generation [19–21]. Ideally, modelling and testing must make progress together, since one without the other may fall short under scientific scrutiny.

Experimental characterization of the plasma beam properties along a MN can reveal not only the thruster performance, but also important physical aspects concerning plasma expansion dynamics that are still unclear. For instance, the evolution of the electrons along the divergent magnetic field is still a subject of discussion.

1 Takahashi *et al.* in [22] studied the thermodynamics of a magnetized electron gas expansion, showing the corre-
2 lation between an external electric field and the polytropic index. Little and Choueiri in [23] characterized the
3 axial variation of macroscopic quantities in a RF plasma beam and investigated the electron cooling phenomena,
4 comparing its results with a fluid 1D model that included electron heat conduction and revealing the critical
5 need for improved 1D models to describe the MN expansion. More recently, experimental studies performed by
6 Kim *et al.* in [24,25] showed the coexistence of adiabatic expanding electrons and isothermal confined electrons
7 along the MN of an ECR thruster. In this sense, the requirement for accurate experimental data and validation
8 of advanced theoretical models for MNs is clear.
9

10
11
12
13 On the experimental side, ONERA has been developing an ECR thruster during the past years consisting
14 of an ECR coaxial cavity followed by a divergent MN [10]. Multiple research has been done concerning this
15 technology: Vialis *et al.* performed the first direct thrust measurements in [21], an analytical model of the
16 ECR source was developed to identify the most important physical features in the ECR discharge [26], Lafleur
17 *et al.* performed a theoretical and experimental investigation in [27] to determine the relationship between the
18 maximum ion energy and the upstream electron temperature in this device, founding a value of 4-5. In order
19 to contribute to the previous research, and characterize longitudinally the plasma expansion along the center
20 line of the ECR thruster, this work presents the first complete measurements of plasma potential, electron
21 density, electron temperature, and ion velocity along the expansion. Two ECR prototypes are tested, with
22 two different MN topologies. A parametric study of variation of the mass flow rate \dot{m} is presented, which is
23 crucial to understand the expansion dynamics, since the electron temperature and the isotropization of the
24 electron energy distribution function are highly dependent on this parameter. Langmuir probes have been used
25 to characterize the evolution of plasma properties along the axis of the MN, and a Laser Induced Fluorescence
26 (LIF) diagnostics has been employed to determine the mean ion velocity in the thruster exit plane and along
27 the center line of the expansion [28]. Angular scans of the ion current have been performed at different xenon
28 mass flow rates to estimate thruster performances partially.
29

30
31
32
33
34
35
36
37 The fluid-kinetic quasi-1D steady-state model by Martinez-Sanchez, Ahedo and Navarro [29] is here
38 adapted to analyze the experimental data along the MN of the thruster. The model determines self-consistently
39 the axial profile of the ambipolar electric potential and the electron distribution function of a magnetized
40 fully-divergent plasma expansion. Contrary to the commonly used fitted polytropic laws, the model in [29]
41 determines directly the exact solution of the electron velocity distribution function and the total potential drop
42 in the magnetized expansion, which for near-cold ions, only depends on the ion to electron mass ratio.
43

44
45
46
47
48
49
50
51
52 This paper is organized as follows: Section II explains the set-up developed at ONERA, Section III
53 presents the main experimental results, Section IV describes the model used to predict the plasma proper-
54 ties along the expansion and compares the experimental data with the theoretical model. Finally, Section V
55 concludes the main results of the research.

56 II EXPERIMENTAL SET-UP

57 II.1 The ECR thruster of ONERA

58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

dimensions $L_s = 15$ mm and $R_s = 13.5$ mm followed by a divergent MN. 2.45 GHz electromagnetic waves are emitted by a stainless steel antenna of 0.9 mm radius placed at the thruster axis and the electron resonance condition is achieved at 875 G. Two different prototypes are tested, where the magnetic field is either generated by a solenoid (SO) or by a permanent magnet (PM) named ECR-PM-V1 in [21]. The back of the source is limited by a dielectric back plate made of boron nitride. The thrusters are electrically isolated by an in-line microwave component called Direct Current Blocker (DC block), which allows them to be electrically floating. The propellant is injected at the back plate of the source through two holes of 2 mm diameter located symmetrically at two mid-points of the source radius. The external magnetic field strength at the thruster back plate is fixed at 900 G for both prototypes, but the PM thruster has a smaller axial gradient, which shifts downwards the plasma detachment and results in a less divergent plasma beam. Figure 1 compares the magnetic field strength at the thruster's axis as a function of the distance to the thruster exit plane (corresponding to $z = 0$).

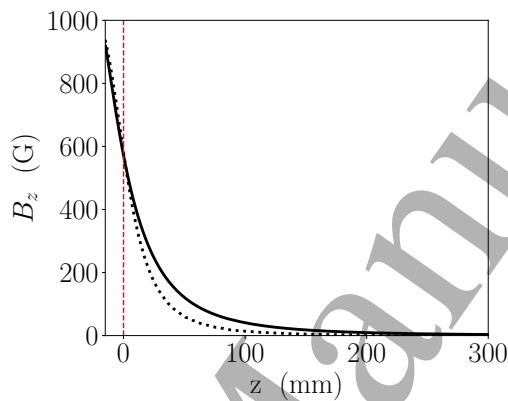


Figure 1: Applied magnetic field strength at thruster axis in the PM (—) and SO (·····) ECR prototypes. $z = 0$ corresponds to the thruster exit plane.

II.2 Subsystems and operating conditions

The microwave power is injected by means of a solid state amplifier. It is constituted by a signal generator (between 2.3 and 2.6 GHz) and a linear amplifier, and the maximum power it can deliver is around 100 W. The power is transmitted by a 50 Ohm coaxial cable, whose losses have been measured using a vector network analyzer. The output of the generator is connected directly to a circulator with a 50 Ohm load, which allows the reflected power to be absorbed and dissipated in the load. Subsequently and before entering the feedthrough, the power line contains a bi-directional coupler connected to two different diodes that are in charge of measuring the forward and reflected power at this point of the line. Figure 2 shows a schematic of the the microwave power line set-up.

In this study, the power absorbed by the plasma was set at 30 ± 2 W (determined by recording the input and reflected power measured by the bi-directional coupler). The measured reflected power was less than 3 % in all the cases presented here. The level of radiated power was evaluated when the thruster was ignited and was found to be negligible and the attenuation level in the coaxial cable inside the chamber was characterized with a Vector Network Analyzer. With this procedure, the absorbed power was estimated to be very close to the

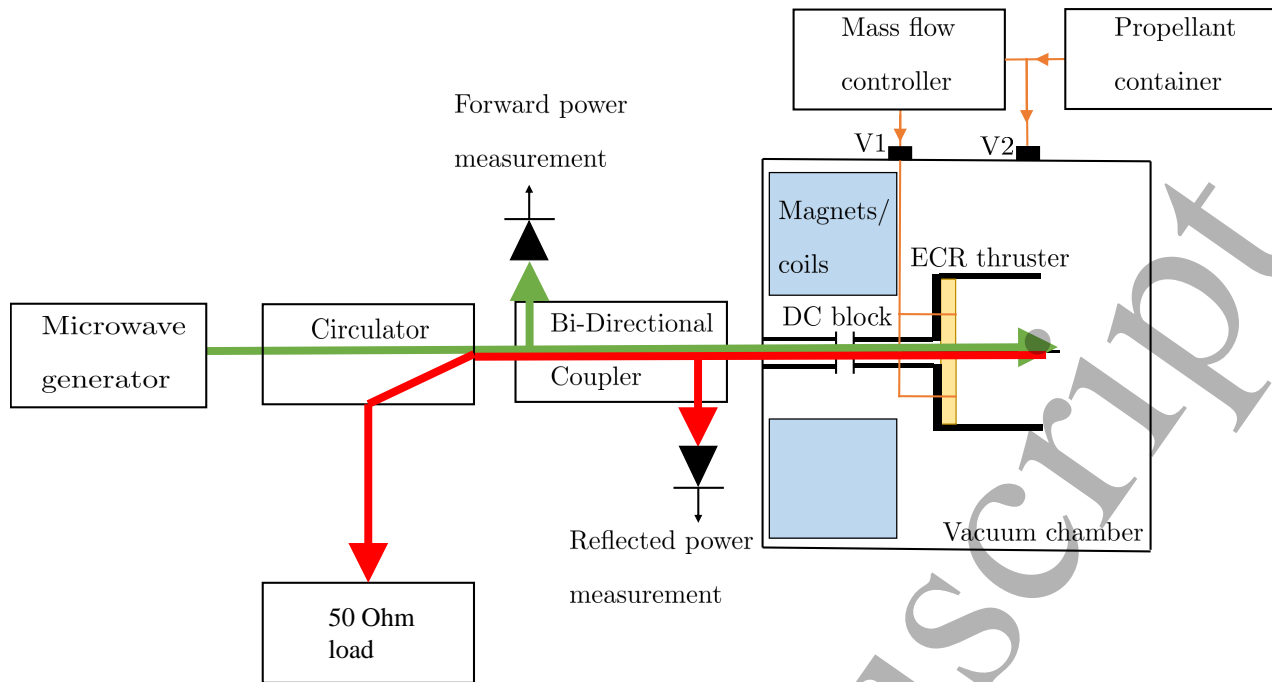


Figure 2: Schematic of the thruster and subsystems in the vacuum setup

input power in this set-up ($\approx 95\%$). Finally, the xenon mass flow rate varied within the range $\dot{m} = (0.08 - 0.2)$ mg/s.

The tests have been done at ONERA-Palaiseau facilities. The vacuum chamber, known as B09, consists of a cylindrical vessel with dimensions of 0.8 m diameter and 2 m long. The pumping is done by one primary pump, three Pfeiffer Hipace (2000 l/s N_2) turbomolecular pumps, and one cryogenic pump, allowing to achieve a background pressure of 10^{-7} mbar and a xenon pumping speed of 13000 l/s.

II.3 Diagnostics

In order to characterize longitudinal profiles of the plasma properties along the MN expansion, two different diagnostics were installed: Laser Induced Fluorescence (LIF) optical set-up to measure the ion velocity distribution function (IVDF) and cylindrical Langmuir probes to obtain information about the electron energy probability function (EPPF). Additionally, a Faraday gridded probe was installed in a rotation stage placed at 28 cm from the thruster exit plane to perform angular scans of the total ion current. The different diagnostics are detailed below.

II.3.1 Cylindrical Langmuir probe

A cylindrical Langmuir probe of 0.1 mm diameter and 6 mm length was placed in a 2D translation stage, so it could operate at different longitudinal positions. The tip probe was made of tungsten wire and it was held in a ceramic tube. The I-V characteristic curve was successfully obtained at different locations without perturbing significantly the thruster performance (from 75 to 250 mm from the thruster exit plane for the

1 PM prototype, and from 40 to 280 mm for the SO prototype) and local values of plasma potential, electron
2 density and electron temperature were computed. It was not possible to place the probe closer to the thruster,
3 because significant variations on the floating thruster potential were detected, an indication that the diagnostic
4 was interfering the thruster performance. The floating thruster potential was measured using a commercial
5 multimeter external to the vacuum chamber.
6
7

8
9 One of the main concerns when placing a Langmuir probe in the presence of a magnetic field is the tip
10 orientation with respect to the magnetic field lines. The Larmor or gyro radius was expected to be greater than
11 the probe radius in all the range studied here, so no magnetic field effect should in principle be captured [30].
12 To ensure this fact, and since the gyro radius was not well known due to the uncertainty on the electron
13 temperature, a previous test was performed with the Langmuir probe placed in a rotation stage. Acquisitions
14 were taken with the probe placed parallel and perpendicular to the magnetic field lines and no significant
15 difference in the I-V curve was found. For this reason, the effect of the probe orientation was neglected in the
16 present work, and the electron temperature shown here should be understood as a total value of the electron
17 energy (including parallel and perpendicular orientations).
18
19
20
21
22
23
24
25
26
27
28
29
30

31 **II.3.2 LIF**

32
33 A 1D Laser Induced Fluorescence diagnostic was mounted together with the electrostatic probes (Lang-
34 muir and Faraday gridded) to measure the projection of the ion velocity distribution function along the thruster
35 axis direction. All optics were fixed to the vacuum chamber, and the thruster was moved using a 3D translation
36 stage. With this setup, any point in the thruster source and along the plume could be measured. It must be
37 noticed that this diagnostic was only installed when operating the PM thruster, since the SO prototype includes
38 water cooling tubes and high current cables (130 A) that were not compatible with the 3D translation stage.
39
40
41
42
43
44
45

46 The LIF calibration and specific details of the optical setup are explained in [28], as well as the main
47 results from the LIF measurements presented in this work. The laser consists of a SDL-TC10 tunable laser
48 diode with 20 mW of maximum output power and the frequency span for this measurements was 25 GHz, which
49 allowed measuring axial ion velocities up to 20 km/s.
50
51
52

53 The laser was aligned with the thruster axis and injected through a lens of 25 mm diameter. The detection
54 was composed of a 50 mm lens and a 200 μm optic fiber. The probed volume was around 1 mm diameter. The
55 optics were installed 450 mm from the measurement point, to avoid perturbation and intrusion in the plasma
56 beam. The detection was installed with an angle of 35° and a camera was fixed to the thruster to verify
57 alignment between the laser and the detection. Figure 3 schematizes the set-up.
58
59
60

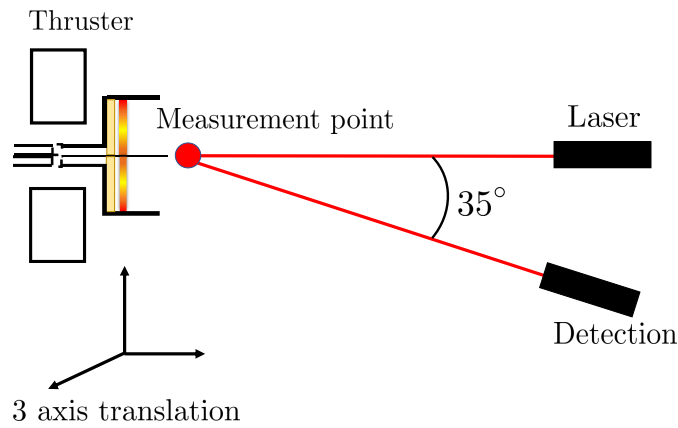


Figure 3: Schematic of optical LIF setup inside the vacuum chamber

II.3.3 Faraday gridded probe

To estimate the mass utilization efficiency at different mass flow rates, the total ion current was measured with a one-grid Faraday probe. Angular profiles of the ion current density were obtained by performing angular scans of current with the probe mounted in a rotation stage at 28 cm from the thruster exit plane. The beam is assumed to be axisymmetric and composed by only single ionized ions. The probe used here is described in [27], and consists of a 6 mm diameter collector with a front grid of 60% transparency. The voltage was biased at a sufficiently negative value to ensure the probe was working in the ion saturation region of the I-V curve. The procedure was the following: The probe was placed facing the plume at the thruster axis, and the collector was biased more negatively until there was no variation in the collected current (≈ -300 V). Then, the ion current was estimated by means of an external resistor. The Faraday probe was only mounted in the PM prototype setup.

III RESULTS

This Section presents the results of the two magnetic systems setups used for the ECR thruster. All the tests presented here were carried out at 30 ± 2 W of absorbed power and xenon mass flow rates of 1, 1.5, 2.0 sccm for the PM thruster and 0.8, 1 sccm for the SO thruster. In both setups, the Langmuir probe described in Section II was installed in a translation stage which allowed the probe tip to be aligned with the thruster axis at different axial positions. Additionally, in the PM thruster setup, the LIF optical assembly and the Faraday probe described in Section II were also installed. In this Section results are organized by diagnostic.

III.1 Langmuir probe: Plasma properties ϕ , n_e , T_e

The plasma potential at each axial position was obtained from the inflection point of the I-V characteristic curve, and the electron energy distribution function (EEDF) was computed with the Druvesteyn formula [31],

shown in equation 1, where $F(\epsilon)$ represents the EEDF, $g(\epsilon)$ the electron energy probability function (EEDF), m_e and q the electron mass and charge respectively and A the probe surface area. Figure 4 shows an example of the I-V curve and the calculated EEDF at 1 sccm, at 105 mm from the PM thruster exit plane. The electron density and temperature can be computed by taking the corresponding integrals of the EEDF, as it is shown in equations 2 and 3. Notice that since the EEDF is not Maxwellian, T_e stands for an effective electron temperature. These formulas give reliable results when a magnetic field is present if the condition $r_L \gg r_s$ is satisfied, where r_L represents the electron Larmor radius or gyroradius and r_s the effective collecting area of the probe. This assumption can be problematic at the closest locations to the thruster exit plane, since the electron Larmor radius could remain of the same order as the probe sheath length. For instance, for the SO thruster, at $z=80$ mm the r_L expected should be around 4 mm, while the estimated r_s is 2.61 mm. However, in most of the analyzed region, the condition $r_L \gg r_s$ is well satisfied.

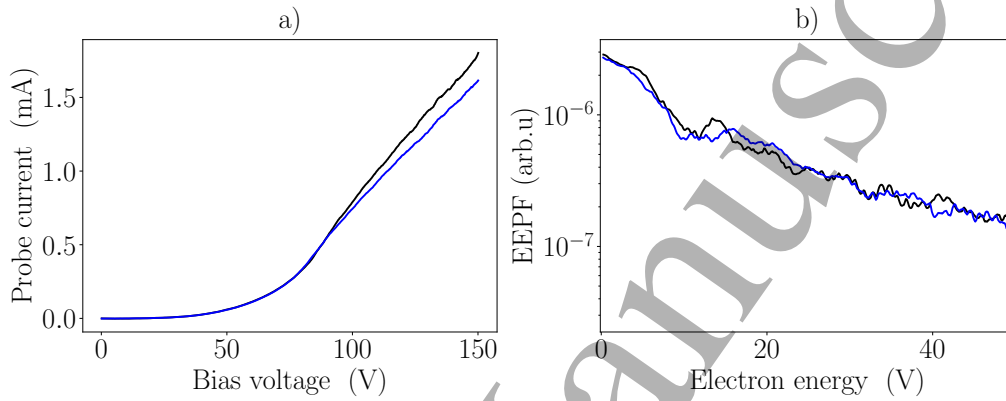


Figure 4: a) I-V curves at 2 sccm of xenon, at different axial locations from the PM thruster exit plane and b) the computed EEDF.

$$F(\epsilon) = g(\epsilon)\sqrt{\epsilon} = \frac{2\sqrt{2m_e\epsilon}}{q^3 A} \frac{d^2 I}{dV^2} \quad (\text{Eq. 1})$$

$$n_e = \frac{2\sqrt{2m_e}}{|q|A} \int_0^{-\infty} \frac{d^2 I}{dV^2} \sqrt{\frac{V}{|q|}} dV \quad (\text{Eq. 2})$$

$$T_e = \frac{4\sqrt{2m_e}}{3n_e A} \int_0^{-\infty} \frac{d^2 I}{dV^2} \left(\frac{V}{|q|}\right)^{3/2} dV \quad (\text{Eq. 3})$$

Figure 5 shows the plasma properties measured with the Langmuir probe along the center line of the PM thruster plume. Plasma potential ϕ , electron density n_e and electron temperature T_e have been estimated from 75 mm to 250 mm downstream, at three different xenon mass flow rates 1, 1.5 and 2 sccm, where $z = 0$ corresponds to the thruster exit plane. The plasma potential ϕ has been plotted referred to its value at $z = 75$ mm. Figure 5 (a) shows there is a direct relation between the mass flow rate and the plasma potential profile in the studied region: at higher mass flow rates, lower is the plasma potential drop. This behaviour is directly related to the electron temperature at the plasma source [27], which is highly dependant on the mass flow rate.

The spatial range of the Langmuir probe measurements was limited to 250 mm from the thruster exit plane due to the translation stage length. Moreover, positioning the probe closer than 75 mm from the exit

plane disturbed significantly the thruster performance. For this reason, within 0-75 mm, the experiment was considered highly intrusive. Although the plasma potential profiles have been found to be almost flat beyond 200 mm, upstream of 75 mm a high ambipolar potential gradient is expected, and therefore the near region can not be neglected to estimate the entire plasma potential profile curve. In the ECR thruster tested here, with its particular magnetic field topology, the first 10 cm down from the thruster exit plane are crucial to the ions acceleration (and therefore to the plasma potential), as it is confirmed in Section III.2. In order to complete the near region of the plasma potential profile, the LIF optical setup was installed, total ion energy was assumed to be conserved, and the plasma potential in the near region was estimated by means of the LIF diagnostics.

Figure 5 (b) shows the estimated electron density n_e measured with the Langmuir probe. As it is expected, it shows an increase with the mass flow rate. At 75 mm, densities in the order of 10^{15} m^{-3} have been found. Finally, the electron temperature T_e shows the opposite behaviour; it decreases with the mass flow rate (see figure 5 (c)). The total absorbed power measured for all cases is 30 W, so for lower mass flow rates, more energy is spent in heating the electrons, instead of ionizing the plasma. An effective electron cooling has been measured along the expansion at different operating conditions. To identify the electron cooling rate, the electron temperature has been plotted against the electron density in a logarithm scale in figure 5 (d). Polytropic coefficients of 1.23 ± 0.02 , have been found, all of them below the adiabatic expansion coefficient $5/3$ and similar to the values found by other authors in magnetically expanding plasmas [23,32]. However, this value only corresponds to a delimited region of the expansion.

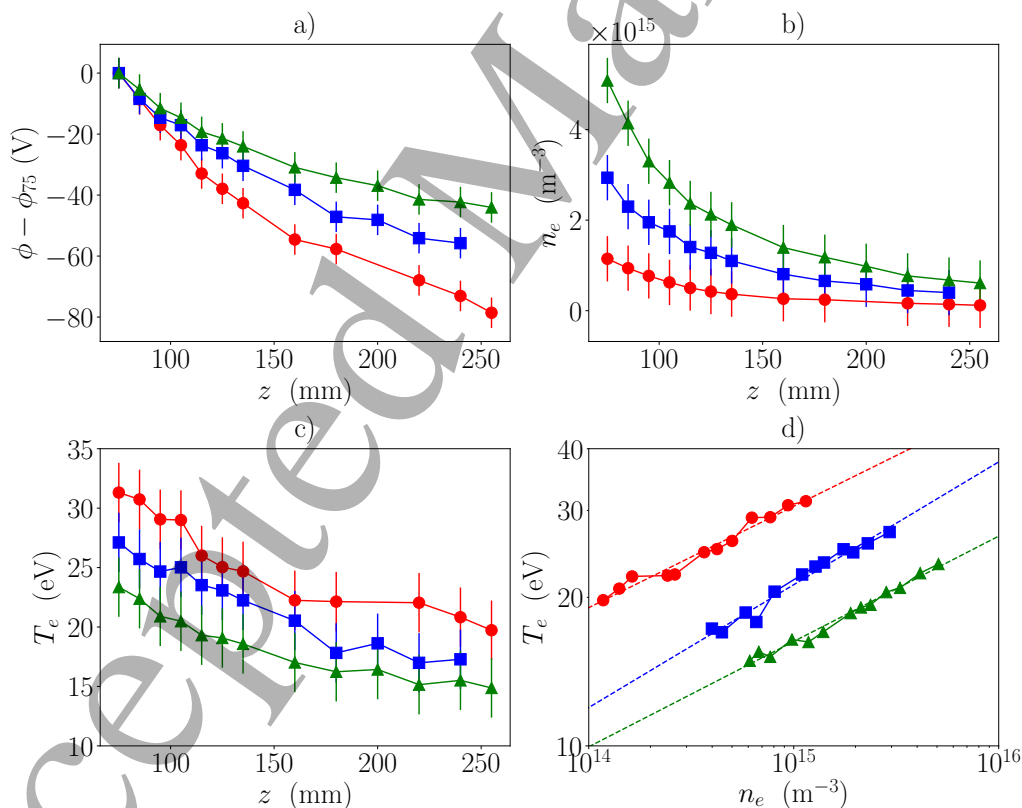


Figure 5: Plasma properties measured with the Langmuir probe, along the center line of the PM thruster. $z = 0$ corresponds to the thruster exit plane. Measurements were taken at 30 W of power and different mass flow rates: 1 sccm (—●—) 1.5 sccm (—■—), 2 sccm (—▲—).

1 Experimentally, covering the whole region of the expansion can add insight on the electron cooling
2 mechanism, and in this sense, the Langmuir probe measurements in the SO thruster plume represent a farther
3 zone of the MN, where there is a higher drop of the magnetic field strength. Figure 6 shows the plasma properties
4 measured with the Langmuir probe along the magnetic field expansion of the SO thruster. The Langmuir probe
5 was operated from $z = 40$ to $z = 290$ mm. In this experiment, the thruster performance was found stable from
6 40 mm downwards. As it can be observed in figure 6 (a), in the range from $z = 75$ mm to $z = 250$ mm, at 1
7 sccm, the plasma potential has decreased around 35 V, while in the same spatial region for the PM thruster,
8 the total drop was around 80 V. This is due to the fact that the acceleration region for the PM thruster is wider
9 than for the SO thruster, which is a direct consequence of the MN topology. Concerning the plasma density, a
10 factor of two has been found between the SO thruster and the PM thruster for the same operation conditions,
11 being higher in the SO thruster plume (see figure 6 (b)).
12
13
14
15
16
17
18
19
20
21
22
23
24
25

26 Interestingly, the electron temperature profile measured in the SO thruster plume differs from the ten-
27 dency measured along the nozzle of the PM thruster. As it is shown in figure 6 (c), it is possible to identify
28 two different regions; while the first measurements from $z = 40$ to $z = 100$ mm reveal a sharp decrease in the
29 electron temperature, beyond $z = 100$ mm the curve remains almost flat, reaching an asymptotic value around
30 10 eV. In order to study this behaviour, the electron temperature is plotted against the electron density in a
31 logarithm scale (figure 6 (d)). In contrast to the PM thruster, two different polytropic coefficients γ have been
32 identified here, $\gamma = 1.55$ close to the thruster exit and $\gamma = 1.17$ farther downstream. Similar trends have been
33 found at 0.8 sccm (—◆—) and 1 sccm (—●—) of xenon in the SO thruster plume, being the total plasma potential
34 drop at 0.8 sccm slightly higher. The experiments by Kim *et. al* in [24, 25] also found various values of the
35 polytropic index along a MN expansion. In conclusion, these results indicate that the plasma expansion is
36 more complex than polytropic. Indeed, the the MN model briefly presented later will confirm that there is not
37 a simple polytropic law.
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53

54 In figure 7 the electron density has been plotted against the plasma potential in logarithm scale, and
55 compared to the Boltzmann relation and the different polytropic cooling laws. In the PM thruster (figure 7
56 (a)), a polytropic cooling law represents well the near region of the expansion, but downstream it leads to
57 a non-negligible deviation. In the SO thruster plume (figure 7 (b)), the non local behaviour (i.e. change in
58 polytropic factor) is again visible.
59
60

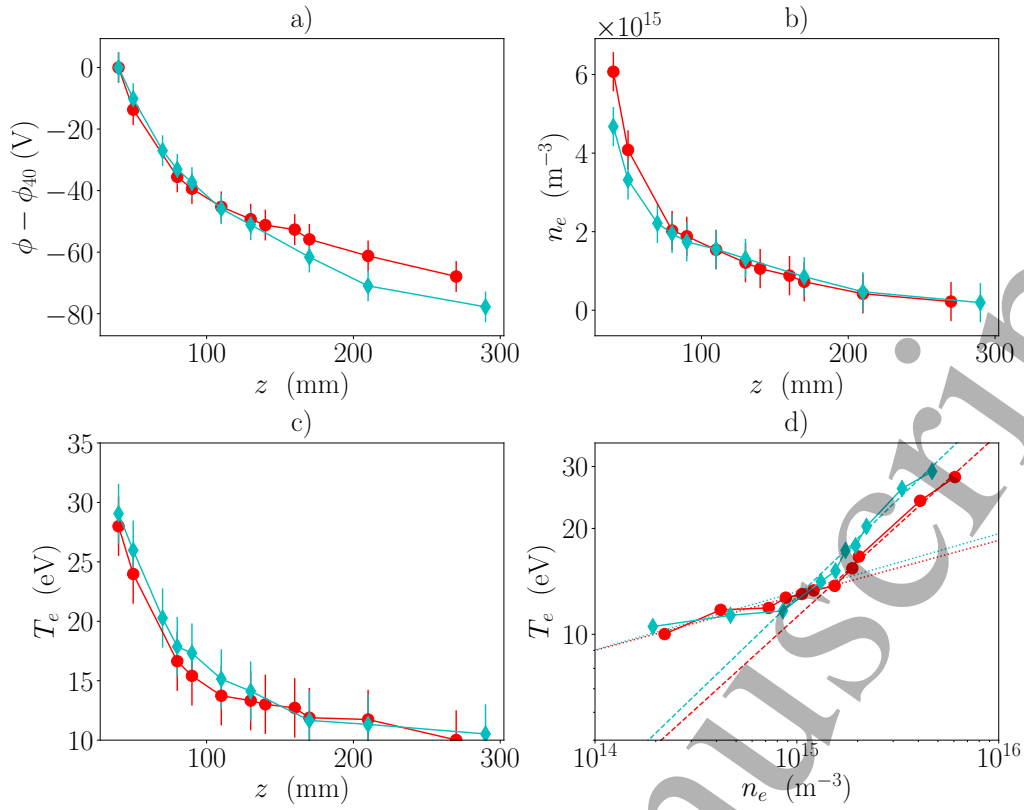


Figure 6: Plasma properties measured with the Langmuir probe, along the center line of the SO thruster. $z = 0$ corresponds to the thruster exit plane. Measurements were taken at 30 W of power and different mass flow rates: 0.8 sccm (\blacklozenge) 1 sccm (\bullet)

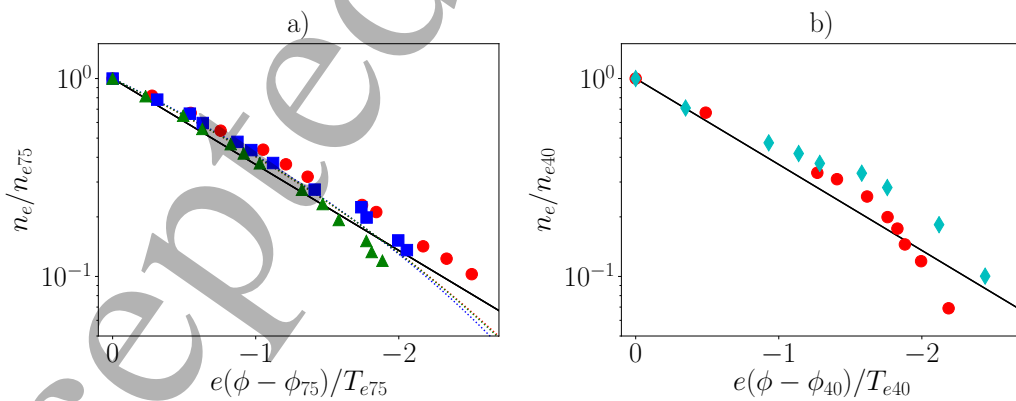


Figure 7: Normalized plasma density n_e/n_{e75} versus $e(\phi - \phi_{75})/T_{e75}$ estimated with the Langmuir probe for a) PM thruster and Normalized plasma density n_e/n_{e40} versus $e(\phi - \phi_{40})/T_{e40}$ b) SO thruster. 0.8, 1, 1.5, and 2 sccm are represented by (\blacklozenge), (\bullet), (\blacksquare), (\blacktriangle), respectively. The solid line corresponds to the Boltzmann expansion, while the dashed lines in a) represent polytropic expansions with $\gamma = 1.23 \pm 0.02$.

III.2 LIF: Mean axial ion velocity u_i

The optical LIF diagnostics were installed together with the Langmuir probe in the PM thruster set-up. The thruster was operated at 30 W and at three different mass flow rates. LIF measurements were performed at several axial positions along the center line of the thruster axis; inside the thruster source and in the near plume region (from $z = -5$ mm and $z = 125$ mm). Three examples of different LIF spectra obtained with the same acquisition parameters (sweep time of the laser and time constant of the lock-in amplifier) are shown in figure 8 (a). It is noteworthy that there is a broadening of the peaks inside the thruster, which could be either due to Zeeman splitting of the 834.7 nm transition, or to the production of charge ex-change ions. The possible effect of Zeeman splitting in this region is a current line of research. Relative density and mean axial velocity have been computed and represented in figure 8 (b). Since the ECR region is located near the backplate, and the magnetic field is fully divergent, the generated ions are already slightly accelerated inside the source. The measured ion velocity at the thruster exit plane is 2250, 1950 and 1900 m/s at 1, 1.5 and 2 sccm, respectively. Currently, an uncertainty of the ECR thruster performance is the location of the sonic transition from a subsonic plasma jet to a supersonic beam, due precisely to the coupling of ionization and acceleration processes, so obtaining accurate data of the ion velocity and density in this region can be crucial to understand this phenomenon. Figure 8 (b) shows a unexpected trend of the relative ion density between 5 and 10 mm from the thruster exit. These results could be due to production of secondary ions in this region, but it must be confirmed with additional measurements.

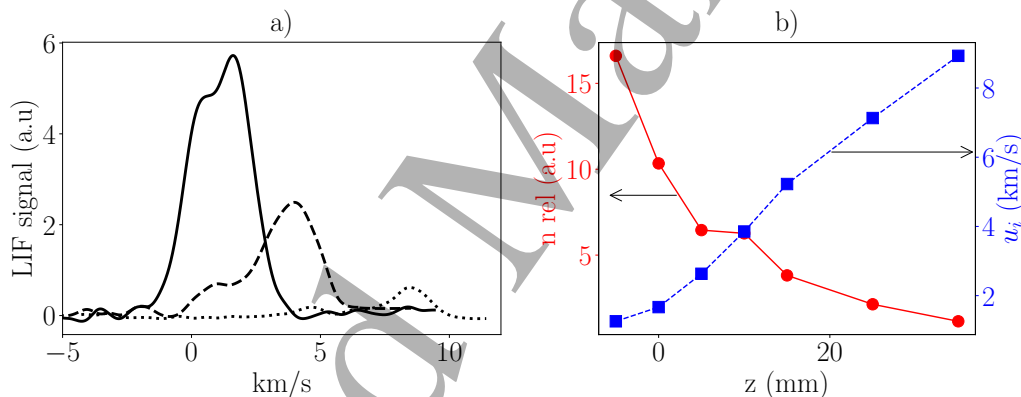


Figure 8: a) LIF signal already centered with the reference discharge at different axial positions: -5 mm (—), 10 mm (---) and 35 mm (·····). b) Computed relative density (—■) and mean axial velocity (—●) from the LIF signals. Operating conditions were 1.5 sccm and 30 W.

The mean axial ion velocity has been determined from the LIF signal for each axial position, at 30 W of absorbed power and three different mass flow rates 1, 1.5 and 2 sccm. The longitudinal profiles are shown in figure 9 (a). Lower mass flow rates lead to higher ion velocities. The highest ion velocity measured at 100 mm from the thruster exit in this set-up was 16 km/s for 1 sccm. However, the current density also decreases with the distance, and LIF measurements could not be performed beyond 100 mm at 1 sccm. The ion velocity axial gradient has been also plotted in figure 9 (b). It can be seen that the strongest gradient is located between 5 and 15 mm from the thruster exit plane, region where the electric field is more intense. As well, the maximum velocity gradient is shifted at the different operating conditions, being closer to the thruster exit plane at lower

mass flow rates.

It can be seen that the acceleration region is not complete at the end of the LIF measurement range, henceforth LIF results in the near plume region have been completed with Langmuir probe measurements in the far plume region.

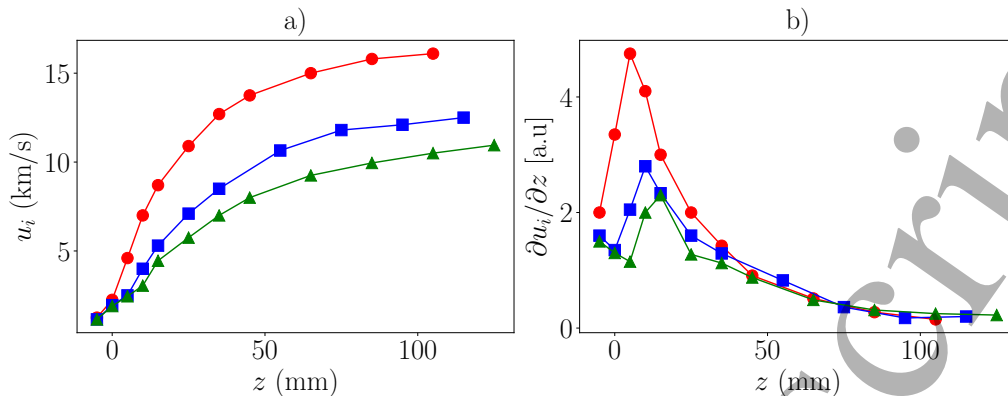


Figure 9: a) Mean axial ion velocity measured with the LIF set-up, along the center line of the PM thruster and b) its axial derivative normalized between 0 and 1. $z = 0$ corresponds to the thruster exit plane. Measurements were taken at 30 W of power and different mass flow rates: 1 sccm (—●—), 1.5 sccm (—■—), 2 sccm (—▲—).

Finally, by assuming total ion energy is conserved, it is possible to calculate the plasma potential in the near plume from LIF measurements by overlapping the curves of kinetic energy and plasma potential in the region where LIF and Langmuir probe operated simultaneously. The resulting plasma potential profile from the thruster exit to the farthest measurement point, referred to the plasma potential at the ECR source is shown later in figure 14 (b). The total plasma potential drop from 0 to 250 mm is 236, 145 and 104 V, for 1, 1.5 and 2 sccm, respectively. It is noteworthy that this potential drop is not necessarily the total ion energy, since although the plasma potential profile is almost flat beyond 200 mm, the plasma expansion is not complete. One of the main contributions of this work is to compute the finite potential drop based on a fluid-kinetic plasma expansion model, and relate the percentage of plasma expansion with the spatial coordinates.

III.3 Faraday probe: Ion current

The gridded Faraday probe detailed in Section II.3.3 was installed in the PM thruster set-up. Angular scans of current density were taken at 28 cm from the thruster exit plane, at 30 W of absorbed power and three different mass flow rates 1, 1.5 and 2 xenon sccm. Figure 10 shows the measured angular profiles of ion current density, computed taking into account the surface of the probe and the grid transparency. It is noteworthy that the angular profiles of figure 10 do not reach the maximum current at 0 degrees, which is probably due to the fact that the antenna is located at the center line of the thruster, and influences the shape of the plasma beam. As well, the current design of the gas injection could also lead to non-homogeneities already in the plasma source, as it was pointed out by Vialis *et al.* in [21]. There is also a residual current at 90 degrees, which increases with the mass flow rate, which suggests that it could be due to charge ex-change collisions or additional ionization due to collisions between the ambient plasma and plume electrons.

The total ion current I_i is computed integrating the ion current density assuming an axisymmetric plume

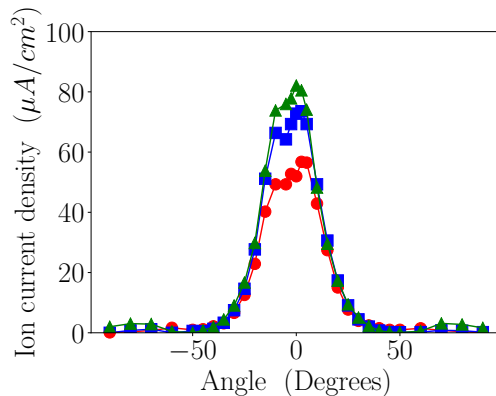


Figure 10: Angular scan of ion current density at 28 cm from the thruster exit: 1 sccm (\bullet), 1.5 sccm (\blacksquare) and 2 sccm (\blacktriangle).

and taking into account the distance to the thruster axis. Related to that current, a first parameter assessing the performance efficiency of the thruster is the mass efficiency, defined as

$$\eta_m = \frac{I_i m_i}{\dot{m} q} \quad (\text{Eq. 4})$$

where: m_i is the ion mass, q is the elementary electric charge, and \dot{m} is the neutral gas mass flow rate. A second efficiency parameter is related to the plume divergence: if λ represents an effective far field divergence angle [33], a “plume efficiency” is given by $\cos^2 \lambda$. Table 1 details these two performance parameters, together with the measured chamber pressure. The low measured mass efficiency is an indication of a poor ionization, which is directly related to the mass-flow rate to power ratio, as it was reported in [21].

\dot{m} (sccm)	p_{ch} (10^{-6} mbar)	η_m (%)	$\cos^2 \lambda$	T_{e^*} (eV)	z_0 (mm)
1	2.8	23.2	0.857	44	7.4
1.5	3.5	17.6	0.892	27	11.8
2	3.7	14.2	0.887	19	12.5

Table 1: Chamber pressure, mass utilization efficiency η_m and plume efficiency $\cos^2 \lambda$ for the PM thruster. Two last columns: estimated electron temperature at the sonic point and its location for the MN model fitting.

IV COMPARISON OF PLUME DATA WITH THEORY

In order to understand and analyze the experimental data on the magnetized plasma plume emitted by the thruster, we resort to models of the MN. The most suitable one for a near-collisionless plasma is the kinetic one by Martínez-Sánchez et al. [29] which considers the expansion of a collisionless, quasineutral, magnetized plasma in a paraxial convergent-divergent MN, and solves for the ion and electron velocity distribution functions and the ambipolar electric potential. In the next Subsection, that ideal model is adapted to a divergent-only nozzle, in a way similar to the one Merino *et al.* [34] followed for an unmagnetized plasma plume. Then, Subsection IV.2 compares the experimental data with that model.

IV.1 Divergent nozzle model

Let us consider a divergent nozzle created by an applied magnetic field $B(z)$ monotonically decreasing from $z = z_0$, where from a plasma beam is with near-sonic conditions, to be defined below. This plasma is collisionless, quasineutral, current-free and fully-magnetized. Therefore, ions and electrons are perfectly channeled by the magnetic streamtubes. The model, being paraxial, determines only axial flows of radially-averaged magnitudes. If the initial cross-section of the beam is A_0 , the evolution of the cross section is inversely proportional to B : $A = A_0 B_0 / B$.

Individual electrons conserved their total energy E_e , and magnetic moment μ_e , defined as

$$E_e = \frac{m_e w_{e\parallel}^2}{2} + \frac{m_e w_{e\perp}^2}{2} - e\Delta\phi \quad (\text{Eq. 5})$$

$$\mu_e = \frac{m_e w_{e\perp}^2}{2B} \quad (\text{Eq. 6})$$

where: $w_{e\parallel}$ and $w_{e\perp}$ are velocity components parallel (i.e. axial) and perpendicular to the magnetic field ($w_{e\parallel}$ is also the electron gyrocenter velocity) and $\Delta\phi = \phi - \phi_0 \leq 0$.

For a current-free plasma, the self-consistent electric potential ϕ is monotonically decreasing, its role being to adjust the downstream current of very mobile electrons to the ion current, in a similar way a Debye sheath does close to a dielectric wall. However, when electrons are magnetized there is an additional effect. Combining the above two equations, the electron axial velocity satisfies

$$\frac{m_e w_{e\parallel}^2}{2} = E_e - \mu_e B + e\Delta\phi. \quad (\text{Eq. 7})$$

Therefore, the axial forward-motion ($w_{e\parallel} > 0$) of electrons is governed by two opposing forces: the electric one, which decelerates them, and the magnetic mirror effect, which accelerates them. The opposite is naturally true for back-marching electrons. As a consequence three different populations of electrons can be found in a divergent nozzle [35]: *free electrons*, emitted by the source and lost downstream (which constitute the electron current); *reflected electrons*, emitted by the source and turned back to the source; and *doubly-trapped electrons*, bouncing between two intermediate positions of the plume.

At the source, only the forward-marching velocity distribution function $f_{e+}(z_0)$ can be postulated, while the backward-marching distribution $f_{e-}(z)$ (at any location) is part of the solution. The semi-Maxwellian distribution

$$f_{e+}(E_e)|_{z_0} = n_{e*} \left(\frac{m_e}{2\pi T_{e*}} \right)^{3/2} \exp\left(-\frac{E_e}{T_{e*}}\right), \quad w_{e\parallel} > 0, \quad (\text{Eq. 8})$$

is chosen here. Parameters n_{e*} and T_{e*} would be the electron density and temperature at the source, n_{e0} and T_{e0} , only if $f_{e+} = f_{e-}$. Since most source electrons are reflected back, $n_{e*} \approx n_{e0}$ and $T_{e*} \approx T_{e0}$. While the populations of free and reflected electrons are totally determined in terms of $B(z)$ and $\phi(z)$, the determination of the population of doubly-trapped electrons is out of the capabilities of a collisionless, stationary model. The same postulates than in [29] will be used here for that population. Macroscopic electron magnitudes such as density n_e , parallel particle flow $n_e u_e$, pressure $n_e T_e$, and parallel heat flux q_e , are determined as velocity moments of the local distribution function $f_e = f_{e+} + f_{e-}$, in the way explained in [29].

Ions also conserve their total energy and magnetic moment, but in this case, both the electric force and the magnetic mirror accelerate them downstream the divergent nozzle. As a consequence all ions constitute a

free population, expanding supersonically, and a simple “cold fluid model” seems a good approximation [35].

Then, ion continuity and momentum equations are

$$n_i u_i / B = \text{const} = n_{i0} u_{i0} / B_0, \quad u_i = \sqrt{u_{i0}^2 - 2e\Delta\phi / m_i}. \quad (\text{Eq. 9})$$

Using B as independent variable instead of z , the self-consistent electric potential profile, $\phi(B)$, is determined by satisfying [29] plasma quasineutrality

$$n_e(\phi(B), B) = n_i(\phi(B), B) \equiv n(B), \quad (\text{Eq. 10})$$

and the current free condition, i.e. the (constant) ion and electron flows are identical. This, together with quasineutrality states that macroscopic ion electron velocities are the same: $u_e(B) = u_i(B)$.

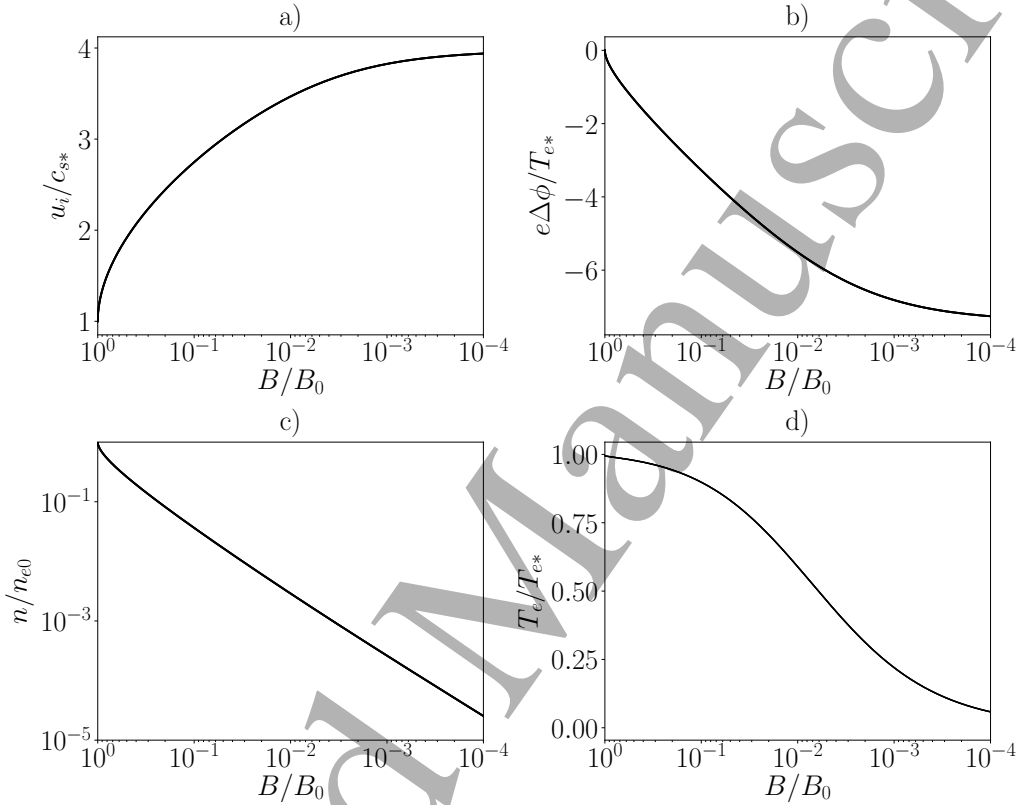


Figure 11: Plasma expansion according to the magnetic nozzle model.

The dimensionless solution of this problem depends on the injection location z_0 (or B_0), the initial velocity u_{i0}/c_{s*} , with $c_{s*} = \sqrt{T_{e*}/m_i}$ and the mass ratio m_i/m_e . Figure 11 plots plasma profiles for xenon, $u_{i0}/c_{s*} = 1$, and different z_0 . Observe, first, that $T_{e0} \simeq T_{e*}$ indicating that $f_e(z_0)$ is fully Maxwellian except for the high-energy tail of free electrons. Second, electron (collisionless) cooling is high and motivated by the emptying of regions in the electron velocity space [34]. Third, the total drop of the electric potential in the divergent nozzle for a current-free xenon plasma is about 7.4.

Figure 12 plots an “equivalent” local polytropic coefficient defined as

$$\gamma = \frac{d \ln p_e}{d \ln n_e}, \quad (\text{Eq. 11})$$

which presents large variations along the plume. The main message is then that there is not a polytropic behavior of the electrons. With this precaution taken, it still can be said that near the source electrons are

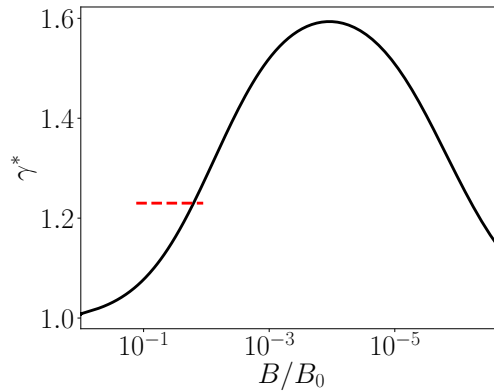


Figure 12: Equivalent local polytropic coefficient given by the model (—). The dashed horizontal red line (---) represents the average experimental value measured along the MN of the PM thruster.

near-isothermal, then tend to an adiabatic behavior, and finally to a (cold) isothermal behavior again. Observe that these changes occur along a range of B much larger than the experimental one.

Before experimental data is fitted to this model in the next Subsection, it is worth to highlight the main limitations of this ideal model. First, the model is paraxial and ignores partially the radial plasma expansion and totally the turning-back of magnetic lines. Second, it considers ions and electrons fully-magnetized down to z_∞ , so, in practice, results are valid only in nozzle near-region. Third, the electron temperature at the source is assumed isotropic, which is not the situation expected in an ECR thruster. Theoretical work is underway to cancel or at least reduce these model restrictions [34, 36–38]

IV.2 Fitting of experimental data along the MN of the PM thruster

The experimental results for the PM thruster presented in Section III are here fitted to the model just described. For a given mass flow, the fitting method is applied to the ion velocity profile experimental data of figure 9 (a) and consists in the following. A range of values of T_{e^*} is selected; remember that $T_{e^*} \approx T_{e0}$. For each T_{e^*} , the experimental point where $u_i = c_{s^*}$ is taken as origin z_0 for the fitted curve and the full theoretical curve is plotted. Figure 13 shows the model prediction for three different values of T_{e^*} overlapped with the experimental data, for 2 sccm flow. There is clearly a significant sensitivity to T_{e^*} . A Least Square Error method is implemented to select the optimal T_{e^*} . The ion velocity profiles were used for this fitting process because, first, LIF diagnostics allow to perform measurements from the thruster cavity to far downstream and, second, the uncertainty in the measurement of ion velocity is lower than the one regarding plasma density or electron temperature.

The optimal T_{e^*} for each of the experimental curves (1, 1.5 and 2 sccm) is shown with its corresponding sonic location z_0 in Table 1 (two last columns). Observe first, that the fitted sonic point is located around 1 cm from the thruster exit plane and shifts slightly downstream when increasing the mass flow rate. Second, the fitted electron temperature at the sonic point $T_{e0} \approx T_{e^*}$ decreases with the mass flow rate, a trend in agreement with experimental evidence [27].

Figure 14 compares the experimental and best-fitted theoretical curves for the ion velocity, the plasma potential, the electron density and the electron temperature. Figure 14 (a) shows that the agreement is rather

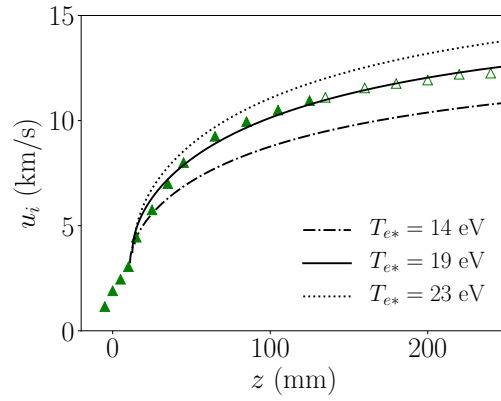


Figure 13: Experimental ion velocity curve $u_i(z)$ with the model predictions at different values of T_{e^*} for 2 sccm.

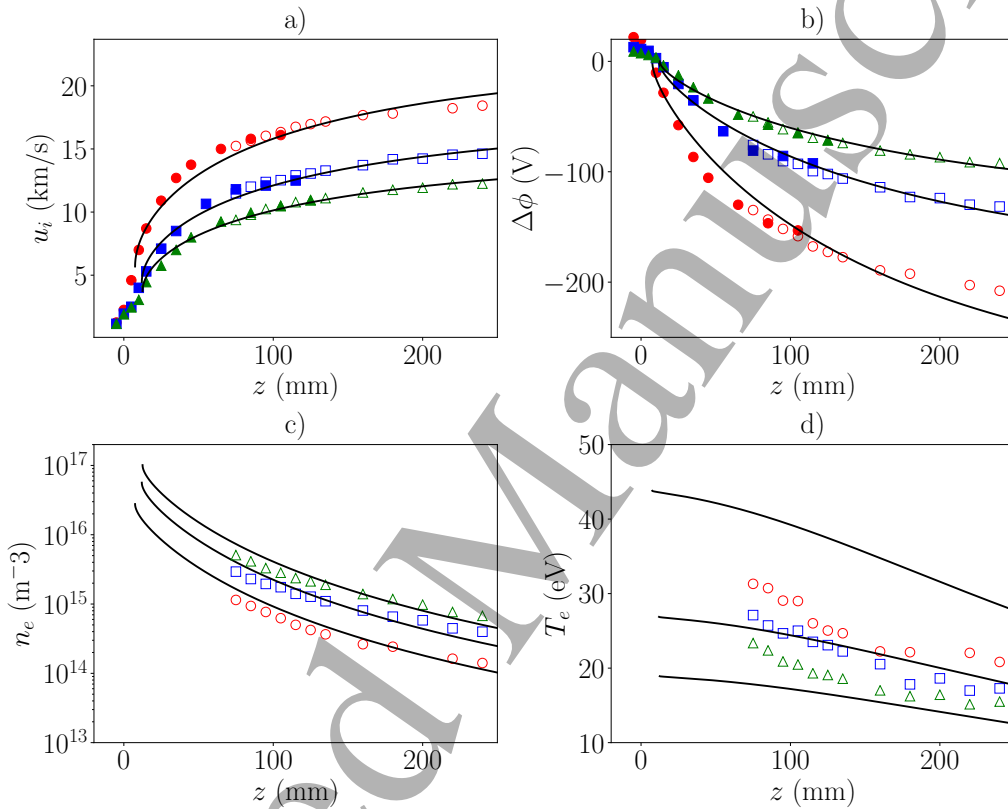


Figure 14: Plasma properties from LIF and Langmuir probe measurements compared to the quasi 1D model prediction (—) at 1 sccm (\bullet , \circ), 1.5 sccm (\blacksquare , \square) and 2 sccm (\blacktriangle , \triangle). a) Ion velocity u_i b) Plasma potential $\Delta\phi$ c) Electron density n_e d) Electron temperature T_e .

good for the supersonic u_i ; a bit worse for 1sccm. Figure 14 (b) shows also a good agreement for the plasma potential. The model estimates that at the farthest measurement point ($z = 250$ mm), the expansion is almost 70 % complete, and therefore the ratio between the total potential drop and the estimated electron temperature is around 5, which correlates well with the values found by Lafleur *et al.* in [27] in the SO thruster described here.

Figure 14 (c) compares the plasma density measured with the Langmuir probe and the theoretical curves. The plasma density at the plasma reservoir n_0 has been estimated assuming flux is conserved along the mea-

surement line (recall $n_0 \approx n_{e*}$), that is $nu_i/B = \text{const.}$ The estimated plasma density at the sonic point n_0 is 2.77, 5.56, and 10.0 in 10^{16} m^{-3} units, for 1, 1.5 and 2 sccm, respectively. The model fairly describes the density drop in the measurement region, although additional data nearest the thruster exit s would be necessary to confirm the results. However, figure 14 (d) highlights that the electron temperature estimated by the model only agrees reasonably with the experimental results at 1.5 sccm, disagreeing significantly at 1 and 2 sccm. Finally, Figure 12 compares the average experimental polytropic coefficient (in a limited plume region) with the local coefficient from the model.

It can be concluded that the comparison of data and model is acceptable and promising taking into consideration the idealizations of the model. Temperature anisotropy, likely present in the plasma at the source and neglected in the MN model here, is a first major source of discrepancies here, and possibly more acute in the temperature profiles and for low mass flow rates (due to less electron-electron collisions). Work is in progress to include anisotropy in the MN model [36]. A second one is the relevance of ionization and collisional process in the real plasma plume, also neglected in the model. Incidentally, collisions would also justify that the sonic point is here placed inside the divergent nozzle and not at a MN throat [39,40]. And finally, discrepancies should not be attributed exclusively to the theory. For instance, it is acknowledged that, in the data-set at 2 sccm, the uncertainty in the Langmuir probe post-processing or the increase of the background pressure could have an impact on the results.

IV.3 Differences between the PM and SO thrusters

Measurements of the complete plasma potential profile were only performed along the MN of the PM thruster, since it was not possible to install the SO thruster in the LIF set-up. Therefore, the experimental data from the SO thruster can not be directly related to the model results. However, interesting features can be discussed. The model enhances the large variation of the local polytropic index along the expansion, a consequence of the collisionless cooling of the different electron subpopulations. The physical mechanisms that populate the doubly-trapped electron regions are a current subject of study; two of them are collisionality and variations of the plasma potential profile during the transient set-up [37]. The 2D magnetic field topology may influence the formation of the doubly-trapped regions, and therefore have a direct impact in the local electron cooling. As commented before, Kim *et al.* [24, 25] also found different polytropic indices when varying the strength and configuration of the magnetic nozzle.

V CONCLUSIONS

Experimental measurements of ion acceleration and plasma properties along the MN of two ECR thruster prototypes have been performed. The difference between both versions relies on the MN topology, one generated by a permanent magnet (PM) and the other by a set of solenoids (SO). Langmuir probe measurements along the thruster's axis at several mass flow rates have added insight of the plasma response at different upstream conditions. The dependence of the total plasma potential drop with the mass flow rate has been identified, as well as a significant electron cooling rate along the expansion.

In the PM thruster set-up, simultaneously with the Langmuir probe, laser induced fluorescence (LIF) diagnostics have been performed to obtain the mean ion velocity from the thruster cavity to 125 mm downstream.

By assuming total ion energy is conserved, it has been possible to estimate the complete profile of plasma potential from the thruster exit to far downstream overlapping Langmuir probe and LIF measurements. Close to the thruster cavity, a broadening of the ion distribution function has been observed, which could be due to the Zeeman splitting effect. Further experiments are however needed to fully understand this outcome.

In parallel, a quasi-1D stationary fluid-kinetic model has been adapted to a fully divergent magnetic field, assuming quasineutrality and current-free expansion. The ion population is treated as a cold fluid species, while the electron distribution function is solved self-consistently accounting for magnetic mirror effects and electric potential barriers. The unique solution for the ambipolar potential profile depends only on the ion to electron mass ratio m_i/m_e and the initial ion Mach number. A total potential drop of 7.4 times the upstream electron temperature is found for xenon.

A least square error method has been implemented to compare the experimental results with the theoretical model. With this method, it has been found that the ion velocity, plasma potential and electron density profiles for different mass flow rates fit well with the model. The highest error between the model and the experimental data has been found at low mass flow rates and for the temperature profiles, which is probably related to the anisotropy of the electron energy distribution function already at the plasma reservoir plus the effects in the expansion of ionization and other collisional effects. A next step in this research will be to improve the model to incorporate electron temperature anisotropy in the plasma source and collisional effects.

On the experimental side, further work should address additional non-intrusive measurements close to the thruster exit, since for this ECR thruster prototype, the main acceleration region is concentrated in the first 10 cm from the thruster exit plane. Additionally, other diagnostics capable of detecting anisotropic plasma properties would definitely add insight to this research.

VI ACKNOWLEDGMENTS

The authors want to thank Mick Wijnen for his insightful comments and discussions. A preliminary version of this manuscript obtained the best PhD Communication Award at the Space Propulsion Conference 2018, 14-18 May, Seville. This work was made in the framework of project MINOTOR that has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 730028. Minor support came from the Spanish R & D National Plan (Grant No. PN ESP2016-75887).

VII REFERENCES

- [1] Winglee, R., Ziemba, T., Giersch, L., Prager, J., Carscadden, J., and Roberson, B., "Simulation and laboratory validation of magnetic nozzle effects for the high power helicon thruster," *Physics of Plasmas*, Vol. 14, No. 6, 2007, pp. 063501.
- [2] Charles, C., Boswell, R., and Lieberman, M., "Xenon ion beam characterization in a helicon double layer thruster," *Applied Physics Letters*, Vol. 89, No. 26, 2006, pp. 261503.
- [3] Takahashi, K., Charles, C., Boswell, R., and Ando, A., "Effect of magnetic and physical nozzles on plasma thruster performance," *Plasma Sources Science and Technology*, Vol. 23, No. 4, 2014, pp. 044004.

- [4] Pavarin, D., Ferri, F., Manente, M., Curreli, D., Guclu, Y., Melazzi, D., Rondini, D., Suman, S., Carlsson, J., Bramanti, C., Ahedo, E., Lancellotti, V., Katsonis, K., and Markelov, G., "Design of 50W Helicon Plasma Thruster," *31th International Electric Propulsion Conference, IEPC 2009-205*, 2009.
- [5] Batishchev, O., "Minihelicon plasma thruster," *Plasma Science, IEEE Transactions on*, Vol. 37, No. 8, 2009, pp. 1563–1571.
- [6] Diaz, F. and Chang, R., "The VASIMR rocket," *Scientific American*, Vol. 283, No. 5, 2000, pp. 90–97.
- [7] Arakawa, Y. and Sasoh, A., "Steady-state permanent magnet magnetoplasmadynamic thruster," *Journal of Propulsion and Power*, Vol. 5, 1989, pp. 301–304.
- [8] Krülle, G., Auweter-Kurtz, M., and Sasoh, A., "Technology and application aspects of applied field magnetoplasmadynamic propulsion," *J. Propulsion and Power*, Vol. 14, No. 5, 1998, pp. 754–763.
- [9] Sercel, J., "Simple model of plasma acceleration in a magnetic nozzle," *21st International Electric Propulsion Conference*, Vol. 1, 1990.
- [10] Jarrige, J., Elias, P.-Q., Cannat, F., and Packan, D., "Characterization of a coaxial ECR plasma thruster," *44th AIAA Plasmadynamics and Lasers Conference, San Diego*, 2013.
- [11] Takahashi, K. and Ando, A., "Laboratory Observation of a Plasma-Flow-State Transition from Diverging to Stretching a Magnetic Nozzle," *Physical Review Letters*, Vol. 118, No. 22, 2017, pp. 225002.
- [12] Arefiev, A. V. and Breizman, B. N., "Magnetohydrodynamic scenario of plasma detachment in a magnetic nozzle," *Physics of Plasmas*, Vol. 12, No. 4, 2005, pp. 043504.
- [13] Deline, C., Bengtson, R., Breizman, B., Tushentsov, M., Jones, J., Chavers, D., Dobson, C., and Schuettepelz, B., "Plume detachment from a magnetic nozzle," *Physics of Plasmas*, Vol. 16, No. 3, 2009, pp. 033502.
- [14] Olsen, C., Ballenger, M., Carter, M., Chang Diaz, F., Giambusso, M., Glover, T., Ilin, A., Squire, J., Longmier, B., Bering, E., and Cloutier, P., "Investigation of Plasma Detachment From a Magnetic Nozzle in the Plume of the VX-200 Magnetoplasma Thruster," *Plasma Science, IEEE Transactions on*, Vol. 43, No. 1, 2015, pp. 252–268.
- [15] Ahedo, E. and Merino, M., "On plasma detachment in propulsive magnetic nozzles," *Physics of Plasmas*, Vol. 18, No. 5, 2011, pp. 053504.
- [16] Ahedo, E. and Merino, M., "Two-dimensional supersonic plasma acceleration in a magnetic nozzle," *Physics of Plasmas*, Vol. 17, No. 7, 2010, pp. 073501.
- [17] Longmier, B., Bering, E., Carter, M., Cassady, L., Chancery, W., Díaz, F., Glover, T., Hershkowitz, N., Ilin, A., McCaskill, G., et al., "Ambipolar ion acceleration in an expanding magnetic nozzle," *Plasma Sources Science and Technology*, Vol. 20, 2011, pp. 015007.
- [18] Arefiev, A. and Breizman, B., "Ambipolar acceleration of ions in a magnetic nozzle," *Physics of Plasmas*, Vol. 15, No. 4, 2008, pp. 042109.

- [19] Takahashi, K., Lafleur, T., Charles, C., Alexander, P., Boswell, R., Perren, M., Laine, R., Pottinger, S., Lappas, V., Harle, T., et al., "Direct thrust measurement of a permanent magnet helicon double layer thruster," *Applied Physics Letters*, Vol. 98, 2011, pp. 141503.
- [20] Pottinger, S., Lappas, V., Charles, C., and Boswell, R., "Performance characterization of a helicon double layer thruster using direct thrust measurements," *Journal of Physics D: Applied Physics*, Vol. 44, No. 23, 2011, pp. 235201.
- [21] Vialis, T., Jarrige, J., Aanesland, A., and Packan, D., "Direct thrust measurement of an electron cyclotron resonance plasma thruster," *Journal of Propulsion and Power*, Vol. 34, No. 5, 2018, pp. 1323–1333.
- [22] Takahashi, K., Charles, C., Boswell, R., and Ando, A., "Adiabatic Expansion of Electron Gas in a Magnetic Nozzle," *Physical review letters*, Vol. 120, No. 4, 2018, pp. 045001.
- [23] Little, J. and Choueiri, E., "Electron Cooling in a Magnetically Expanding Plasma," *Physical Review Letters*, Vol. 117, No. 22, 2016, pp. 225003.
- [24] Kim, J. Y., Chung, K., Kim, S., Ryu, J. H., Chung, K.-J., and Hwang, Y., "Thermodynamics of a magnetically expanding plasma with isothermally behaving confined electrons," *New Journal of Physics*, Vol. 20, No. 6, 2018, pp. 063033.
- [25] Kim, J. Y., Jang, J. Y., Chung, K., Chung, K.-J., and Hwang, Y., "Time-dependent kinetic analysis of trapped electrons in a magnetically expanding plasma," *Plasma Sources Science and Technology*, Vol. 28, No. 07LT01, 2019.
- [26] Cannat, F., Lafleur, T., Jarrige, J., Chabert, P., Elias, P.-Q., and Packan, D., "Optimization of a coaxial electron cyclotron resonance plasma thruster with an analytical model," *Physics of Plasmas*, Vol. 22, No. 5, 2015, pp. 053503.
- [27] Lafleur, T., Cannat, F., Jarrige, J., Elias, P., and Packan, D., "Electron dynamics and ion acceleration in expanding-plasma thrusters," *Plasma Sources Science and Technology*, Vol. 24, No. 6, 2015, pp. 065013.
- [28] Jarrige, J., Correyero Plaza, S., Elias, P.-Q., and Packan, D., "Investigation on the ion velocity distribution in the magnetic nozzle of an ECR plasma thruster using LIF measurements," 2017.
- [29] Martínez-Sánchez, M., Navarro-Cavallé, J., and Ahedo, E., "Electron cooling and finite potential drop in a magnetized plasma expansion," *Physics of Plasmas*, Vol. 22, No. 5, 2015, pp. 053501.
- [30] Hutchinson, I. H., "Principles of plasma diagnostics," *Plasma Physics and Controlled Fusion*, Vol. 44, No. 12, 2002, pp. 2603.
- [31] Druyvesteyn, M. and Penning, F. M., "The mechanism of electrical discharges in gases of low pressure," *Reviews of Modern Physics*, Vol. 12, No. 2, 1940, pp. 87.
- [32] Zhang, Y., Charles, C., and Boswell, R., "Thermodynamic study on plasma expansion along a divergent magnetic field," *Physical review letters*, Vol. 116, No. 2, 2016, pp. 025001.

- 1 [33] Brown, D. L., Walker, M. L., Szabo, J., Huang, W., and Foster, J. E., "Recommended practice for use
2 of Faraday probes in electric propulsion testing," *Journal of Propulsion and Power*, Vol. 33, No. 3, 2016,
3 pp. 582–613.
- 4
5 [34] Merino, M., Mauriño, J., and Ahedo, E., "Kinetic electron model for plasma thruster plumes," *Plasma
6 Sources Science and Technology*, Vol. 27, No. 3, 2018, pp. 035013.
- 7
8 [35] Navarro-Cavallé, J., Correyero, S., and Ahedo, E., "Collisionless electron cooling on magnetized plasma
9 expansions: advances on modelling," 34th *International Electric Propulsion Conference*, paper 2015-117,
10 Electric Rocket Propulsion Society, Fairview Park, OH, Kobe, Japan, July 6-10, 2015.
- 11
12 [36] Correyero, S., Navarro-Cavallé, J., and Ahedo, E., "Expansion of a collisionless magnetized plasma plume
13 with bi-Maxwellian electrons," 52nd *Joint Propulsion Conference*, AIAA, Reston, VA, Salt Lake City,
14 Utah, July 25-27, 2016, p. 5035.
- 15
16 [37] Sánchez-Arriaga, G., Zhou, J., Ahedo, E., Martínez-Sánchez, M., and Ramos, J. J., "Kinetic features and
17 non-stationary electron trapping in paraxial magnetic nozzles," *Plasma Sources Science and Technology*,
18 Vol. 27, No. 3, 2018, pp. 035002.
- 19
20 [38] Ramos, J., Merino, M., and Ahedo, E., "Three dimensional fluid-kinetic model of a magnetically guided
21 plasma jet," *Physics of Plasmas*, Vol. 25, No. 6, 2018, pp. 061206.
- 22
23 [39] Burm, K., Goedheer, W., and Schram, D., "Mach numbers for gases and plasmas in a convergent-divergent
24 cascaded arc," *Physics of Plasmas*, Vol. 6, No. 6, 1999, pp. 2628–2635.
- 25
26 [40] Manheimer, W. and Fernsler, R., "Plasma Acceleration by Area Expansion," *IEEE Transactions on Plasma
27 Science*, Vol. 29, 2001, pp. 75–84.
- 28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60