



An algorithm for non-convex off-the-grid sparse spike estimation with a minimum separation constraint

Yann Traonmilin, Jean-François Aujol, Arthur Leclaire

► To cite this version:

Yann Traonmilin, Jean-François Aujol, Arthur Leclaire. An algorithm for non-convex off-the-grid sparse spike estimation with a minimum separation constraint. in Proceedings of iTWIST'20, Paper-ID: 7, Nantes, France, December, 2-4, 2020, Dec 2020, Nantes, France. hal-03037264

HAL Id: hal-03037264

<https://hal.science/hal-03037264>

Submitted on 3 Dec 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

An algorithm for non-convex off-the-grid sparse spike estimation with a minimum separation constraint

Yann Traonmilin^{1,2}, Jean-François Aujol² and Arthur Leclaire²

¹CNRS, ²Univ. Bordeaux, Bordeaux INP, CNRS, IMB, UMR 5251, F-33400 Talence, France.

Abstract— Theoretical results show that sparse off-the-grid spikes can be estimated from (possibly compressive) Fourier measurements under a minimum separation assumption. We propose a practical algorithm to minimize the corresponding non-convex functional based on a projected gradient descent coupled with an initialization procedure. We give qualitative insights on the theoretical foundations of the algorithm and provide experiments showing its potential for imaging problems.

1 Introduction

In the space \mathcal{M} of finite signed measures over \mathbb{R}^d , we aim at recovering a superposition of impulsive sources $x_0 = \sum_{i=1}^k a_i \delta_{t_i} \in \mathcal{M}$ from the measurements

$$y = Ax_0 + e, \quad (1)$$

where δ_{t_i} is the Dirac measure at position t_i , the operator A is a linear observation operator from \mathcal{M} to \mathbb{C}^m , $y \in \mathbb{C}^m$ are the m noisy measurements and e is a finite energy observation noise. This inverse problem (called spike super-resolution [5, 2, 14, 7, 8]) models many problems found in geophysics, microscopy, astronomy or even (compressive) machine learning [12]. For $l = 1, \dots, m$,

$$(Ax)_l = \int_{\mathbb{R}^d} \alpha_l(t) dx(t) \quad (2)$$

where $(\alpha_l)_l$ is a collection of (weighted) Fourier measurements: $\alpha_l(t) = c_l e^{-j\langle \omega_l, t \rangle}$ for some chosen frequencies $\omega_l \in \mathbb{R}^d$ and frequency dependent weights $c_l \in \mathbb{R}$. Under a separation assumption on the positions of the Diracs, i.e. when x_0 is in a set $\Sigma_{k,\epsilon}$ of sums of k ϵ -separated Diracs with bounded support, it has been shown that x_0 can be estimated by solving a non-convex problem as long as A is an appropriately designed measurement process. This ideal non-convex minimization is:

$$x^* \in \operatorname{argmin}_{x \in \Sigma_{k,\epsilon}} \|Ax - y\|_2^2, \quad (3)$$

where

$$\Sigma_{k,\epsilon} := \left\{ \sum_{r=1}^k a_r \delta_{t_r} : a \in \mathbb{R}^k, \right. \\ \left. \forall r \neq l, \|t_r - t_l\|_2 \geq \epsilon, t_r \in \mathcal{B}_2(R) \right\}, \quad (4)$$

and $\mathcal{B}_2(R) = \{t : t_r \in \mathbb{R}^d, \|t\|_2 \leq R\}$ is the ℓ^2 ball of radius R centered in 0 in \mathbb{R}^d . Stable recovery guarantees are obtained for this minimization when the number of measurements is sufficient. For example, recovery guarantees are obtained when $m \geq O(\frac{1}{\epsilon^d})$ for regular low frequency Fourier measurements [5] and when $m \geq O(k^2 d (\log(k))^2 \log(kd/\epsilon))$ for random Fourier measurements [11].

First advances in this field proposed a convex relaxation of the problem in the space of measures [5, 7]. While giving theoretical recovery guarantees, these methods are not convex with respect to the parameters due to a polynomial root finding step. They also rely on a SDP relaxation of a dual formulation squaring the size of the problem (which becomes problematic as the dimension d increases). Other methods based on greedy heuristics (CL-OMP for compressive k -means [12]) have been proposed. Nevertheless, they still lack theoretical justifications in this context while having a good scaling properties with respect to the number of parameters (amplitudes and positions) even if some first theoretical results are emerging for some particular measurement methods [9].

We propose a practical method to solve the non-convex minimization problem (3) (this abstract is a summary of [16] by the authors). Based on insights from the literature on non-convex optimization for low-dimensional models [3, 10, 17, 13, 4, 6]. Our method relies on two steps :

- Overparametrized spectral initialization: we propose a spectral initialization step for spike estimation that permits a good first estimation of the positions of the Diracs.
- Projected gradient descent algorithm in the parameter space: from [15], the global minimizer of (3) can be recovered by gradient descent as long as the initialization lies in an explicit basin of attraction of the global minimizer. It was also shown that projecting on the separation constraint improves the control on the Hessian of the function we minimize.

Parametrized formulation We consider the following parametrization of $\Sigma_{k,\epsilon}$: $\sum_{i=1}^k a_i \delta_{t_i} = \phi(\theta)$ with $\theta = (a_1, \dots, a_k, t_1, \dots, t_k) \in \mathbb{R}^{k(d+1)}$. We define

$$\Theta_{k,\epsilon} := \phi^{-1}(\Sigma_{k,\epsilon}), \quad (5)$$

the reciprocal image of $\Sigma_{k,\epsilon}$ by ϕ . Note that any parametrization of elements of $\Sigma_{k,\epsilon}$ is invariant by permutation of the positions. This is not a problem in practice for the convergence of descent algorithms. We define the parametrized functional

$$g(\theta) := \|A\phi(\theta) - y\|_2^2 \quad (6)$$

and consider the problem

$$\theta^* \in \arg \min_{\theta \in \Theta_{k,\epsilon}} g(\theta). \quad (7)$$

Since the α_l are smooth, g is a smooth function. Note that performing the minimization (7) allows to recover the minima of the ideal minimization (3), yielding stable recovery guarantees when $m \geq O(k^2 d (\log(k))^2 \log(kd/\epsilon))$ for adequately chosen Gaussian random Fourier measurements and

$m \geq O(\frac{1}{\epsilon^d})$ for regular Fourier measurements. In [15], it has been shown that the simple gradient descent converges (without projection) to the global minimum of g as long as the initialization falls in an explicit basin of attraction of this global minimum.

2 Projected gradient descent in the parameter space

For a user defined initial number of Diracs k_{in} , we consider the following iterations:

$$\theta_{n+1} = P_{\Theta_{k_{in}, \epsilon}}(\theta_n - \tau_n \nabla g(\theta_n)) \quad (8)$$

where $P_{\Theta_{k_{in}, \epsilon}}$ is a projection on the separation constraint, (notice that there may be several solutions in $\Theta_{k_{in}, \epsilon}$) and τ_n is the step size at iteration n . From [15], the Hessian of g is better controlled in $\Sigma_{k, \epsilon}$, this prompts us to add the projection step.

The projection $P_{\Theta_{k_{in}, \epsilon}}(\theta)$ could be defined naturally as a solution of the minimization problem $\inf_{\tilde{\theta} \in \Theta_{k_{in}, \epsilon}} \|\phi(\tilde{\theta}) - \phi(\theta)\|_K$, where $\|\cdot\|_K$ is a metric measuring distance between elements of $\Sigma_{k, \epsilon}$. Unfortunately such optimization is not convex in general. To avoid this, we propose a heuristic for $P_{\Theta_{k_{in}, \epsilon}}$ that consists in greedily merging Diracs that are not ϵ -separated: at each gradient descent iteration, merge Diracs that are within balls of radius ϵ by taking their barycenter.

From [15], this algorithm will converge as soon as the initialization falls into a basin of attraction of a global minimum of g . The basins of attraction get larger as the number of measurements increases (up to a fundamental limit depending on the separation ϵ and the amplitudes in x_0).

Overparametrized spectral initialization The idea of spectral initialization was used for non-convex optimization in the context of phase recovery [17] and blind deconvolution [4]. As we measure the signal x_0 at some frequencies ω_l , a natural way to recover an estimation of the signal is to back-project the irregular spectrum on a grid Γ that samples $\mathcal{B}_2(R)$ at a given precision ϵ_g . Given a vector of Fourier measurements y at frequencies $(\omega_l)_{l=1,m}$, we calculate

$$z_{\Gamma,i} = \sum_l y_l e^{j\langle \omega_l, s_i \rangle} \quad (9)$$

for some weights d_l to be chosen in the next section (the $s_i \in \Gamma$ are the grid positions). It is possible to show that when the number of measurements increases and the grid for initialization gets finer, the original positions of Diracs get better localized [16]. We then perform overparametrized hard thresholding of the z_{Γ} . We propose the initialization θ_{init} defined by

$$\phi(\theta_{init}) := x_{init} = H_{k_{in}}(z_{\Gamma}) \quad (10)$$

where for $|z_{\Gamma,j_1}| \geq |z_{\Gamma,j_2}| \geq \dots \geq |z_{\Gamma,j_n}|$, we have $H_{k_{in}}(z_{\Gamma}) = \sum_{i=1}^{k_{in}} z_{\Gamma,j_i} \mathbf{1}_{j_i}$.

3 Numerical Experiments

We experiment our algorithm in the noiseless 2d case to show the feasibility of projected gradient descent for imaging applications. The Matlab code used to generate these experiments is available at [1]. As a proof of concept we perform the recovery

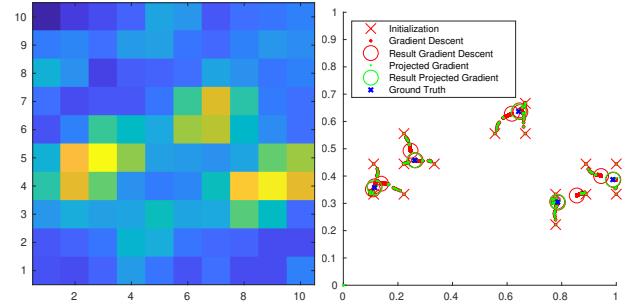


Figure 1: Result for a few spikes in 2d. Left: back-projection of measurements on a grid. Right: Initialization, gradient descent and projected gradient descent trajectories.

of 5 Diracs in 2 dimensions from $m = 120$ Gaussian random measurements. The trajectories of 500 iterations of the gradient descent and projected gradient descent are represented in Figure 1. We observe that the projection step greatly accelerates the convergence pf gradient descent.

We recover 100 Diracs, with a separation 0.01 on the square $[0, 1] \times [0, 1]$ from $m = 2000$ compressive Gaussian measurements (we would need ≈ 10000 regular measurements to obtain a separation 0.01). In practice, the grid Γ must be fine enough to overparametrize the number of Diracs with a good sampling of the ideal spectral initialization. If ϵ_g is too small, the number of initial Diracs needed to sample the energy gets larger, leading to an increased cost in the first iterations of the gradient descent. In this example we use $\epsilon_g = \epsilon$ and use $k_{in} = 4k$. We observe in Figure 2 that with these parameters all the Diracs positions are well estimated after 500 iterations of our algorithm. Similarly as our first example, we observe that spikes that are not separated in the backprojection on the grid (we observe three peaks) are well estimated by our algorithm.

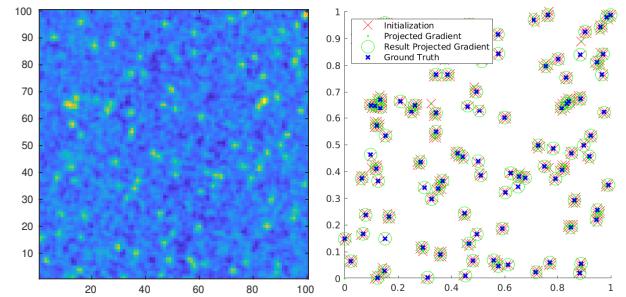


Figure 2: Result for 100 spikes in 2d. Left: back-projection of measurements on a grid. Right: Initialization, and projected gradient descent trajectories.

4 Conclusion

We gave a practical algorithm to perform off-the-grid sparse spike estimation in imaging applications, i.e. when the dimension d of the support is not to high (e.g. $d = 2$ or $d = 3$). Future research directions are:

- Full theoretical convergence proof of the algorithm with sufficient conditions on the number of measurements. One of the main question is to determine if it is possible to have a convergence guarantee without the computational cost $O((1/\epsilon_g)^d)$ of the backprojection a grid.
- A study the algorithm stability to noise and to modeling error with respect to the number of measurements.

References

- [1] Matlab code for "projected gradient descent for non-convex sparse spike estimation". yanntraonmilin.wordpress.com/code.
- [2] B. N. Bhaskar, G. Tang, and B. Recht. Atomic norm denoising with applications to line spectral estimation. *IEEE Transactions on Signal Processing*, 61(23):5987–5999, 2013.
- [3] T. Blumensath. Sampling and reconstructing signals from a union of linear subspaces. *IEEE Transactions on Information Theory*, 57(7):4660–4671, 2011.
- [4] V. Cambareri and L. Jacques. Through the haze: a non-convex approach to blind gain calibration for linear random sensing models. *Information and Inference: A Journal of the IMA*, 2018.
- [5] E. J. Candès and C. Fernandez-Granda. Towards a mathematical theory of super-resolution. *Communications on Pure and Applied Mathematics*, 67(6):906–956, 2014.
- [6] L. Chizat. Sparse optimization on measures with over-parameterized gradient descent. *arXiv preprint arXiv:1907.10300*, 2019.
- [7] Y. De Castro, F. Gamboa, D. Henrion, and J.-B. Lasserre. Exact solutions to super resolution on semi-algebraic domains in higher dimensions. *arXiv preprint arXiv:1502.02436*, 2015.
- [8] V. Duval and G. Peyré. Exact support recovery for sparse spikes deconvolution. *Foundations of Computational Mathematics*, 15(5):1315–1355, 2015.
- [9] C. Elvira, R. Gribonval, C. Soussen, and C. Herzet. Omp and continuous dictionaries: Is k-step recovery possible? In *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5546–5550. IEEE, 2019.
- [10] M. Golbabaei and M. E. Davies. Inexact gradient projection and fast data driven compressed sensing. *IEEE Transactions on Information Theory*, 2018.
- [11] R. Gribonval, G. Blanchard, N. Keriven, and Y. Traonmilin. Compressive Statistical Learning with Random Feature Moments. *Preprint*, 2017.
- [12] N. Keriven, N. Tremblay, Y. Traonmilin, and R. Gribonval. Compressive k-means. In *Acoustics, Speech and Signal Processing (ICASSP), 2017 IEEE International Conference on*, pages 6369–6373. IEEE, 2017.
- [13] S. Ling and T. Strohmer. Regularized gradient descent: a non-convex recipe for fast joint blind deconvolution and demixing. *Information and Inference: A Journal of the IMA*, 2017.
- [14] G. Tang, B. N. Bhaskar, P. Shah, and B. Recht. Compressed sensing off the grid. *IEEE transactions on information theory*, 59(11):7465–7490, 2013.
- [15] Y. Traonmilin and J.-F. Aujol. The basins of attraction of the global minimizers of the non-convex sparse spikes estimation problem. *arXiv preprint arXiv:1811.12000*, 2018.
- [16] Y. Traonmilin, J.-F. Aujol, and A. Leclaire. PROJECTED GRADIENT DESCENT FOR NON-CONVEX SPARSE SPIKE ESTIMATION. Oct. 2019. working paper or preprint.
- [17] I. Waldspurger. Phase retrieval with random gaussian sensing vectors by alternating projections. *IEEE Transactions on Information Theory*, 2018.