



HAL
open science

On Multi-Scale Processing in The Auditory System

Xiangbin Teng, David Poeppel

► **To cite this version:**

Xiangbin Teng, David Poeppel. On Multi-Scale Processing in The Auditory System. Forum Acusticum, Dec 2020, Lyon, France. pp.1407-1408, 10.48465/fa.2020.0640 . hal-03235920

HAL Id: hal-03235920

<https://hal.science/hal-03235920>

Submitted on 26 May 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

On Multi-Scale Processing in the Auditory System

Xiangbin Teng¹

David Poeppel^{2,3}

¹ Max-Planck-Institute for Empirical Aesthetics, Frankfurt am Main, Germany

² Department of Psychology, New York University, New York, NY, USA

³ Center for Language, Music, and Emotion (CLaME), Frankfurt and New York

Xiangbin.Teng@gmail.com

ABSTRACT

Natural sounds convey perceptually relevant information over multiple timescales, and the necessary extraction of multi-timescale information requires the human auditory system to work over distinct ranges. Here, we show behavioral and neural evidence that acoustic information at two discrete timescales (~ 30 ms and ~ 200 ms) is preferably coded and that the theta and gamma neural bands of the auditory cortical system correlate with temporal coding of acoustic information. We then propose a computational approach to investigate how the cortical auditory system implements canonical computations at the two prominent timescales – the auditory system constructs a multi-timescale feature space to achieve sound recognition.

1. INTRODUCTION

Correctly perceiving behaviorally significant sounds—speech, music, and the acoustic environment—requires integrating acoustic information over time to extract relevant regularities. A fundamental question about this process is: How does the auditory brain integrate information of continuously varying sounds, typical of many natural auditory signals? To derive the appropriate perceptual representations, the auditory system must extract rapidly varying information on a scale of milliseconds (approximately 10–50 ms), operating with high temporal resolution, and concurrently analyze more slowly varying signal attributes on a scale of hundreds of milliseconds (about 150–300 ms), enabling sufficient spectral resolution [1].

Here, we first present behavioral evidence that the human auditory system extracts fine-grained acoustic details at the timescale of ~ 30 ms and integrates auditory information over a timescale of ~ 200 ms to abstract global acoustic features [2]. We then looked for neural correlates for the behavioral finding by entraining the human auditory system using sounds with acoustic modulations across a wide-ranging timescales. Indeed, we found robust neural coding in the theta (4–7 Hz) and gamma (30 – 45 Hz) bands, but in between (8 – 30 Hz) [3,4].

2. BEHAVIORAL EVIDENCE

We employed a same-different paradigm and tested 10 participants on extraction of local and global acoustic features. In the local task, two sounds were presented,

which only differed in the local details; in the global task, the global pitch contours of the sounds were different. The stimulus length was varied. The participants' performance was best below 50 ms in the local task but above 200 ms in the global task.

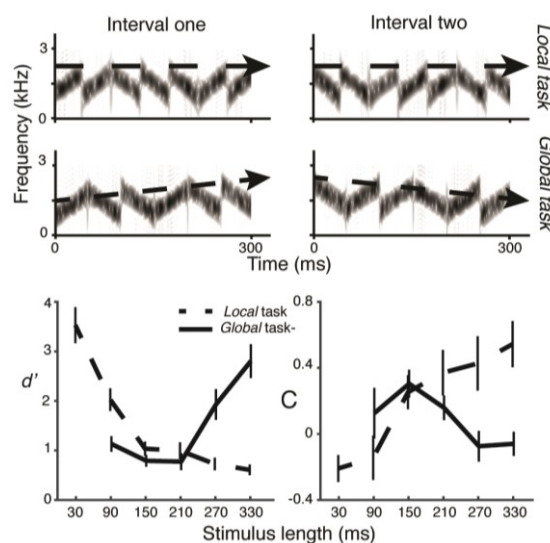


Figure 1. The upper panel shows an example of spectrograms for the ‘different’ pair of stimuli is plotted separately for the local task and the global task. The lower panel shows the results using segment duration of 30 ms, which demonstrate the opposite effect of the stimulus length on the local and global tasks.

3. NEURAL EVIDENCE

We generated sounds with temporal modulations across a wide temporal range: 5, 10, 17, 25, 37 Hz and presented those sounds to 15 participants while measuring their neural signals using Magnetoencephalography. We found robust neural entrainment in the theta and gamma bands.

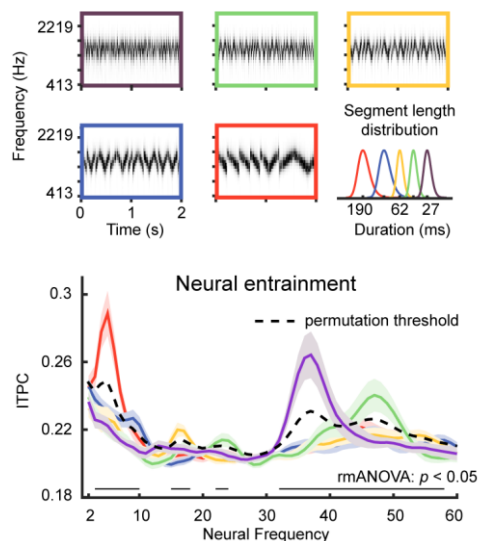


Figure 2. The upper panel shows an example of spectrograms for sounds with modulations in various temporal ranges. The lower panel shows the finding of neural entrainment.

4. ACKNOWLEDGEMENTS

The studies were supported by NIH 5R01DC005660 to DP and the Max-Planck-Society.

5. REFERENCES

- [1] D. Poeppel: “The analysis of speech in different temporal integration windows: cerebral lateralization as ‘asymmetric sampling in time.’ ” *Speech Commun.*, 41(1), 245–255, 2003.
- [2] X. Teng, X. Tian, and D. Poeppel: “Testing multi-scale processing in the auditory system” *Scientific reports*, 6, 34390, 2016
- [3] X. Teng, and D. Poeppel: “Theta and Gamma bands encode acoustic dynamics over wide-ranging timescales”. *Cerebral Cortex*, 30(4), 2600-2614, 2020.
- [4] X. Teng, X. Tian, J. Rowland, and D. Poeppel: “Concurrent temporal channels for auditory processing: Oscillatory neural entrainment reveals segregation of function at different scales”. *PLoS biology*, 15(11), e2000812, 2017